


FLUIDAxx 40 l/min

12 VDC-G 1" male-G 1" male-WML

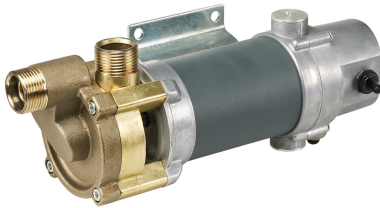

Item number: 23 645
EAN:
Discount group: D

Technical data

Connection suction side: G 1" male
 Connection discharge side: G 1" male
 Hydraulic data
 Pump design: axial gear, self-priming
 Delivery rate under free discharge up to (l/min) / (gpm): 40 / 10,6
 Suction height up to (m) / (ft): 4 / 13,1
 Discharge pressure up to (bar) / (psi): 0,8 / 11,6
 Flow media: Fuel oil, diesel, water
 Motor data
 Voltage (V): 12 V DC
 Power consumption (A): 21
 Power (W): 300
 Duty cycle (min): 15
 Torque (Nm): 0,62
 Rotation speed (rpm): 2750
 Protection class: IP 44
 Materials of parts in contact with liquid
 Pump housing: brass
 Axial gear: brass
 Dimensions LxWxH (mm) / (inch): 300 x 170 x 210 / 11,8 x 6,7 x 8,3
 Weight (kg) / (lb): 7,7 / 17

Specification

- sea-water resistant
- integral back-flow valve
- 3 hose inserts with sealing cone DN 25
- 3 sleeve nuts G 1" female, DN 25
- 3 hose clips DIN 3017, adjustable from 25-40 mm
- Suction filter (23 180)
- For mounting use mounting set (23 690)
- Designed for left hand wall mounting (WML)

Special notes

- Materials guarantee a low weight and an exceptional lifetime with optimized efficiency
- For any situation in which a battery is not available, such as construction sites, in agriculture, on boats etc.

Packaging

Dimensions LxWxH (mm) / (inch): 360 x 170 x 210 / 14,2 x 6,7 x 8,3
 Weight (kg) / (lb): 8,5 / 18,7
 Packing unit: 1.0