



MADE IN ITALY



LUBRICATION PRODUCT RANGE

PRODUCT RANGE	PRODUCT CATEGORY	PRODUCT	PAGE
KIT LUBE 	OIL PNEUMATIC PUMPS	 OIL DRUM KIT	10
		 OIL CART KIT	12
	GREASE PNEUMATIC PUMPS	 GREASE CART KIT	14
		 DRUM VISCOMAT VANE	16
		 DRUM VISCOMAT GEAR	18
		 VISCOTROLL VANE	20
		 VISCOTROLL GEAR	22
PUMPS 	PNEUMATIC PISTON PUMPS	 P 3.5:1	30
		 P 5.5:1	32
		 P 60:1 BOOSTER	34
	ELECTRIC PUMPS	 VISCOMAT VANE	38
		 VISCOMAT GEAR	40
		 VISCO FLOWMAT	42
		 VISCOMAT DC	44
		 SUZZARABLU AC/DC	46
		 PICO	48
		 MA 130	52
	PNEUMATIC DIAPHRAGM PUMPS	 MA 140	54
		 MA 180	56
		 MA 190	58
		 HAND PUMP	60
	HAND PUMPS	 BARREL PUMP	62
METERS 	ELECTRONIC METER	 K400	70
		 NEXT/2	72
		 K600/3	74
		 K600 B/3	76
		 K600/4	78
		 K200	80
	MECHANICAL METER	 K40	82
		 K33 / K44	84
		 EASY K400	92
NOZZLE METERS 		 EASY NEXT/2	94
		 K500	96
		 EASY K40	98
		 GREASTER	100
		 EASY K24 WINDSCREEN	102

PRODUCT RANGE	PRODUCT CATEGORY	PRODUCT	PAGE
NOZZLE 	NOZZLE	 EASY OIL	110
		 PISTOL-ONE	112
		 EASY WINDSCREEN	114
WASTE OIL EQUIPMENTS 	OIL DRAINER	 EASY DRAINER 80	122
		 VACUDRAINER80 / VACU80	124
	ELECTRIC OIL DRAINER	 VACUBOX	126
		 CAMBIAOLIO	128
FILTERING 		 DEPUROIL	136
		 FILTROLL	138
		 FUEL&OIL FILTERS	140
		 WATER CAPTOR	142
		 CLEAR CAPTOR	144
OIL MONITORING 	MCO 2.0 SYSTEM	 SOFTWARE MCO2.0	152
		 CONTROL UNIT	154
		 DONGLE	156
		 EASY VIEW	158
		 GPV2.0	160
	TANK LEVEL INDICATOR	 OCIO 2.0	162
		 OCIO	164
HOSE REELS 	OPEN	 OIL	172
		 GREASE	174
		 AIR/WATER	176
	CLOSED	 OIL	180
		 GREASE	182
		 AIR/WATER	184
ACCESSORIES 		 DUMBOX	192
MERCHANDISE 		 METALLIC FLOOR STAND	196
		 POSTER TUBE (10 posters' kit)	
		 UMBRELLA	
		 T-SHIRTS	
		 BAG	

PIUSI's LUBRICATION JOURNEY


THE HISTORY OF KNOW-HOW

ABOUT US

PIUSI was established in 1953 in Suzzara, in the province of Mantua (Italy). For more than 60 years, PIUSI has been the major player in the **world's leading markets** with its full range of products for transferring, refilling and measuring lubricants, fuels and liquids such as gasoline, diesel, Diesel Exhaust Fluid (DEF), oil, water and grease.

Some of PIUSI's main products include pumps, flow meters, nozzles, dispensers, hose reels, liquid level gauges, software and complete kits used by operators in agriculture, the automotive industry, workshops and garages, fleet management and transport by road and by sea. PIUSI products have many different uses such as monitoring and transferring fuel at trucking companies, refueling of agricultural vehicles, transferring fuels in construction and mining for heavy duty vehicles.

The products are intuitive and easy to use; are suitable to be installed in a variety of contexts; are all **made entirely in Italy**; and all products express the innovation, quality, professionalism and R&D that have always distinguished PIUSI. is headquartered in Suzzara (Mantova - 150 km from Milan and Venice). The company currently employs more than 250 employees between sales, administration, R&D, production and logistics. PIUSI products are sold in more than 120 countries around the world thanks to a large network of distributors and the US branch based in Fort Lauderdale, FL, serving the North and South American markets.

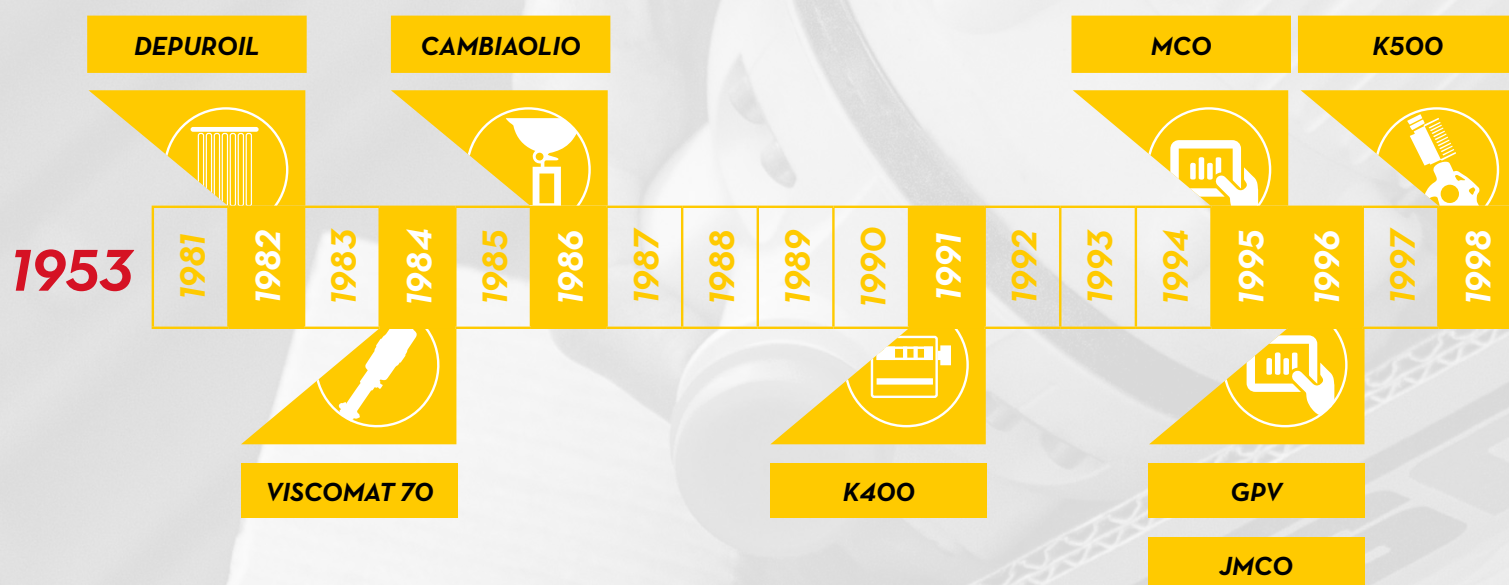



MCO 2.0



GREASTER

NEXT/2

VACUBOX

PISTOL-ONE

P3.5 - P5.5



1999

2000

2001

2002

2003

2004

2005

2006

2007

2008

2009

2010

2011

2012

2013

2014

2015

2016

2018



EASYOIL

OCIO

K40

FILTROLL

HOSE REELS

P60:1 BOOSTER




HAND PUMP

K200

VISCOMAT 90

OIL DRAINERS

VISCOMAT DC

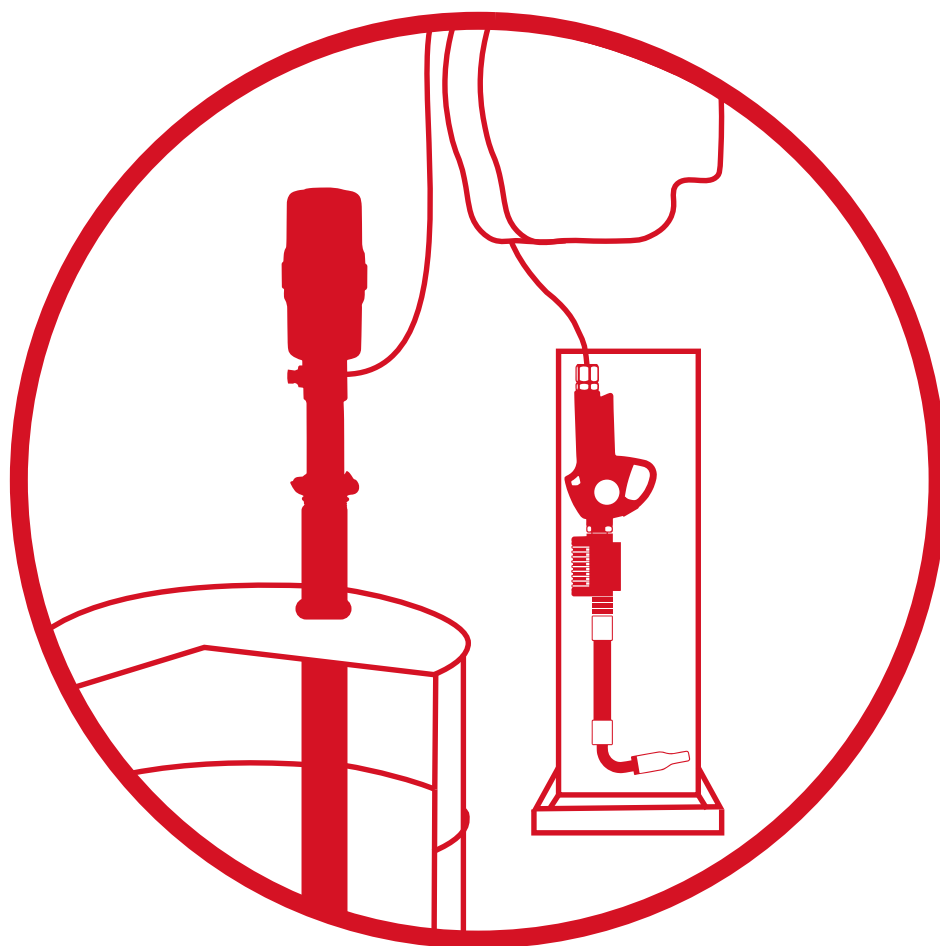

**KIT
LUBE**

PIUSI
PRODUCT
PLUS

DRUM
KIT



CART KIT





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

OIL DRUM KIT

FEATURES

- **DOUBLE EFFECT PUMP**
- **HEAVY DUTY**
- **READY TO USE**
- **COMPACT DESIGN**

PERFORMANCE

up to
21,5 L/MIN
(up to 5,7 gpm)

FLOW RATE

MID-HIGH

VISCOSITY

3-8 BAR

OPERATING PRESSURE

± 0,5 %

ACCURACY

EN.

The Oil Drum Kits are oil dispenser units suitable to transfer medium/high viscosity lubricants. They can include the P3.5:1 pneumatic pump, the Easy K400 nozzle, Hose Reel, Drip Tray and the Wall Kit.



OIL DRUM KIT WALL 200 HR





FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

IN THE BOX

OIL DRUM KIT 200



PRODUCTS	NAME	PAGE
PUMP	P3.5 940	30
FOO21402A		
NOZZLE METERS	EASY K400	94
FOO984010		
HOSE LENGTH	5 M	-
F19974000		

DETAILS



INDUSTRIAL DESIGN



RESET/CALIBRATE BUTTON



ALUMINIUM BODY



4 ROLLS HOSE GUIDE

IN THE BOX

OIL DRUM KIT 200 HR



PRODUCTS	NAME	PAGE
PUMP	P3.5 940	30
FOO21402A		
NOZZLE METERS	EASY K400	94
FOO984010		
HOSE REEL	CLOSED 60B	174
HC60121200A		
HOSE LENGTH	2 M	-
F19973000		
DRIP TRAY	-	-
F19979000		

MATERIALS

- PUMP 3.5 940 pag. 30
- NOZZLE METERS EASY K400 pag. 94
- CLOSED HOSE REEL 60B pag. 174

IN THE BOX

OIL DRUM KIT WALL 200 HR



PRODUCTS	NAME	PAGE
PUMP	P3.5 ST	30
FOO21400A		
NOZZLE METERS	EASY K400	94
FOO984010		
HOSE REEL	CLOSED 60B	174
HC60121200A		
HOSE LENGTH	2 M	-
F19973000		
DRIP TRAY	-	-
F19979000		
WALL KIT	CLOSED 60B	-
F1997200A		

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		COMPRESSION RATIO	AIR PRESSURE		AIR CONSUMPTION	PUMP	NOZZLE METERS	HOSE REEL	DRIP TRAY	SUCTION PIPE KIT
			L/MIN	GPM		BAR	PSI						
LUB000200	OIL DRUM KIT 200		21,5	5,7	3.5:1	3-8	43,5-116	200-250	P3.5 940	EASY K400	-	-	-
LUB000201	OIL DRUM KIT 200 HR		21,5	5,7	3.5:1	3-8	43,5-116	200-250	P3.5 940	EASY K400	CLOSED	YES	-
LUB000202	OIL DRUM KIT WALL 200 HR		21,5	5,7	3.5:1	3-8	43,5-116	200-250	P3.5 ST	EASY K400	CLOSED	YES	YES

OIL DRUM KIT

KIT LUBE



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

OIL CART KIT

FEATURES

- **DOUBLE EFFECT PUMP**
- **MAINTENANCE FREE**
- **READY TO USE**
- **EASY TO CALIBRATE**
- **STURDY METALLIC STRUCTURE**
- **COMPACT DESIGN**

PERFORMANCE

up to
21,5 L/MIN
(up to 5,7 gpm)

FLOW RATE

MID-HIGH

VISCOSITY

3-8 BAR

OPERATING PRESSURE

± 0,5 %

ACCURACY

EN.

The Oil Cart Kits are oil dispenser units suitable to transfer medium/high viscosity lubricants. They can include the P3.5:1 pneumatic pump, the Easy K400 nozzle, Hose Reel and the Cart.



OIL CART KIT 200 HR





FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

IN THE BOX

OIL CART KIT 60



PRODUCTS	NAME	PAGE
PUMP	P3.5 940	30
FOO21402A		
NOZZLE METERS	EASY K400	94
FOO984010		
HOSE LENGTH	2 M	-
F19973000		
CART TANK	4 WHEELS	-
F19965000		

DETAILS



INDUSTRIAL DESIGN



RESET/CALIBRATE BUTTON



LARGE DIAMETER WHEELS



4 ROLLS HOSE GUIDE

IN THE BOX

OIL CART KIT 200



PRODUCTS	NAME	PAGE
PUMP	P3.5 940	30
FOO21402A		
NOZZLE METERS	EASY K400	94
FOO984010		
HOSE LENGTH	5 M	-
F19974000		
CART TANK	4 WHEELS	-
F19966000		

MATERIALS

- PUMP 3.5 940 pag. 30
- NOZZLE METERS EASY K400 pag. 94
- CLOSED HOSE REEL 60B pag. 180

IN THE BOX

OIL CART KIT 200 HR



PRODUCTS	NAME	PAGE
PUMP	P3.5 940	30
FOO21402A		
NOZZLE METERS	EASY K400	94
FOO984010		
HOSE REEL	CLOSED 60B	180
HC60121200A		
CONNECTION	2 M	-
F19973000		
CART TANK	4 WHEELS	-
F19966000		

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		COMPRESSION RATIO	AIR PRESSURE		AIR CONSUMPTION	PUMP	NOZZLE METERS	HOSE REEL*	CART 4 WHEELS	HOSE LENGTH
			L/MIN	GPM		BAR	PSI						
LUB100060	OIL CART KIT 60		21,5	5,7	3,5:1	3-8	43,5-116	200-250	P3.5 940	K400	-	20-60 KG	2 M
LUB100200	OIL CART KIT 200		21,5	5,7	3,5:1	3-8	43,5-116	200-250	P3.5 940	K400	-	180-200 KG	5 M
LUB100201	OIL CART KIT 200 HR		21,5	5,7	3,5:1	3-8	43,5-116	200-250	P3.5 940	K400	CLOSED	180-200 KG	12 M*

OIL CART KIT

KIT LUBE



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

GREASE CART KIT

FEATURES

- **DOUBLE EFFECT PUMP**
- **SUPER SILENT**
- **HEAVY DUTY**
- **HIGH PRESSURE**

PERFORMANCE

130/160

l/min

AIR CONSUMPTION

up to
180 KG

DRUM SIZE

4-7 BAR

AIR PRESSURE

below
77 DB

NOISE LEVEL*

*Measuring made with pump assembled over drum taken from 1 meter distance without any enviromental noises.

EN.

The Grease Cart Kit is a grease dispenser unit suitable to transfer high viscosity lubricants. It includes the P60:1 pneumatic pump, the Drum Cover, Follower Plate, Drum Cart, Swivel, Hose and the Grease Gun.



GREASE CART KIT





FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX

A

AIR

A

ANTIFREEZE

B

BIODIESEL

D

DIESEL

F

FOOD

G

GASOLINE

G

GREASE

K

KEROSENE

O

OIL

U

AdBlue®


W

WATER

W

WINDSCREEN

CHARTS

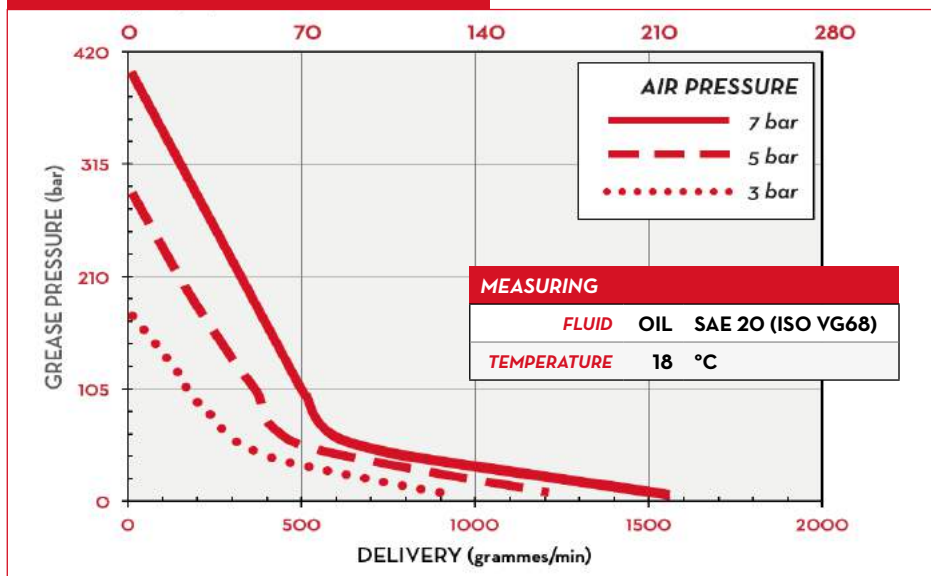

IN THE BOX

- PUMP P60:1
- DRUM
- DRUM COVER
- FOLLOWER PLATE
- DRUM TROLLEY
- INSTRUCTION MANUAL

DETAILS



STURDY STRUCTURE



HEAVY DUTY BODY

MATERIALS

- PUMP P60:1

pag. 34

DRUM SIZE	DRUM COVER	FOLLOWER PLATE	DRUM CART	SWIVEL	HOSE	GREASE GUN	PUMP
12/16 KG	Ø 285 mm F20792000	Ø 270 mm F20793000	2 WHEELS F20595000	F2060400A	F2060000A	F20605000	P60:1 470 FOO21605A
18/30 KG	Ø 320 mm F20593000	Ø 300 mm F20594000	2 WHEELS F20595000	F2060400A	F2060000A	F20605000	P60:1 470 FOO21605A
50/60 KG	Ø 385 mm F20598000	Ø 370 mm F20599000	4 WHEELS F19965000	F2060400A	F2060000A	F20605000	P60:1 730 FOO21606A
50/70 KG	Ø 420 mm F20596000	Ø 400 mm F20597000	4 WHEELS F19965000	F2060400A	F2060000A	F20605000	P60:1 730 FOO21606A
180/200 KG	Ø 610 mm F20606000	Ø 590 mm F20607000	4 WHEELS F19966000	F2060400A	F2060000A	F20605000	P60:1 940 FOO21607A

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	DRUM SIZE		COMPRESSION RATIO	AIR PRESSURE		AIR CONSUMPTION	PUMP	NOZZLE	CART WHEELS	HOSE LENGHT
				KG		BAR	PSI	L/MIN				
DRUM 12/16 KG - Ø 285 MM												
LUB300285	GREASE CART KIT 12/16 KG	G ²	18	30	60:1	4-7	58-116	130-160	P60:1 470	GREASE GUN	2	2 M
DRUM 18/30 KG - Ø 320 MM												
LUB300320	GREASE CART KIT 18/30 KG	G ²	18	30	60:1	4-7	58-116	130-160	P60:1 470	GEASE GUN	2	2 M
DRUM 50/60 KG - Ø 385 MM												
LUB300385	GREASE CART KIT 50/60 KG	G ²	50	60	60:1	4-7	58-116	130-160	P60:1 730	GREASE GUN	4	2 M
DRUM 50/70 KG - Ø 420 MM												
LUB300420	GREASE CART KIT 50/70 KG	G ²	50	60	60:1	4-7	58-116	130-160	P60:1 730	GREASE GUN	4	2 M
DRUM 180/200 KG - Ø 610 MM												
LUB300610	GREASE CART KIT 180/200 KG	G ²	180	200	60:1	4-7	58-116	130-160	P60:1 940	GREASE GUN	4	2 M

GREASE CART KIT

KIT LUBE

15



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

DRUM VISCOMAT VANE

FEATURES

- **ADJUSTABLE BYPASS**
- **READY TO USE**
- **NUTATING DISC FLOW METER (K33 ONLY)**

PERFORMANCE

up to
28 L/MIN
(up to 7 gpm)

FLOW-RATE

up to
500
cSt

VISCOSITY

± 1 %

ACCURACY

available

AC
version

VOLTAGE

EN.

The Piusi Drum Viscomat Vane is an oil dispenser kit suitable to transfer low viscosity lubricants. It includes the AC powered Piusi Viscomat pump, vane version, and the Self 3000 manual nozzle.



DRUM VISCOMAT VANE



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
000270000	18	39,6	480X370X265	18,9X14,6X10,4		1
000270010	21	46,3	500X380X280	19,7X15X11		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

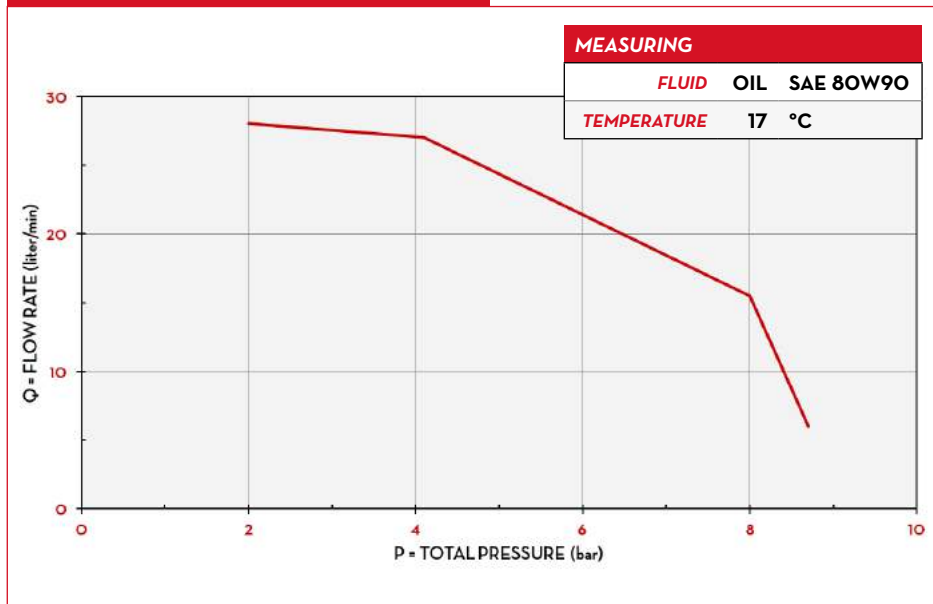

IN THE BOX

- VISCOMAT PUMP
- SUCTION PIPE
- K33 METER (ONLY FOR METER VERSION)
- INSTRUCTION MANUAL

DETAILS



SELF3000 MANUAL NOZZLE



K33 MECHANICAL METER



EXTENSIBLE PIPE

MATERIALS

- VISCOMAT PUMP

pag. 38

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	NOZZLE	HOSE LENGTH
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.			
000270000	DRUM VISCOMAT 70M		28	7	230	750	4,6	VISCOMAT 70 M	SELF3000	4
000270010	DRUM VISCOMAT 70M K33		25	7	230	750	4,6	VISCOMAT 70 M	SELF3000	4

THE UNIT CAN ALSO BE SUPPLIED FOR OPERATING UNDER DIFFERENT VOLTAGES AND WITH METER

DRUM VISCOMAT VANE

KIT LUBE

17



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

DRUM VISCOMAT GEAR

FEATURES

- ADJUSTABLE BYPASS (AC ONLY)
- SUPER SILENT
- EASY TO CALIBRATE (K400 ONLY)
- ERGONOMIC GRAB NOZZLE

PERFORMANCE

up to
9 L/MIN
(up to 2 gpm)

FLOW-RATE

up to
2000
cSt

VISCOSITY

± 0,5 %

ACCURACY

available
AC / DC
version
VOLTAGE

EN.

The Piusi Drum Viscomat Gear is an oil dispenser kit suitable to dispense medium/high viscosity lubricants. It is available in AC/DC version both powered by the Piusi Viscomat pump, gear version.



DRUM VISCOMAT GEAR DC



DRUM VISCOMAT GEAR AC



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO26102D	18	39,6	480X370X265	18,9X14,6X10,4		1
FOO26100D	18	39,6	480X370X265	18,9X14,6X10,4		1
FOO26200D	18	39,6	480X370X265	18,9X14,6X10,4		1
FOO268000	9	19,8	357X357X275	14,1X14,1X10,8		1
FOO268010	9	19,8	480X370X265	18,9X14,6X10,4		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

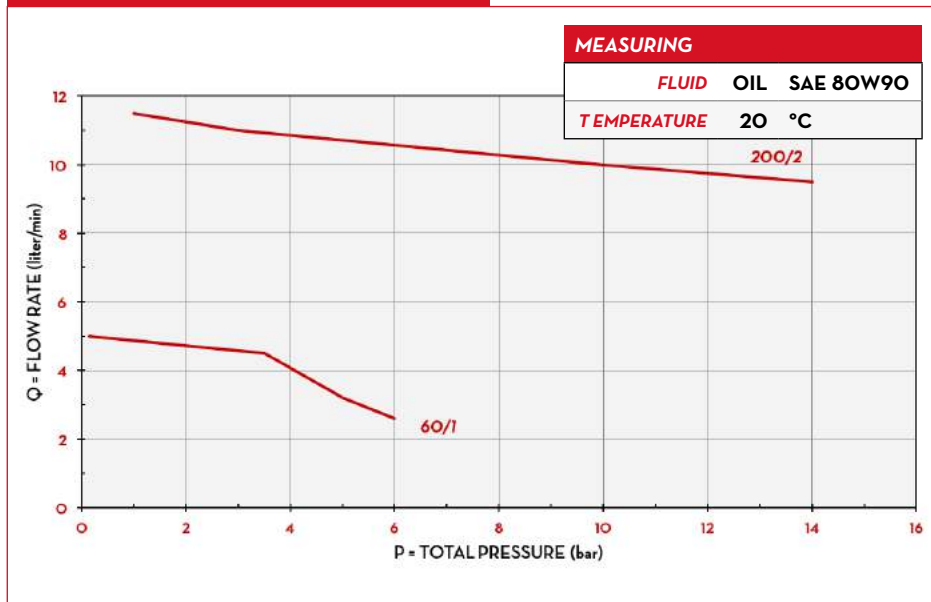

IN THE BOX

- VISCOMAT PUMP
- EASY OIL / EASY K400 NOZZLE
- SUCTION HOSE
- FOOT VALVE
- INSTRUCTION MANUAL

DETAILS



ERGONOMIC NOZZLE



FOOT VALVE



KIT CABLE

MATERIALS

- VISCOMAT PUMP pag. 38
- EASY OIL pag. 110
- EASY K400 pag. 94

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VOLTAGE			PUMP	NOZZLE	HOSE LENGTH
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.			
FO026102D	DRUM VISCOMAT 200/2 110V/60HZ		9	2	110	1500	15	VISCOMAT 200/2	EASYOIL	4
FO026100D	DRUM VISCOMAT 200/2 230V/50-60HZ		9	2	230-50/60	800/950	3,8/4,6	VISCOMAT 200/2	EASYOIL	4
FO026200D	DRUM VISCOMAT 200/2 230V/50/60HZ K400		9	2	230-50/60	800/950	3,8/4,6	VISCOMAT 200/2	EASY K400	4
FO0268000	DRUM VISCOMAT 60/1 12V		4	1,2	12	150	18,5	VISCOMAT 60/1	EASYOIL	4
FO0268010	DRUM VISCOMAT 60/1 24V K400		4	1,2	24	150	18,5	VISCOMAT 60/1	EASY K400	4

THE UNIT CAN ALSO BE SUPPLIED FOR OPERATING UNDER DIFFERENT VOLTAGES AND WITH METER

DRUM VISCOMAT GEAR

KIT LUBE

19



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VISCOTROLL VANE

FEATURES

- ADJUSTABLE BYPASS
- READY TO USE
- NUTATING DISC FLOW METER (K33 ONLY)
- STURDY DESIGN CART

PERFORMANCE

up to
25 L/MIN
(up to 7 gpm)

FLOW-RATE

up to
500
cSt

VISCOSITY

± 1 %

ACCURACY

below
70 dB

NOISE LEVEL



EN.

The Piusi Viscotroll Vane is a mobile oil dispenser suitable to transfer low viscosity lubricants. This versatile mobile cart includes the AC powered Piusi Viscomat pump, vane version, and the Self 3000 manual nozzle.



VISCOTROLL VANE

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
VISCOTROLL						
000263100	34	75	1090X690X300	42,9X27,2X11,8		1
000263110	36	79,4	1090X690X300	42,9X27,2X11,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER




WINDSCREEN

CHARTS

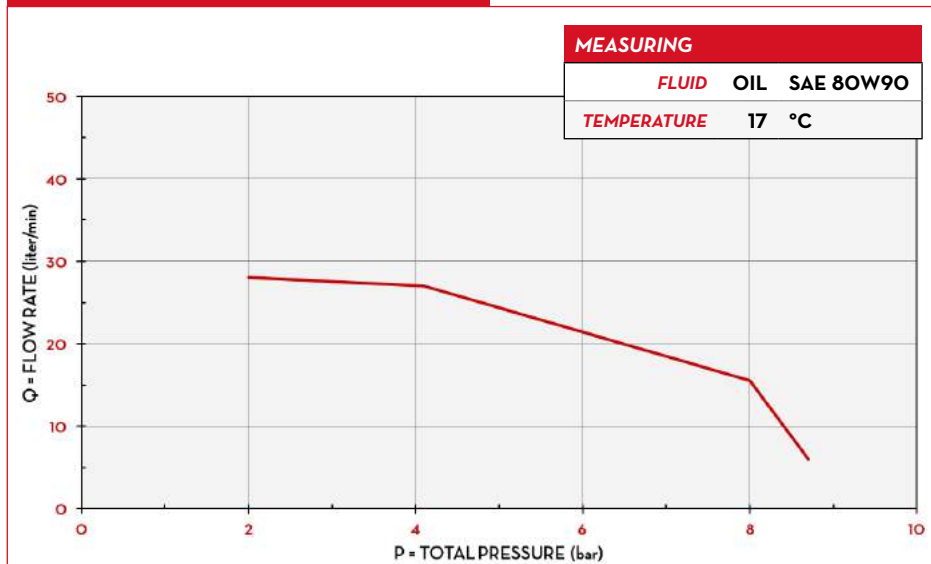

DIMENSIONS

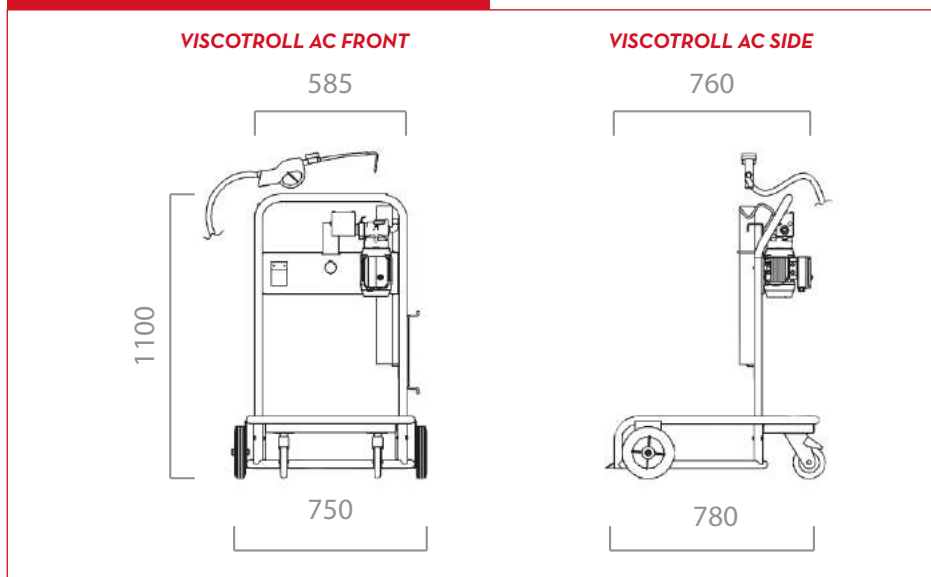

IN THE BOX

- VISCOMAT PUMP
- KIT FOOT VALVE
- SELF 3000 NOZZLE
- INSTRUCTION MANUAL

DETAILS



MATERIALS

- VISCOMAT VANE PUMP pag. 38

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VISCOSITY	VOLTAGE			METER	PUMP	NOZZLE
			L/MIN	GPM		CST MAX.	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	MOD.	MOD.
VISCOTROLL											
000263100	VISCOTROLL 70		25	6,6	500	230/50	750	4,6	-	VISCOMAT 70M	SELF 3000
000263110	VISCOTROLL 70/K33		25	6,6	500	230/50	750	4,6	K33	VISCOMAT 70M	SELF 3000

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGE AND FREQUENCY

VISCOTROLL VANE

KIT LUBE

21



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VISCOTROLL GEAR

FEATURES

- ON DEMAND FLOW
- ADJUSTABLE BYPASS
- SUPER SILENT
- READY TO USE
- OVAL GEAR METER
- STURDY DESIGN CART

PERFORMANCE

up to
9 L/MIN
(up to 2,4 gpm)

FLOW-RATE

up to
2000
cSt

VISCOSITY

± 0,5 %

ACCURACY

below
65 dB

NOISE LEVEL

EN.

The Piusi Viscotroll Gear is a mobile oil dispenser suitable to dispense medium/high viscosity lubricants. This versatile mobile cart is available in AC/DC version both powered by the Piusi Viscomat pump, gear version.



VISCOTROLL GEAR AC



VISCOTROLL GEAR DC



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
VISCOTROLL DC 120/1						
FOO263200	57	125,7	1090X690X320	42,9X27,2X11,6		1
FOO263210	58	125,9	1090X690X320	42,9X27,2X11,6		1
VISCOTROLL AC 200						
FOO26300D	34	75	1090X690X300	42,9X27,2X11,8		1
FOO26301D	35	77	1090X690X300	42,9X27,2X11,8		1
FOO26302D	36	79,4	1090X690X300	42,9X27,2X11,8		1
FOO26303D	37	81,6	1090X690X300	42,9X27,2X11,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER




WINDSCREEN

CHARTS

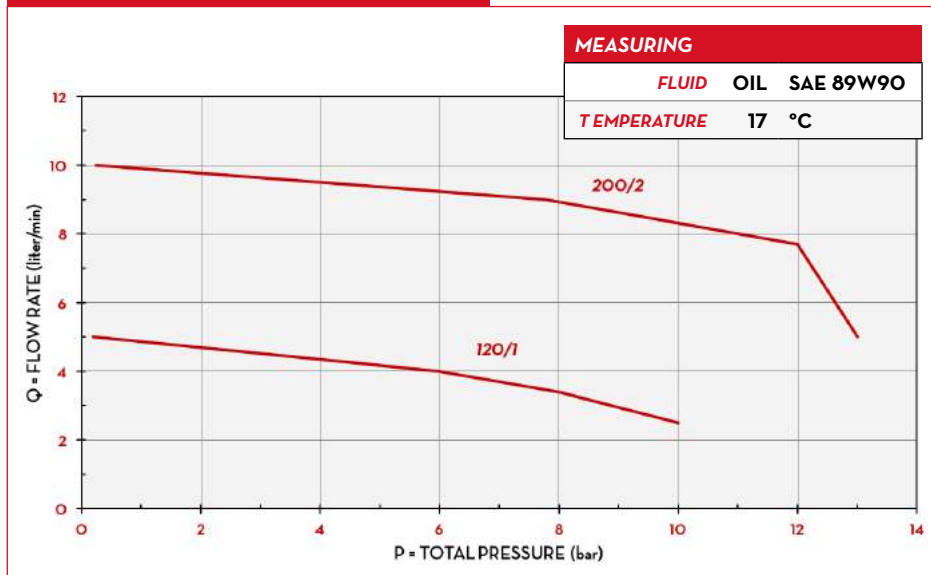

DIMENSIONS

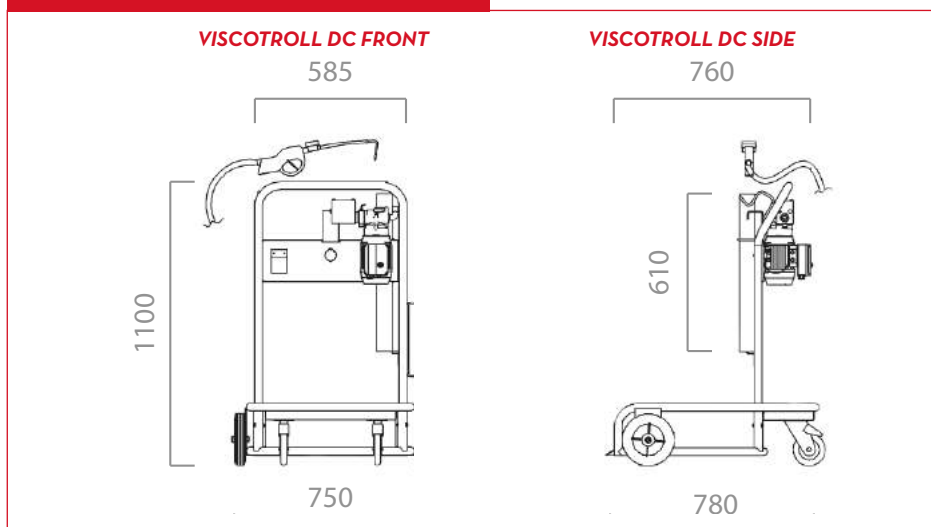

IN THE BOX

- SWIVEL PROTECTION (VISCOTROLL 200 MODELS)
- VISCOMAT PUMP
- INLINE VALVE
- EASYOIL / EASY K400 NOZZLE
- BATTERY
- BATTERY CHARGER (ONLY DC VERSION)
- CART
- KIT FOOT VALVE
- INSTRUCTION MANUAL

DETAILS



GEAR PUMP



PRESSURE SWITCH



K400 NOZZLE METER



BATTERY CHARGER

MATERIALS

- VISCOMAT DC PUMP pag. 44
- VISCOMAT GEAR PUMP pag. 40
- VISCO-FLOWMAT PUMP pag. 42
- EASYOIL NOZZLE pag. 110

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		VISCOSITY	VOLTAGE			METER	PUMP	NOZZLE	PRESSURE SWITCH	BATTERY CHARGER
			L/MIN	GPM		CST MAX.	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	MOD.	MOD.		TYPE
VISCOTROLL DC 120/1													
FO0263200	VISCOTROLL 120/1 DC PST.		6	1,6	2000	12	360	30	-	VISCOMAT 120/1 DC	EASYOIL	YES	230
FO0263210	VISCOTROLL 120/1 DC PST.K 400		6	1,6	2000	12	360	30	K400	VISCOMAT 120/1 DC	EASY K400	YES	230
VISCOTROLL AC 200													
FO026300D	VISCOTROLL 200/2 AC		9	2,4	2000	230/50	800	3,8	-	VISCOMAT GEAR 200/2	EASYOIL	YES	-
FO026301D	VISCOTROLL 200/2 AC - K400		9	2,4	2000	230/50	800	3,8	K400	VISCOMAT GEAR 200/2	EASY K400	YES	-
FO026302D	VISCOTROLL 200/2 AC - PST		9	2,4	2000	230/50	800	3,8	-	VISCO-FLOWMAT 200/2	EASYOIL	YES	-
FO026303D	VISCOTROLL 200/2 AC - PST - K400		9	2,4	2000	230/50	800	3,8	K400	VISCO-FLOWMAT 200/2	EASY K400	YES	-

VISCOTROLL GEAR

KIT LUBE

23



PUMPS

PIUSI PRODUCT PLUS

PNEUMATIC PISTON PUMPS



NO ELECTRIC
POWER NEEDED

DIRECTLY MOUNTED
ON THE DRUM

NO PRESSURE
SWITCH NEEDED

WIDE RANGE
OF APPLICATION


SUITABLE FOR
HIGH VISCOSITY
FLUIDS

MOST POPULAR IN
LUBRICATION
MARKET

SUITABLE FOR
CLASSIFIED ZONE

SUITABLE FOR LOW
TEMPERATURE
FLUIDS

ELECTRIC PUMPS

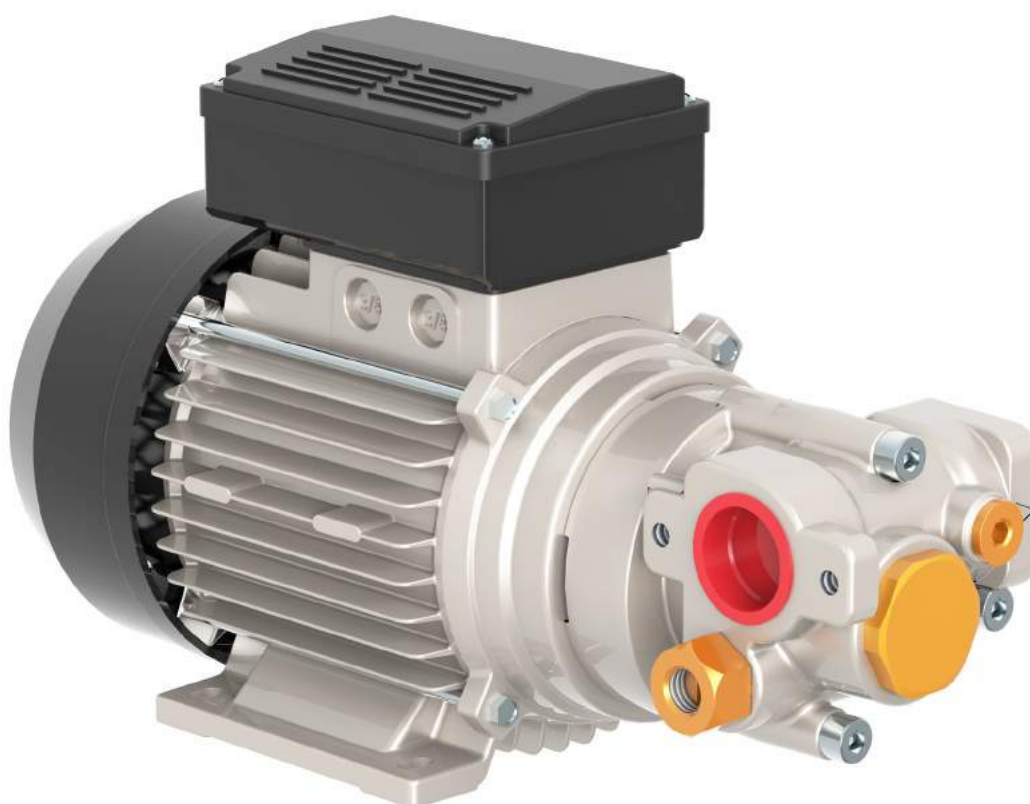

**MAINTENANCE
FREE**

**LOW INSTALLATION
COST**

**NO COMPRESSED
AIR REQUIRED**

**ENERGY
EFFICIENCY
DURABILITY**

**LOW STRESS
OPERATION SYSTEM**

**STABLE FLOW-RATE
NO PULSATION
LOW STRESS**

**SUITABLE FOR
INDUSTRIAL
APPLICATIONS**

LOW NOISE

**SUITABLE FOR
EXTREME WEATHER
CONDITIONS**



PIUSI
PRODUCT
PLUS

PNEUMATIC
DIAPHRAGM
PUMPS



SUITABLE TO BE
INSTALLED ON
DRUMS/IBC/WALLS

RATIO 1:1

SUITABLE TO
TRANSFER
WASTE OIL

HIGH FLOW-RATE

SUITABLE FOR
CLASSIFIED ZONE

SUITABLE FOR
BLENDING

DOUBLE EFFECT

HAND PUMPS



LONG LASTING

READY TO USE

MAINTENANCE
FREE

NO ENERGY
REQUIRED

NO ADDITIONAL
COST





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

P3.5:1

FEATURES

- **DOUBLE EFFECT**
- **LOW OPERATIONAL SPEED**
- **DURABILITY**
- **MAINTENANCE FREE**
- **+16% HYDRAULIC POWER COMPARED TO THE MARKET STANDARD**
- **COMPOSITE MATERIAL BODY**
- **NO OXIDATION / PARTICLES PROOF**
- **METAL FREE DIFFUSER**

PERFORMANCE

up to
21,5 L/MIN
(up to 5,7 gpm)

FLOW RATE

MID-HIGH

VISCOSITY

3-8 BAR

OPERATING PRESSURE

below
77 DB

NOISE LEVEL*

*Measuring made with pump assembled over drum taken from 1 meter distance without any enviromental noises.



EN.

The Piusi P3.5:1 is an oil piston pump, suitable for transferring medium viscosity oil over short distances. It is manufactured using selected materials to ensure high performance and durability.



PIUSI 3.5 ST



PIUSI 3.5 940

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
PIUSI 3.5 ST						
FOO21400A	3,5	7,7	495X125X130	19,5X4,9X5,1	-	1
PIUSI 3.5 940						
FOO21402A	5,5	12,1	1250X125X130	43,2X4,9X5,1	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

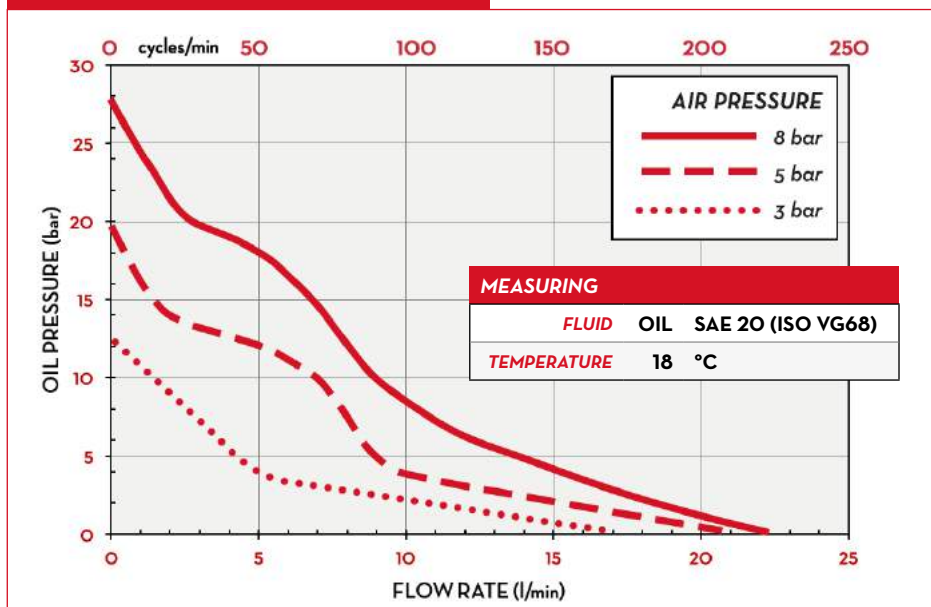


SIZE AND WEIGHT


PIUSI P3.5 ST

MEASURE "A"	445MM
MEASURE "B"	175MM
WEIGHT	4,5KG

PIUSI 3.5 ST



PIUSI 3.5 940

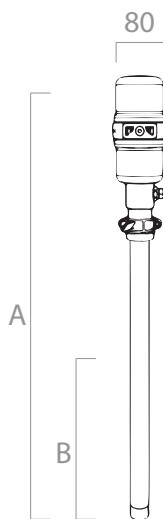

PIUSI P3.5 940

MEASURE "A"	1210MM
MEASURE "B"	940MM
WEIGHT	5,5KG

IN THE BOX




- BANG ADAPTER
- PIUSI P3.5 ST / 940
- INSTRUCTION MANUAL

DETAILS



BANG ADAPTOR



HEAVY DUTY BODY



STURDY STRUCTURE



INDUSTRIAL DESIGN

MATERIALS

- AIR MOTOR: TECHNOPOLYMER
- BODY: DIE CAST STEEL
- SEAL: NBR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		COMPRESSION RATIO	AIR PRESSURE		AIR CONSUMPTION	SUCTION PIPE		INLET	OIL SIDE CONNECTION		POLYURETHANE SEALS
			L/MIN	GPM		BAR	PSI	L/MIN	MM	LENGHT MM		BSP	SUCTION BSP	OUTLET BSP
PIUSI 3.5 ST														
FOO21400A	PIUSI P3.5 ST		21,5	5,7	3.5:1	3-8	43,5-116	200-250	50	175	F.1/4"	F.1"	M.1/2"	YES
PIUSI 3.5 940														
FOO21402A	PIUSI P3.5 940		21,5	5,7	3.5:1	3-8	43,5-116	200-250	50	940	F.1/4"	F.1"	M.1/2"	YES

P3.5:1

PUMPS

31



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

P5.5:1

FEATURES

- **DOUBLE EFFECT**
- **LOW OPERATIONAL SPEED**
- **DURABILITY**
- **MAINTENANCE FREE**
- **+11% HYDRAULIC POWER COMPARED TO THE MARKET STANDARD**
- **COMPOSITE MATERIAL BODY**
- **NO OXIDATION / PARTICLES PROOF**
- **METAL FREE DIFFUSER**

PERFORMANCE

up to

15,5 L/MIN

(up to 5,7 gpm)

FLOW RATE

MID-HIGH

VISCOSITY

3-8 BAR

PRESSURE

below

77 DB

NOISE LEVEL*

*Measuring made with pump assembled over drum taken from 1 meter distance without any enviromental noises.



EN.

The Piusi P5.5:1 is an oil piston pump, suitable for transferring medium viscosity oil over medium distances. It is manufactured using selected materials to ensure high performance and durability.

**PIUSI 5.5 ST****PIUSI 5.5 940**

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
PIUSI 5.5 ST						
FOO21401A	5,5	7,7	495X125X130	19,5X4,9X5,1	-	1
PIUSI 5.5 940						
FOO21403A	5,5	12,1	1250X125X130	43,2X4,9X5,1	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

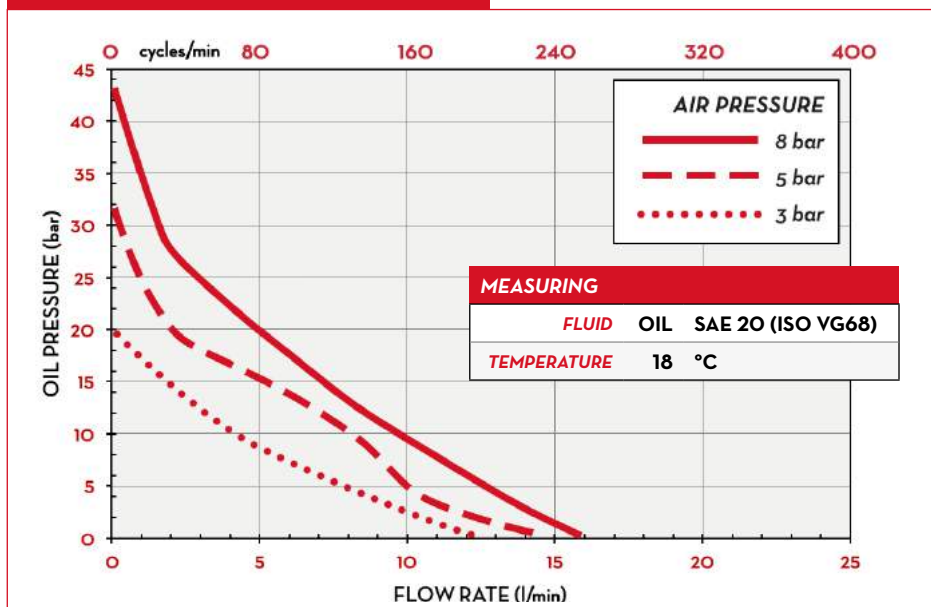


SIZE AND WEIGHT


PIUSI P5.5 ST

MEASURE "A"	445MM
MEASURE "B"	175MM
WEIGHT	3,5KG

PIUSI 5.5 ST



PIUSI 5.5 940

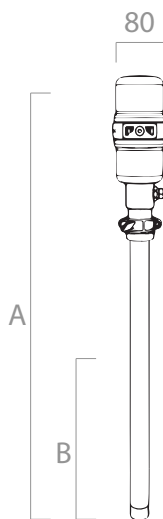

PIUSI P5.5 940

MEASURE "A"	1210MM
MEASURE "B"	940MM
WEIGHT	5,5KG

IN THE BOX




- BANG ADAPTER
- PIUSI P5.5 ST / 940
- INSTRUCTION MANUAL

DETAILS



BANG ADAPTOR



HEAVY DUTY BODY



STURDY STRUCTURE



INDUSTRIAL DESIGN

MATERIALS

- AIR MOTOR: TECHNOPOLYMER
- BODY: DIE CAST STEEL
- SEAL: NBR

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		COMPRESSION RATIO	AIR PRESSURE		AIR CONSUMPTION	SUCTION PIPE		INLET	OIL SIDE CONNECTION		POLYURETHANE SEALS
			L/MIN	GPM		BAR	PSI	L/MIN	MM	LENGHT MM		BSP	SUCTION BSP	OUTLET BSP
PIUSI 5.5 ST														
FOO21401A	PIUSI P5.5 ST		15,5	4,1	5.5:1	3-8	43,5-116	200-250	42	175	F.1/4"	F.1"	M.1/2"	YES
PIUSI 5.5 940														
FOO21403A	PIUSI P5.5 940		15,5	4,1	5.5:1	3-8	43,5-116	200-250	42	940	F.1/4"	F.1"	M.1/2"	YES

P5.5:1

PUMPS

33



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

P60:1 BOOSTER

FEATURES

- **DOUBLE EFFECT**
- **DURABILITY**
- **METAL FREE DIFFUSER**
- **MAINTENANCE FREE**
- **SUPER SILENT**
- **COMPOSITE MATERIAL BODY**
- **NO OXIDATION**
- **PARTICLES PROOF**
- **METAL FREE DIFFUSER**

PERFORMANCE

130/160

l/min

AIR CONSUMPTION

 up to
180 KG

DRUM SIZE

4-7 BAR

AIR PRESSURE

 below
77 DB

NOISE LEVEL*

*Measuring made with pump assembled over drum taken from 1 meter distance without any enviromental noises.

EN.

The Piusi 60:1 BOOSTER is an industrial piston pump suitable for transferring grease and thick oil at high pressure, over both short and long distances, thanks to the high compression ratio.


PIUSI P60:1 BOOSTER


PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
PIUSI P60:1 BOOSTER						
FOO21605A	3,8	8,4	495X125X130	19,5X4,9X5,1	-	1
FOO21606A	5	7,7	1035X125X130	40,7X4,9X5,1	-	1
FOO21607A	5,8	12,1	1250X125X130	43,2X4,9X5,1	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER




WINDSCREEN

CHARTS

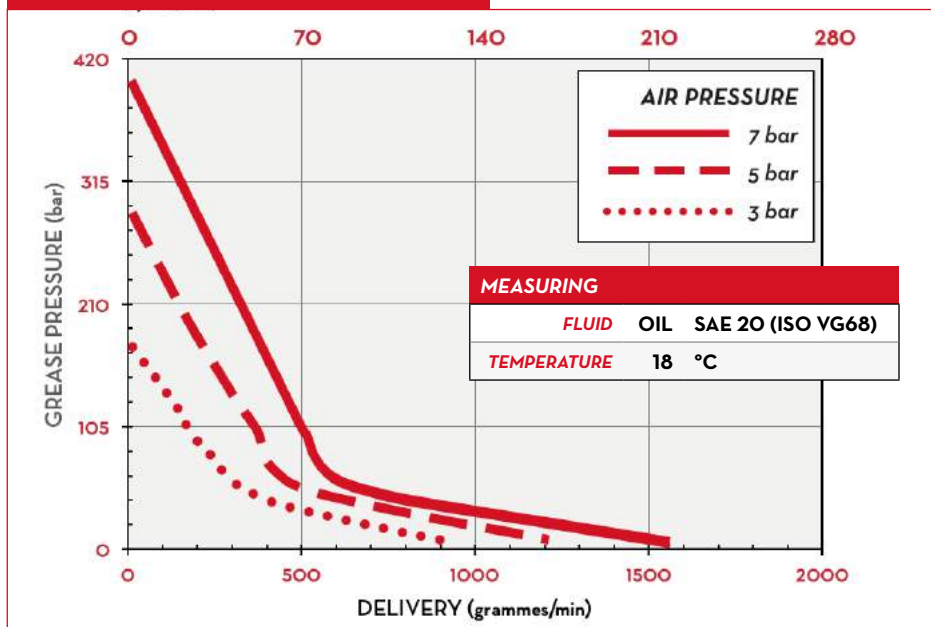

DIMENSIONS

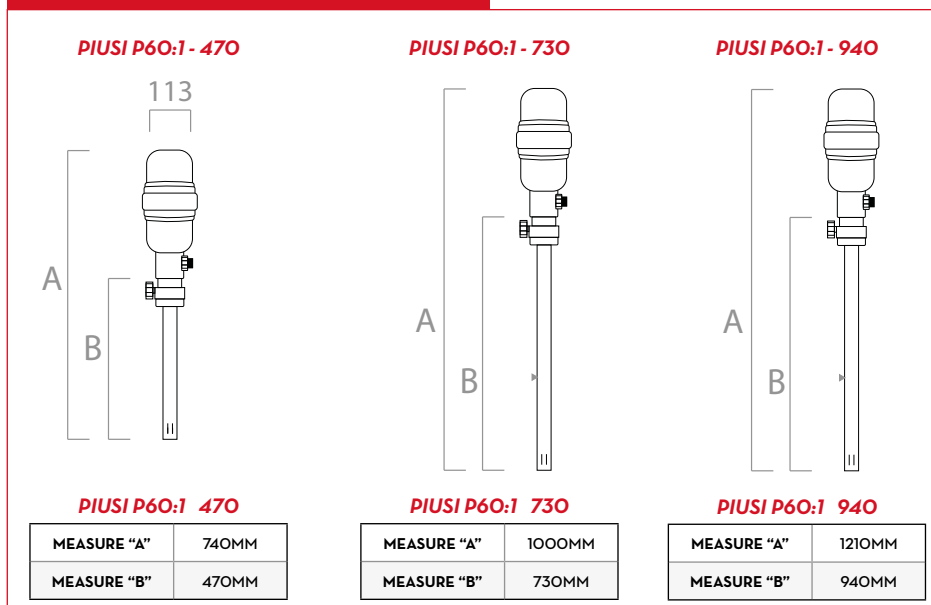

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	DRUM-SIZE		SUCTION PIPE		COMPRESSION RATIO	AIR PRESSURE		AIR CONSUMPTION	AIR INLET CONNECTION	GREASE SIDE CONNECTION	POLYURETHANE SEALS
			KG		Ø MM	LENGHT MM		BAR	PSI	L/MIN	BSP	OUTLET BSP	BSP
PIUSI P60:1 BOOSTER													
FOO21605A	PIUSI P60:1 470	G	18	30	30	470	60:1	4-7	58-116	130-160	F.1/4"	M.1/4"	YES
FOO21606A	PIUSI P60:1 730	G	50	60	30	730	60:1	4-7	58-116	130-160	F.1/4"	M.1/4"	YES
FOO21607A	PIUSI P60:1 940	G	180	200	30	940	60:1	4-7	58-116	130-160	F.1/4"	M.1/4"	YES

IN THE BOX



- P60:1 BOOSTER PUMP
- INSTRUCTION MANUAL

DETAILS



HEAVY DUTY BODY



INDUSTRIAL DESIGN



STURDY STRUCTURE

MATERIALS

- AIR MOTOR: TECHNO POLYMER
- BODY: DIE CAST STEEL
- SEAL: NBR

P60 BOOSTER:1

PUMPS

35



PNEUMATIC PISTON PUMPS ACCESSORIES

P3.5:1 - P5.5:1

SUCTION PIPE



CODE	DESCRIPTION	WEIGHT (KG)	LENGHT (MM)
F19975000	20L DRUM	0,4	385
F19976000	50/60 L DRUM	0,5	555
F19977000	180/200 L DRUM	0,6	765
F19978000	TANK/IBC	0,7	955

KIT SUCTION PIPE



CODE	DESCRIPTION	WEIGHT (KG)	Ø	LENGHT (MT)
F1997200A	KIT SUCTION PIPE WITH WALL BRACKET	1,3	1"	2

OIL HOSES



CODE	DESCRIPTION	TYPE	Ø	LENGHT (MT)	PRESSURE
F19973000	OIL PIPE	F/F	1/2"	2	150 BAR
F19974000	OIL PIPE	M/F	1/2"	5	150 BAR

KIT TROLLEY



CODE	DESCRIPTION
F19965000	4 WHEELS, 50/70 KG
F19966000	4 WHEELS, 180/200 KG

DRIP TRAY



CODE	DESCRIPTION
F19979000	DRIP TRAY FOR NOZZLE

P60 BOOSTER:1

DRUM COVER	CODE	DESCRIPTION (Ø)	SUITABLE FOR	GREASE GUN	CODE	DESCRIPTION
	F20792000	285MM	PIUSI P60:1 470		F20605000	RIGID SPOUT
	F20593000	320MM	PIUSI P60:1 470		F20605010	FLEX SPOUT
	F20598000	385MM	PIUSI P60:1 730			
	F20596000	420MM	PIUSI P60:1 730			
	F20606000	610MM	PIUSI P60:1 940			
DRUM TROLLEY	CODE	DESCRIPTION	SUITABLE FOR	GREASE HOSE	CODE	DESCRIPTION
	F20595000	2WHEELS-12/30KG DRUMS	PIUSI P60:1 470		F2060000A	2M - M/F - 1/4
	F20593000	2WHEELS-18/30KG DRUMS	PIUSI P60:1 470		F2060100A	4M - M/F - 1/4
	F20598000	2WHEELS-50/60KG DRUMS	PIUSI P60:1 730		F2060200A	6M - M/F - 1/4
	F20596000	2WHEELS-50/70KG DRUMS	PIUSI P60:1 730			
FOLLOWER PLATE	CODE	DESCRIPTION	SUITABLE FOR	FILTER REGULATOR	CODE	DESCRIPTION
	F20793000	270MM	PIUSI P60:1 470		F21471000	REGULATOR GAUGE 1/4"
	F20594000	300MM	PIUSI P60:1 470		F21473000	REGULATOR GAUGE 1/2"
	F20599000	370MM	PIUSI P60:1 730			
	F20597000	400MM	PIUSI P60:1 730			
	F20607000	590MM	PIUSI P60:1 940			
PRESSURE REGULATOR	CODE	DESCRIPTION				
	F21470000	WITH GAUGE 1/4"				
	F21472000	WITH GAUGE 1/2"				
SWIVEL	CODE	DESCRIPTION				
	F20603000	SWIVEL 1/4 M/F				
	F2060400A	-Z-SWIVEL 1/4 M/F				



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VISCOMAT VANE

FEATURES

- **ADJUSTABLE BYPASS**
- **MULTI-PURPOSE PUMP**
- **SUITABLE TO TRANSFER WASTE OILS**

PERFORMANCE

up to
500
cSt

VISCOSITY

up to
50 L/MIN

FLOW-RATE

below
70 dB

NOISE LEVEL*

EN.

The Piusi VISCOMAT VANE is an electric vane pump suitable for transferring low and medium viscosity fluids. The pump is equipped with a built-in adjustable bypass.



VISCOMAT VANE



PACKAGING

CODE	WEIGHT		PACKAGING				
	KG	LBS	MM	INCH	PCS/PALLET		PCS/BOX
VISCOMAT 70							
FO033490A	14,15	31,1	355X185X285	-	60	72	1
FO033190A	14,15	31,1	350X200X280	-	60	72	1
VISCOMAT 90							
FO0303M00	14,15	31,1	350X200X280	-	60	72	1
000303000	14,15	31,1	350X200X280	-	60	72	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN


CHARTS

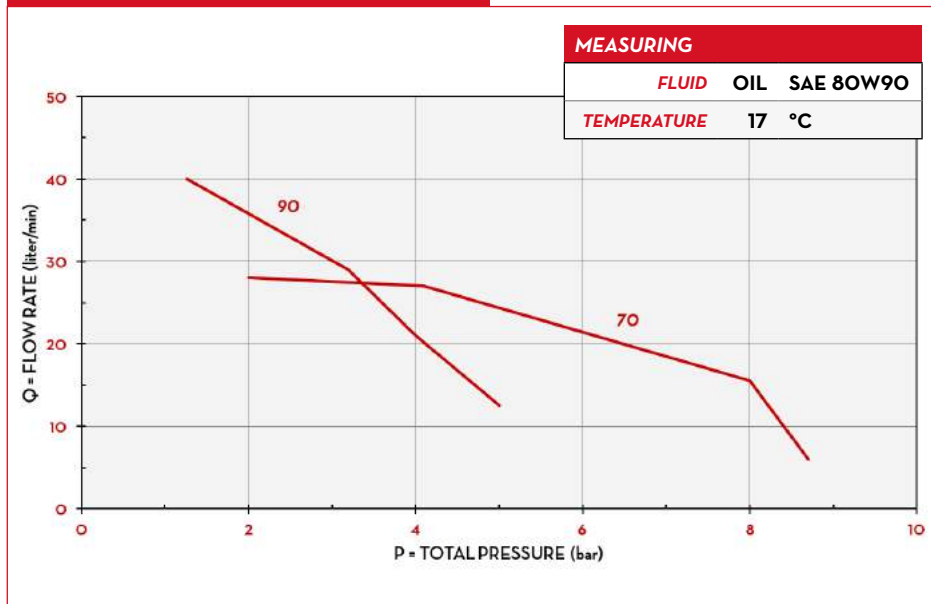

IN THE BOX

- VISCOMAT VANE PUMP
- INSTRUCTION MANUAL

DETAILS



VANE ROTORS



ON / OFF SWITCH




ADJUSTABLE BYPASS VALVE

MATERIALS

- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VANES: TECHNOPOLYMER
- SHAFT: STEEL

DIMENSIONS

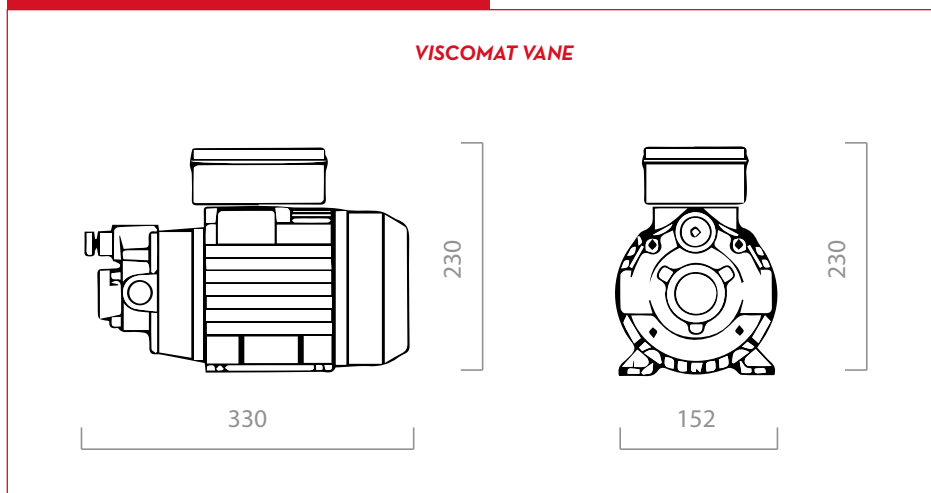

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		AIR PRESSURE		VOLTAGE				RPM	INLET OUTLET BSP	BYPASS VALVE
			L/MIN	GPM	BAR	PSI	SINGLEPHASE MOTOR V./HZ	THREEPHASE MOTOR V./HZ	POWER WATT	AMP. MAX			
VISCOMAT 70													
FO033490A	VISCOMAT 70 M. 230/50/60	 	25	7	6	85	230/50/60	-	1200/1000	5,5-5,1	1470/1650	1" BSP	YES
FO033190A	VISCOMAT 70 T. 400/50/60	 	25	7	6	85	-	400/50 - 460/60	650/1000	2,2/3,1	1470/1750	1" BSP	YES
VISCOMAT 90													
FO0303M00	VISCOMAT 90 M. 230/50/60	 	50	13	5	71	230/50/60	-	1350/1600	6,2/4,9	1400/1600	1" BSP	NO
000303000	VISCOMAT 90 T. 400/50	 	50	13	5	71	-	400/50	2000	5	1450	1" BSP	YES

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGE AND FREQUENCY - (*) WITHOUT ADJUSTABLE BYPASS VALVE

VISCOMAT VANE



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VISCOMAT GEAR

FEATURES

- **ADJUSTABLE BYPASS**
- **SUPER SILENT**
- **SMALL SIZE**
- **EASY TO FIT**

PERFORMANCE

up to
2000
cSt

VISCOSITY

up to
14 L/MIN
from 9-14 l/min

FLOW-RATE

up to
25 bar
from 12-25 bar

PRESSURE

below
70 dB

NOISE LEVEL*

EN.

The Piusi VISCOMAT GEAR is an electric gear pump suitable for transferring high viscosity oils. The built-in adjustable bypass allows to regulate the delivery pressure.



VISCOMAT GEAR



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO030403D	9	19,8	350X200X280	13,8X7,9X11		1
FO030430D	12,5	27,6	350X200X280	13,8X7,9X11		1
FO030401D	12,5	27,6	350X200X280	13,8X7,9X11		1
FO030405D	9	19,8	350X200X280	13,8X7,9X11		1
FO0304T1D	12,5	27,6	350X200X280	13,8X7,9X11		1
FO0304T4D	12,5	27,6	350X200X280	13,8X7,9X11		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

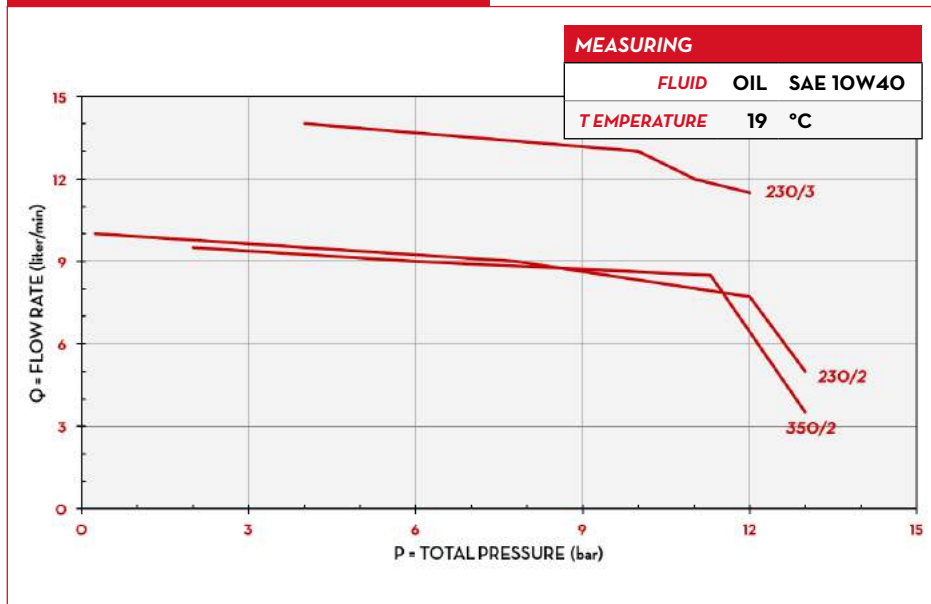

IN THE BOX

- KIT PRIMING DEVICE
- VISCOMAT GEAR PUMP
- INSTRUCTION MANUAL

DETAILS




ADJUSTABLE BYPASS VALVE



ON / OFF SWITCH

DIMENSIONS

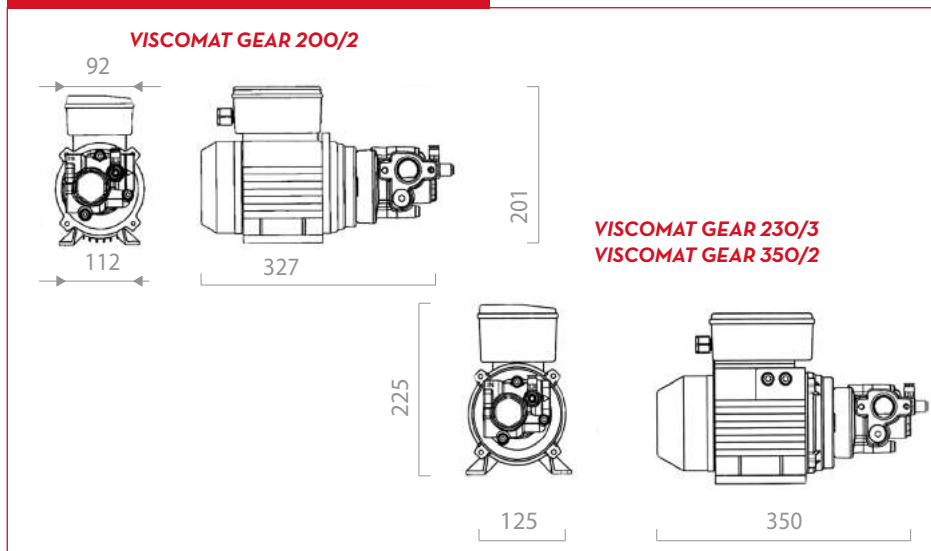

MATERIALS

- BODY: CAST IRON
- GEARS: SINTERED STEEL
- SHAFT: STEEL
- BYPASS: BRASS

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		AIR PRESSURE		VOLTAGE			RPM	INLET OUTLET BSP	BYPASS VALVE
			L/MIN	GPM	BAR	PSI	MOTOR V./ HZ	POWER WATT	AMP. MAX.			
FO030403D	VISCOMAT 200/2 M. SINGLE-PHASE		9	2,4	12	170	230/50/60	800/950	3,8/4,6	1450/1700	1" BSP	YES
FO030430D	VISCOMAT 230/3 M. SINGLE-PHASE		14	3,7	16	227	230/50	1250	6	1400	1" BSP	YES
FO030401D	VISCOMAT 350/2 M. SINGLE-PHASE		9	2,4	25	355	230/50	1200	6	1250	1" BSP	YES
FO030405D	VISCOMAT 200/2 THREE-PHASE		9	2,4	12	170	400/50	550	1,5	1450	1" BSP	YES
FO0304T1D	VISCOMAT 350/2 THREE-PHASE		9	2,4	25	355	400/50	750	2,5	1450	1" BSP	YES
FO0304T4D	VISCOMAT 230/3 THREE-PHASE		14	3,7	12	170	400/50	1200	2,7	1400	1" BSP	YES

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGE AND FREQUENCY - (*) WITHOUT ADJUSTABLE BYPASS VALVE

VISCOMAT GEAR

PUMPS

41



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VISCO FLOWMAT

FEATURES

- ON DEMAND FLOW
- ADJUSTABLE BYPASS
- ELECTRONIC PRESSURE SWITCH
- BUILT-IN SECURITY VALVE

PERFORMANCE

up to
2000
cSt

VISCOSITY

up to
14 L/MIN
from 9-14 l/min

FLOW-RATE

up to
25 bar
from 12-25 bar


PRESSURE

below
70 dB

NOISE LEVEL*

EN.

The Piusi VISCO-FLOWMAT is an electric gear pump suitable for transferring high viscosity oils. This self-priming pump is equipped with a pressure switch that features an automatic pump switch-off at the end of the delivery.

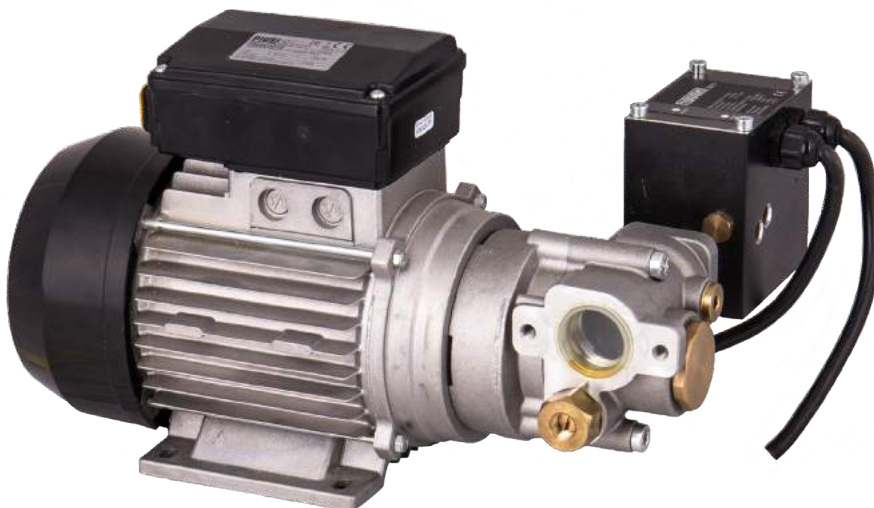

VISCO-FLOWMAT



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO030200D	12	26,5	360X360X300	14,2X14,2X11,8		1
FO030204D	15	33,1	360X360X300	14,2X14,2X11,8		1
FO030206D	15	33,1	360X360X300	14,2X14,2X11,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

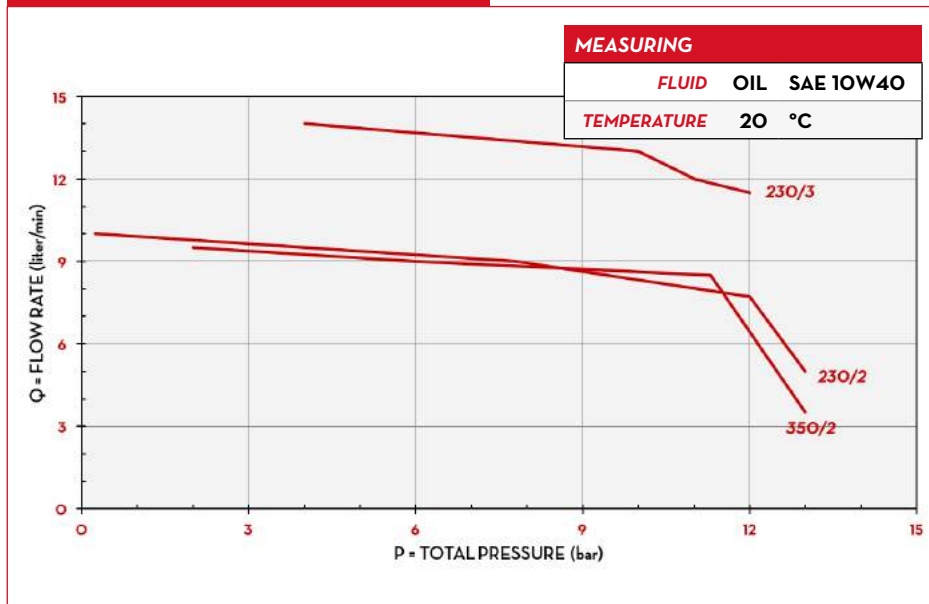

IN THE BOX

- KIT PRIMING DEVICE
- KIT FLOWMAT
- VISCOMAT GEAR PUMP
- INSTRUCTION MANUAL

DETAILS



ON / OFF SWITCH



ADJUSTABLE BYPASS VALVE




PRESSURE SWITCH

MATERIALS

- BODY: CAST IRON
- GEARS: SINTERED STEEL
- SHAFT: STEEL
- BYPASS: BRASS

DIMENSIONS

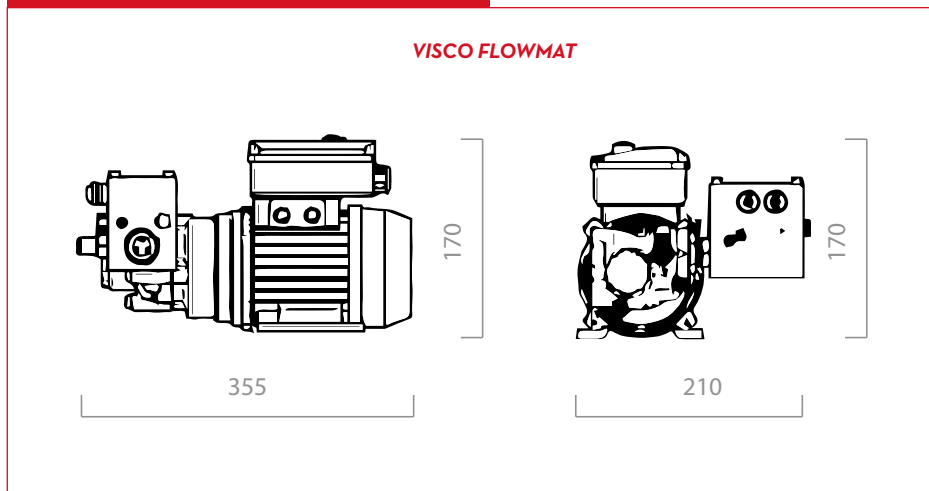

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		AIR PRESSURE		VOLTAGE			RPM	INLET OUTLET BSP	BYPASS VALVE
			L/MIN	GPM	BAR	PSI	MOTOR V./ HZ	POWER WATT	AMP. MAX.			
FO030200D	VISCO FLOWMAT 200/2		9	2,4	12	170	230/50/60	800	3,8	1450	1" BSP	YES
FO030204D	VISCO FLOWMAT 230/3		14	3,7	16	227	230/50	1200	6	1450	1" BSP	YES
FO030206D	VISCO FLOWMAT 350/2		9	2,4	25	355	230/50	1250	6	1450	1" BSP	YES

UPON REQUEST IT IS AVAILABLE WITH DIFFERENT VOLTAGE AND FREQUENCY

VISCO FLOWMAT

PUMPS

43



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VISCOMAT DC

FEATURES

- BUILT-IN BYPASS
- SMALL SIZE
- EASY TO FIT
- MULTI-PURPOSE PUMP

PERFORMANCE

up to
2000
cSt

VISCOSITY

up to
10 L/MIN
from 4-10 l/min

FLOW-RATE

up to
5 bar

PRESSURE

below
65 dB

NOISE LEVEL*

EN.

The Piusi VISCOMAT DC is an electric DC gear pump suitable for transferring high viscosity oils. The pump is equipped with a built-in pressure bypass.



VISCOMAT DC



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO030902A	3	6,6	200X120X140	7,9X4,7X5,5		1
FO030901A	4,9	10,8	345X175X255	13,6X6,9X10		1
FO030900A	4,9	10,8	345X175X255	13,6X6,9X10		1
FO031002A	3	6,6	200X120X140	7,9X4,7X5,5		1
FO031001A	4,9	10,8	345X175X255	13,6X6,9X10		1
FO031000A	4,9	10,8	345X175X255	13,6X6,9X10		1
FO0311000	4,9	10,8	345X175X255	13,6X6,9X10		1
FO0311010	4,9	10,8	345X175X255	13,6X6,9X10		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

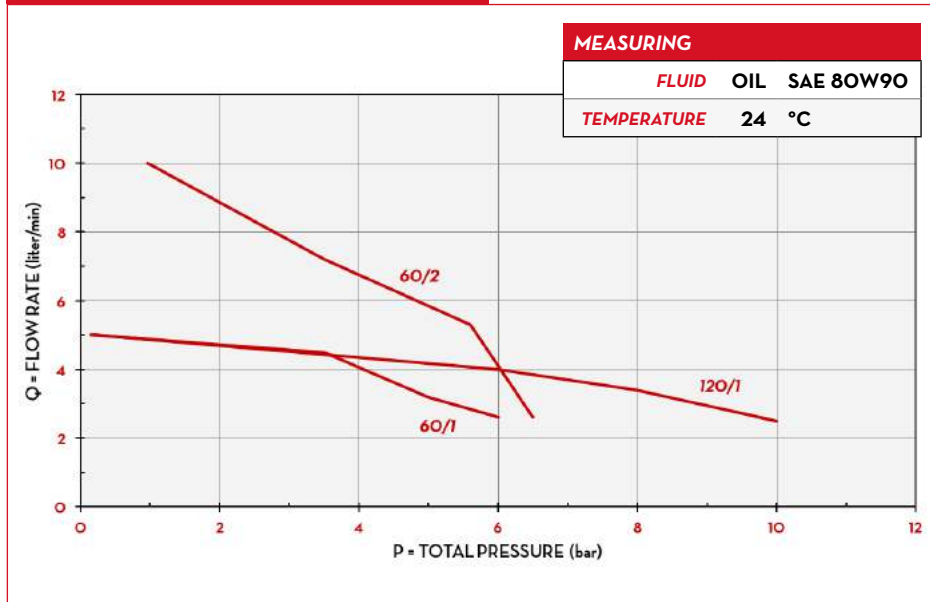

IN THE BOX

- VISCOMAT GEAR PUMP
- INSTRUCTION MANUAL

DETAILS




GEAR ROTOR



ON / OFF SWITCH

DIMENSIONS

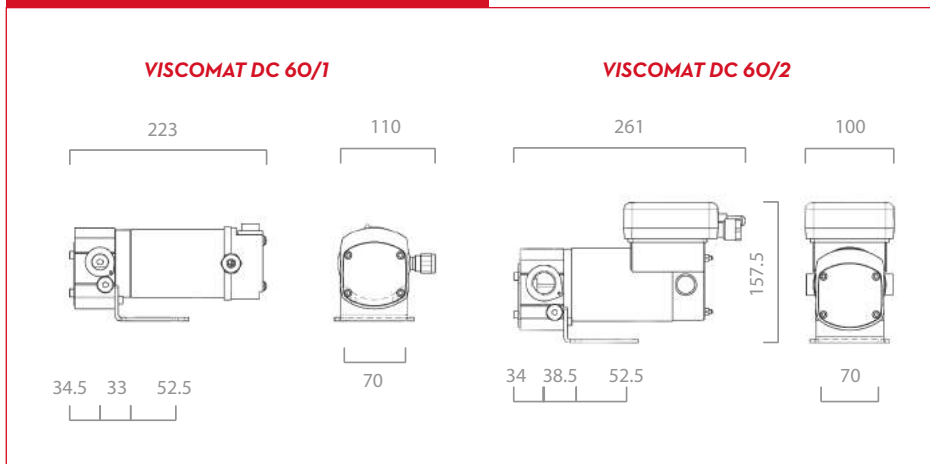

MATERIALS

- BODY: CAST IRON
- GEARS: SINTERED STEEL
- SHAFT: STEEL
- BYPASS: BRASS

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		AIR PRESSURE		VOLTAGE			RPM	INLET OUTLET BSP	PRESSURE SWITCH
			L/MIN	GPM	BAR	PSI	MOTOR V./ HZ	POWER WATT	AMP. MAX.			
FO030902A	VISCOMAT DC 60/1 12 V		4	1,2	5	70	12	150	18,5	2900	1/2" BSP	NO
FO030901A	VISCOMAT DC 60/2 12 V (*)		10	2,8	4	57	12	300	35	2900	3/4" BSP	NO
FO030901A	VISCOMAT DC 120/1 12 V		5	1,4	10	140	12	200	26,5	2900	1/2" BSP	NO
FO031002A	VISCOMAT DC 60/1 24 V		4	1,2	5	70	24	150	9,5	2900	1/2" BSP	NO
FO031001A	VISCOMAT DC 60/2 24 V (*)		10	2,8	4	57	24	300	18	2900	3/4" BSP	NO
FO031000A	VISCOMAT DC 120/1 24 V		5	1,4	10	140	24	200	19,5	2900	1/2" BSP	NO
FO0311000	VISCOMAT DC 120/1 12 V PST		5	1,4	10	140	12	200	22,5	2900	1/2" BSP	YES
FO0311010	VISCOMAT DC 120/1 24 V PST		5	1,4	10	140	24	200	19,5	2900	1/2" BSP	YES

(*) FOR VISCOMAT DC 60/2 MAX OIL VISCOSITY 600 CST

VISCOMAT DC

PUMPS

45



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

SUZZARABLUE AC/DC

FEATURES

- **TECHNOPOLYMER DIAPHRAGM**
- **READY TO USE**
- **MULTI-PURPOSE PUMP**
- **SELF PRIMING**
- **BUILT-IN BYPASS VALVE**

PERFORMANCE

20 MIN

DUTY CYCLE

up to
30-35 L/MIN
from 8-9 l/min

FLOW-RATE

version
AC-DC
available

VOLTAGE

EN.

The Piusi Suzzarablue is the best seller diaphragm pump in this market. Available in AC/DC version this self-priming pump can be used to transfer urea/ AdBlue® fluids.



SUZZARABLUE AC



SUZZARABLUE DC



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
PUMPS						
FO0203090	7	15,4	350X180X280	13,8X7,1X11		1
FO0203100	7	15,4	350X180X280	13,8X7,1X11		1
FO0204080	3,6	7,9	350X180X280	13,8X7,1X11		1
FO0204090	3,6	7,9	350X180X280	13,8X7,1X11		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

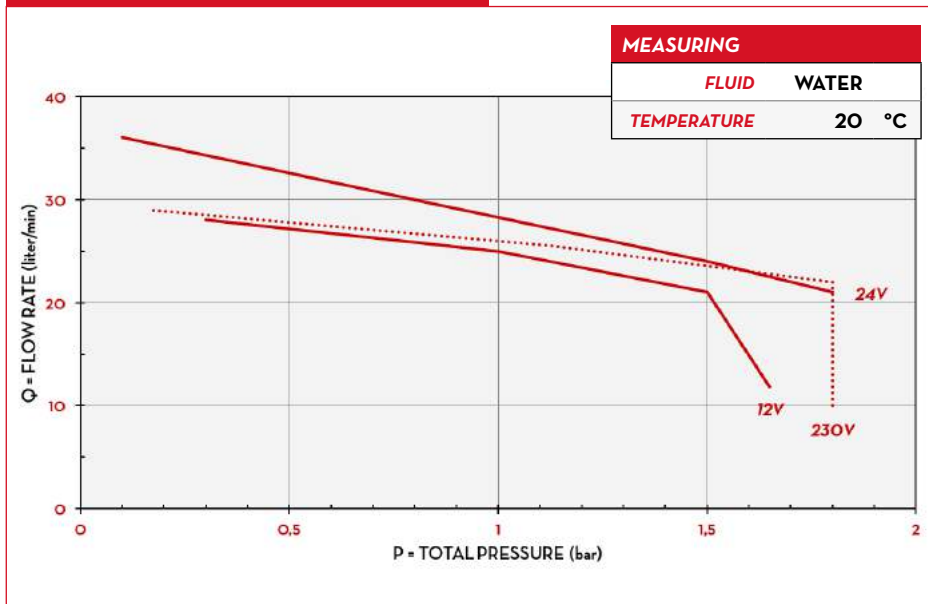

IN THE BOX

- SUZZARABLU PUMP
- INSTRUCTION MANUAL

DETAILS




ON / OFF SWITCH



ELECTRIC CABLE

DIMENSIONS

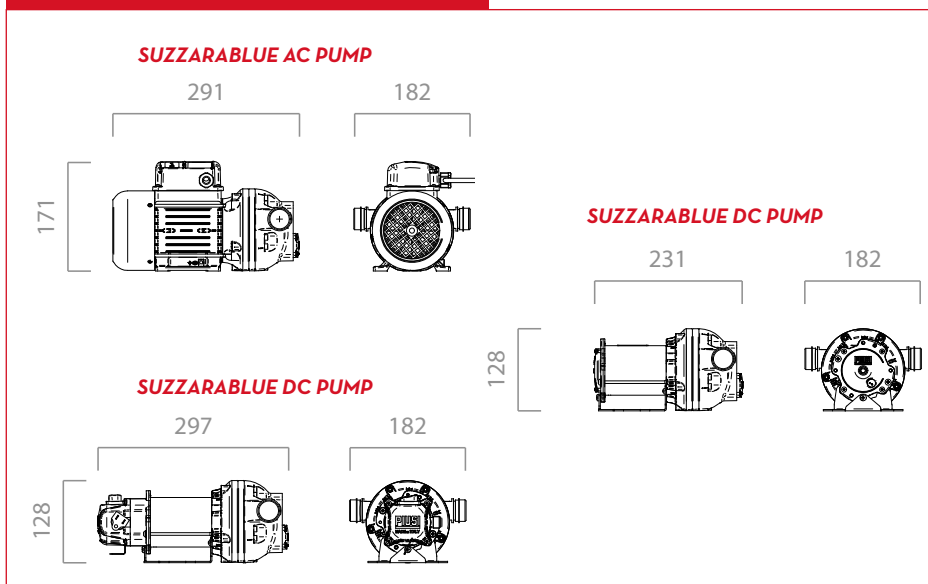

MATERIALS

- BODY: POLIPROPYLENE
- MEMBRANE: POLIPROPYLENE

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOR RATE		AC	DC	DUTY CICLE	ON/OFF SWITCH	CABLES	BYPASS	INTLET/ OUTLET
			L/MIN	GPM	VOLT	VOLT	MIN				
PUMPS											
FO0203090	SUZZARABLU AC PUMP 230/50	  	30 - 35	8 - 9	230/50	-	20	YES	YES	YES	HOSE TAIL 3/4"
FO0203100	SUZZARABLU AC PUMP 120/60	  	30 - 35	8 - 9	120/60	-	20	YES	YES	YES	HOSE TAIL 3/4"
FO0204080	SUZZARA BLUE DC PUMP 12V	  	30 - 35	8 - 9	-	12	20	YES	YES	YES	HOSE TAIL 3/4"
FO0204090	SUZZARABLU DC PUMP 24V	  	30 - 35	8 - 9	-	24	20	YES	YES	YES	HOSE TAIL 3/4"

SUZZARABLU AC / DC

PUMPS

47



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

PICO

FEATURES

- READY TO USE
- DRUM INSTALLATION
- TURBINE FLO-METER (K24 VERSION ONLY)
- WEATHER PROOF MATERIALS
- STURDY DESIGN

PERFORMANCE

 $\pm 1\%$

ACCURACY

up to
35 L/MIN
9 l/min

FLOW-RATE

version
AC-DC
available

VOLTAGE

EN.

The Piusi Pico is a dispensing unit suitable to transfer antifreeze and wind-scrubber, it includes a centrifugal pump ready to be fitted on any kind of drum.



PICO 12 K24 M



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
DISPENSERS						
FO0202020	4,8	10,6	360X360X180	14,2X14,2X7,1		1
FO0202060	4,8	10,6	360X360X180	14,2X14,2X7,1		1
FO0202100	4,8	10,6	360X360X180	14,2X14,2X7,1		1
FO0202000	4,5	9,9	360X360X180	14,2X14,2X7,1		1
FO0202040	4,5	9,9	360X360X180	14,2X14,2X7,1		1
FO0202080	4,5	9,9	360X360X180	14,2X14,2X7,1		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN

CHARTS

MEASURING

FLUID DIESEL

TEMPERATURE 18 °C

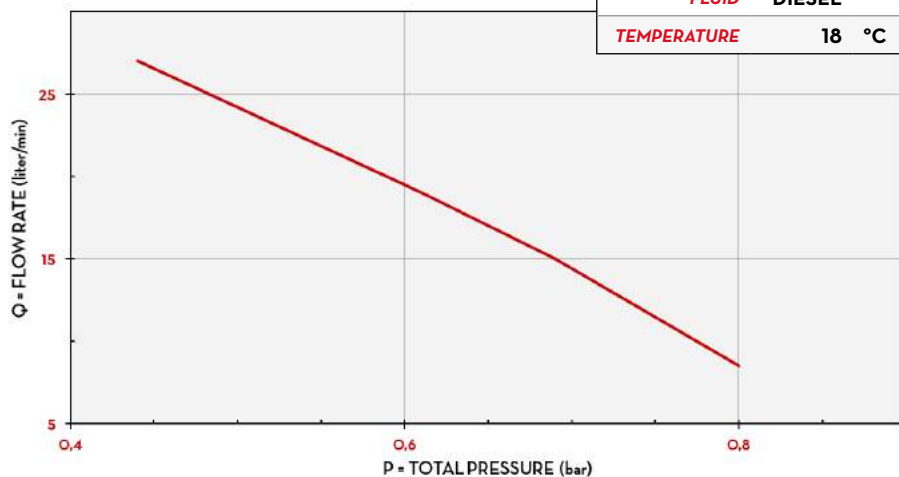

IN THE BOX



- PICO PUMP
- K24 METER (METER VERSION OLNY)
- INSTRUCTION MANUAL

DETAILS



ON / OFF SWITCH



ELECTRIC CABLE




MANUAL NOZZLES



K24 METER

DIMENSIONS

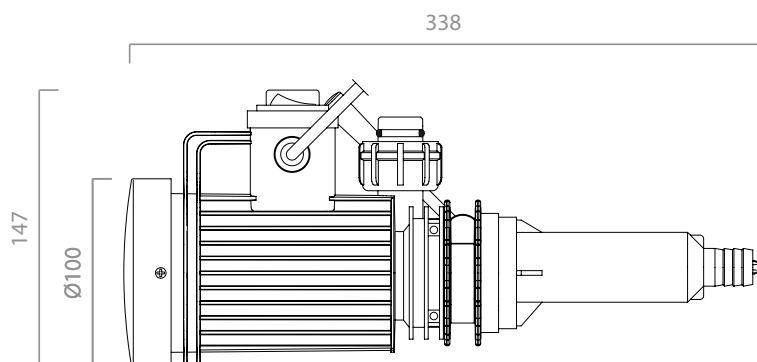

MATERIALS

- BODY: TECHNOPOLYMER
- TURBINES: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	METER	FLOR RATE		AC	DC	DUTY CICLE	ON/OFF SWITCH	CABLES	NOZZLE	INTLET/ OUTLET
				L/MIN	GPM	VOLT	VOLT					
DISPENSERS												
FOO202020	PICO230 K24 M	 	K24	35	9	230/50	-	-	YES	YES	MAN.	-
FOO202060	PICO12 K24	 	K24	30	8	-	12	30	YES	YES	MAN.	-
FOO202100	PICO24 K24 M	 	K24	30	8	-	24	30	YES	YES	MAN.	-
FOO202000	PICO230 M	 	-	35	8	230/50	-	-	YES	YES	MAN.	-
FOO202040	PICO12 M	 	-	30	8	-	12	30	YES	YES	MAN.	-
FOO202080	PICO24 M	 	-	30	8	-	24	30	YES	YES	MAN.	-

PICO

PUMPS

49



ELECTRIC PUMPS

ACCESSORIES


VISCOMAT DC

DRUM COVER	CODE	DESCRIPTION	60/12V	60/212V	60/124V	60/224V	FUSE ON THE CABLE
	R14437000	KIT CABLE 2M (12V/24V)	YES		YES		
	R10011000	KIT CABLE 2M (12V)		YES			YES
	R10040000	KIT CABLE 2M (24V)				YES	YES
	R14438000	KIT CABLE 4M (12V/24V)	YES		YES		
	R10041000	KIT CABLE 4M (12V)		YES			YES
	R10039000	KIT CABLE 4M (24V)				YES	YES

VISCOMAT VANE/GEAR/FLOWMAT

FLANGED ELBOW

DESCRIPTION	CODE	O-RING no.	SCREW M8X20 no.	SCREW M8X30 no.	NUT M8 no.
FLANGED ELBOW	R10824000	2	2	2	2

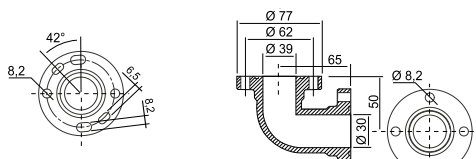

FLANGE
(not included)

SCREW

NUT


GRUB SCREW

O-RING

OVAL RING


DIMENSIONS

CONNECTIONS	CODE	DESCRIPTION	A (MM)	B (MM)	C (MM)
	R12229000	FLANGED TUBE 130	130	67	-
	R1222800A	FLANGED TUBE 300	300	67	-
	R13251000	FLANGED TUBE 205	205	54,7	44,3

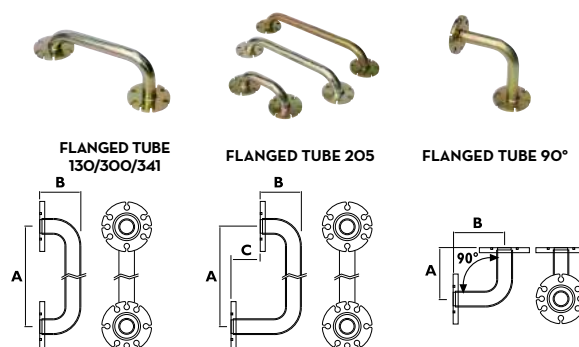

INLET / OUTLET

FLANGE	CODE	DESCRIPTION	B	C (MM)	H (MM)
	FO8832000	FLANGE	1" BSP	80	18

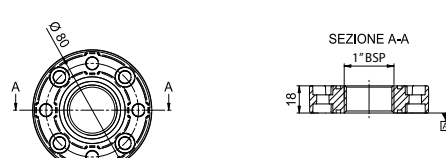


DESCRIPTION	CODE	FLANGE no.	O-RING no.	OVAL RING no.	SCREW M8X20 no.	SCREW M8X30 no.	NUT M8 no.	GRUB SCREW M8X50 no.
KIT FLANGE OVAL RING	R12904000	1	-	1	2	-	2	-
KIT FLANGE O-RING	R09180000	2	2	-	4	-	-	-
KIT FLANGE	R1106200A	1	1	-	2	-	-	-
KIT FLANGE WITH NUT	R12906000	1	-	-	-	-	2	-
KIT FLANGE TO CONNECT METER	O09779000	1	2	-	-	-	2	2
FLANGE	FO8832000	1	-	-	-	-	-	-
OVAL RING	R08985000	-	-	1	-	-	-	-
O-RING	R08417000	-	2	-	-	-	-	-
SCREW M8X20	R08812000	-	-	-	10	-	-	-
SCREW M8X30	R08043000	-	-	-	-	10	-	-
KIT FLANGE TO CONNECT FILTER	R19271000	1	1	1	-	2	2	-



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

MA 130

FEATURES

- IN/OUT SWAPPABLE
- LONG LIFE DIAPHRAGM
- BUILT-IN INTEGRATED DIFFUSER
- SUITABLE FOR IMMERSED INSTALLATION
- HEAVY DUTY
- EXPLOSION PROOF (ex zone 2)

PERFORMANCE

up to
50 L/MIN

FLOW-RATE

max
5 M
capacity

SELF-PRIMING

max
7 BAR
air supply

PRESSURE

max
4 MM
Ø

PASSING SOLID

EN.

The Piusi MA130 is a pneumatic diaphragm pump suitable for transferring high viscosity fluids and waste oils. Thanks to its small size this pumps is easy to fit.



MA 130



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0208A00	4	8,8	220X310X320	8,7X12,2X12,6		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

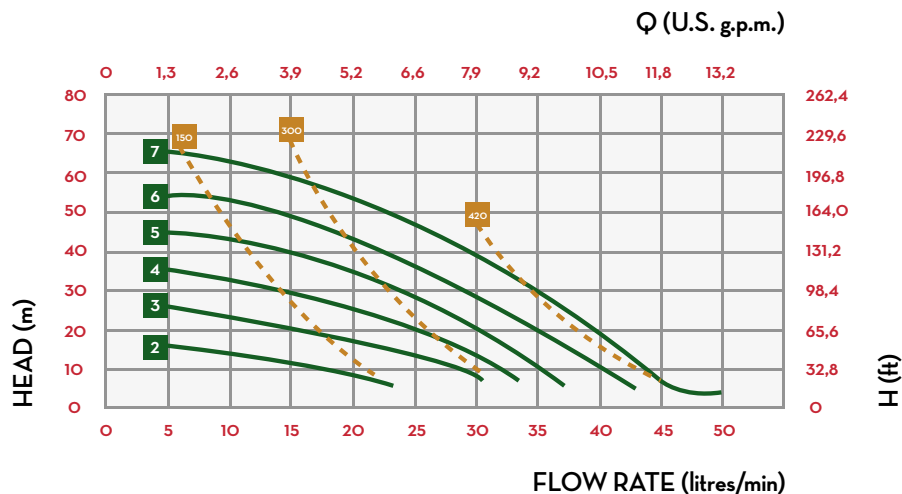

IN THE BOX

- MA PUMP
- INSTRUCTION MANUAL

DETAILS



HEAVY DUTY MATERIALS



AIR CONNECTION



EASY TO FIT




TECHNOPOLYMER BODY

MATERIALS

- BODY: TECHNOPOLYMER
- FITTINGS: ALUMINIUM
- DIAPHRAGMS: TECHNOPOLYMER

DIMENSIONS

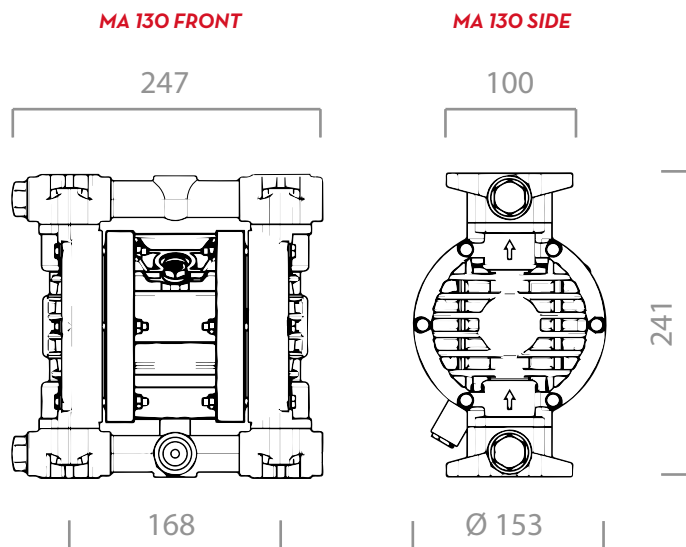

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	PUMP BODY	IN / OUT	FLOW RATE	MEMBRANE TYPE	DIAPHRAGM	BALLS	BALL SEATS*	O-RING*	INTAKE / DELIVERY CONNECTION	AIR CONNECTION	MAX SELF-PRIMING CAPACITY	MAX HEAD**	MAX AIR SUPPLY PRESSURE	MAX Ø OF PASSING SOLID
					L/MIN								M	M	BAR	MM
FOO208A00	PIUSI MA 130	O D	ALUMINIUM	1/2" G	50	SINGLE	NBR	NBR	ALUMINIUM	NBR	G 1/2" F	G 3/8" F	5	70	7	4

(*) ON REQUEST WE CAN PROVIDE MEMBRANES, BALLS, BALL SEATS AND O-RING IN DIFFERENT MATERIALS. (**) THE VALUE DEPENDS ON THE CONFIGURATION OF THE PUMP

MA 130

PUMPS

53



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

MA 140

FEATURES

- IN/OUT SWAPPABLE
- BUILT-IN INTEGRATED DIFFUSER
- SUITABLE FOR IMMERSED INSTALLATION
- HEAVY DUTY
- EXPLOSION PROOF (ex zone 2)
- EASY TO FIT

PERFORMANCE

up to
100 L/MIN

FLOW-RATE

max
6 M
capacity

SELF-PRIMING

max
7 BAR
air supply

PRESSURE

max
4 MM
Ø

PASSING SOLID

EN.

The Piusi MA140 is a long life pneumatic diaphragm pump suitable for transferring high viscosity fluids and waste oils. The small size of this pump allows a wide range of possible installations.



MA 140



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO208P10	5	11	240X380X350	9,4X15X13,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

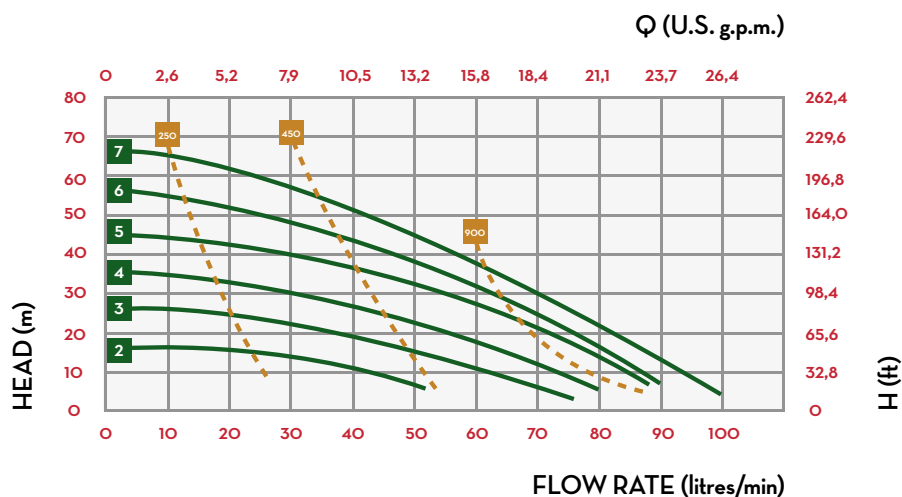

IN THE BOX

- MA PUMP
- INSTRUCTION MANUAL

DETAILS



HEAVY DUTY MATERIALS



AIR CONNECTION



STURDY DESIGN




TECHNOPOLYMER BODY

MATERIALS

- BODY: TECHNOPOLYMER
- FITTINGS: ALUMINIUM
- DIAPHRAGMS: TECHNOPOLYMER

DIMENSIONS

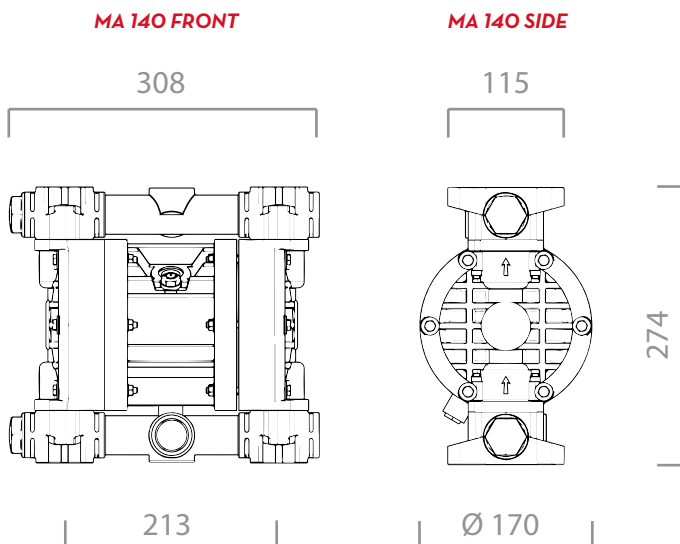

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	PUMP BODY	IN / OUT	FLOW RATE	MEMBRANE TYPE	DIAPHRAGM	BALLS	BALL SEATS*	O-RING*	INTAKE / DELIVERY CONNECTION	AIR CONNECTION	MAX SELF-PRIMING CAPACITY	MAX HEAD**	MAX AIR SUPPLY PRESSURE	MAX Ø OF PASSING SOLID
					L/MIN								M	M	BAR	MM
FOO208P10	PIUSI MA 140	O D	POLYPROPYLENE	1" G	100	SINGLE	NBR	NBR	POLYPROPYLENE	NBR	G 1" F	G 3/8" F	6	70	7	4

(*) ON REQUEST WE CAN PROVIDE MEMBRANES, BALLS, BALL SEATS AND O-RING IN DIFFERENT MATERIALS. (**) THE VALUE DEPENDS ON THE CONFIGURATION OF THE PUMP

MA 140

PUMPS

55



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

MA 180

FEATURES

- IN/OUT SWAPPABLE
- LONG LIFE DIAPHRAGM
- BUILT-IN INTEGRATED DIFFUSER
- SUITABLE FOR IMMERSED INSTALLATION
- EXPLOSION PROOF (ex zone 2)
- MULTI-PURPOSE PUMP

PERFORMANCE

up to
150 L/MIN

FLOW-RATE

max
5 M
capacity

SELF-PRIMING

max
7 BAR
air supply

PRESSURE

max
4 MM
Ø

PASSING SOLID

EN.

The Piusi MA180 is a pneumatic diaphragm pump suitable for an heavy duty usage. Thanks to its characteristics this multi-purpose pump allows a wide range of possible installations.



MA 180



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0208A10	8,2	18,1	270X390X400	10,6X15,4X15,7		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN


CHARTS

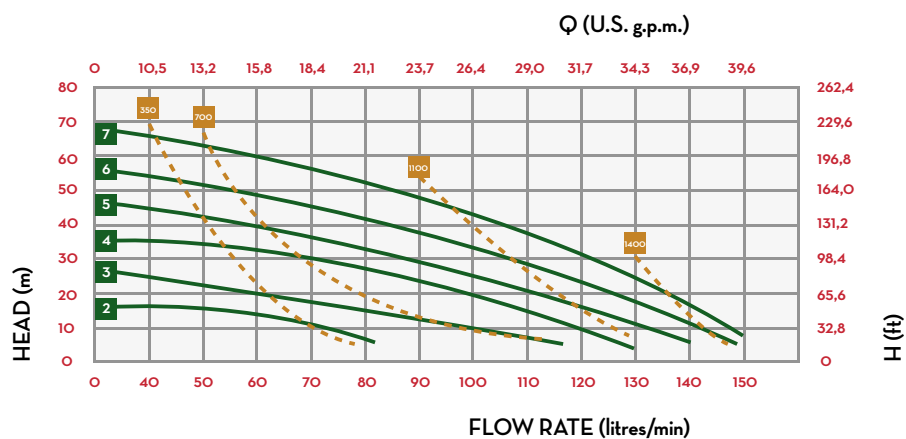

IN THE BOX

- MA PUMP
- INSTRUCTION MANUAL

DIMENSIONS

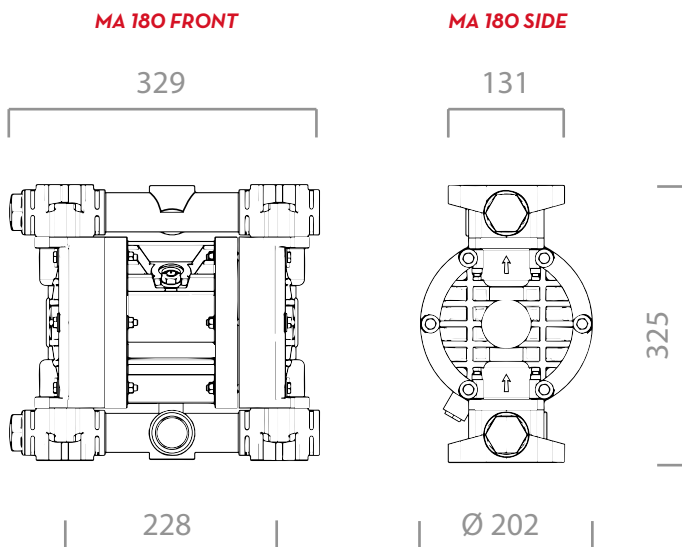

DETAILS



HEAVY DUTY MATERIALS



AIR CONNECTION



STURDY DESIGN



TECHNOPOLYMER BODY

MATERIALS

- BODY: TECHNOPOLYMER
- FITTINGS: ALUMINIUM
- DIAPHRAGMS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	PUMP BODY	IN / OUT	FLOW RATE	MEMBRANE TYPE	DIAPHRAGM	BALLS	BALL SEATS*	O-RING*	INTAKE / DELIVERY CONNECTION	AIR CONNECTION	MAX SELF-PRIMING CAPACITY	MAX HEAD**	MAX AIR SUPPLY PRESSURE	MAX Ø OF PASSING SOLID
					L/MIN								M	M	BAR	MM
FO0208A10	PIUSI MA 180		ALUMINIUM	1" G	150	SINGLE	NBR	NBR	PPS-V	NBR	G 1" F	G 3/8" F	5	70	7	4

(*) ON REQUEST WE CAN PROVIDE MEMBRANES, BALLS, BALL SEATS AND O-RING IN DIFFERENT MATERIALS. (**) THE VALUE DEPENDS ON THE CONFIGURATION OF THE PUMP

MA 180

PUMPS

57



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

MA 190

FEATURES

- IN/OUT SWAPPABLE
- LONG LIFE DIAPHRAGM
- BUILT-IN INTEGRATED DIFFUSER
- SUITABLE FOR IMMERSED INSTALLATION
- HEAVY DUTY
- MULTI-PURPOSE PUMP

PERFORMANCE

up to
220 L/MIN

FLOW-RATE

max
6 M
capacity

SELF-PRIMING

max
7 BAR
air supply

PRESSURE

max
4 MM
Ø

PASSING SOLID

EN.

The Piusi MA190 is a pneumatic multi purpose diaphragm pump that allows a wide range of possible installations. Thanks to its characteristics it is suitable for an heavy duty usage.



MA 190



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO208A20	16	35,3	290X470X460	11,4X18,5X18,1		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

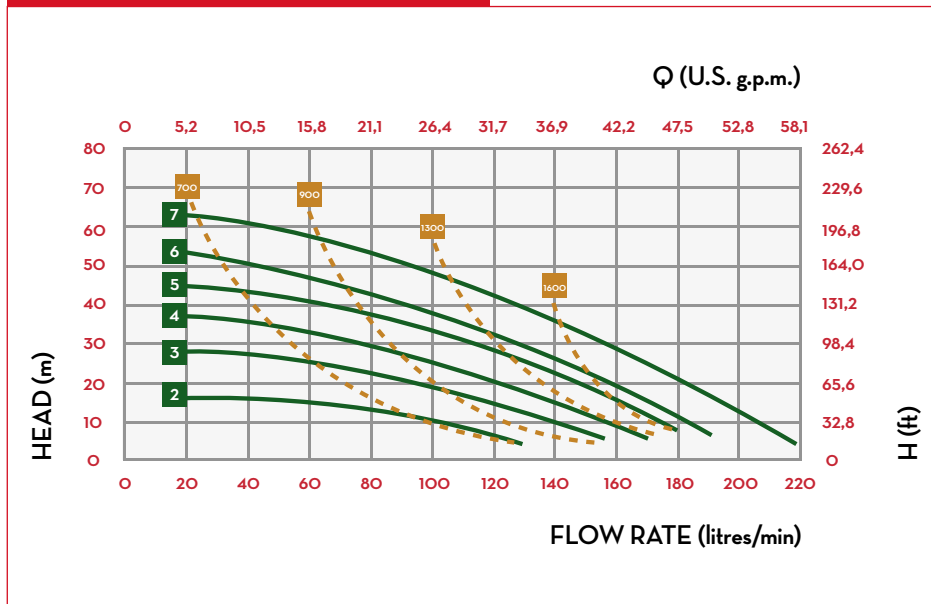

IN THE BOX

- MA PUMP
- INSTRUCTION MANUAL

DETAILS



HEAVY DUTY MATERIALS



AIR CONNECTION



STURDY DESIGN




TECHNOPOLYMER BODY

MATERIALS

- BODY: TECHNOPOLYMER
- FITTINGS: ALUMINIUM
- DIAPHRAGMS: TECHNOPOLYMER

DIMENSIONS

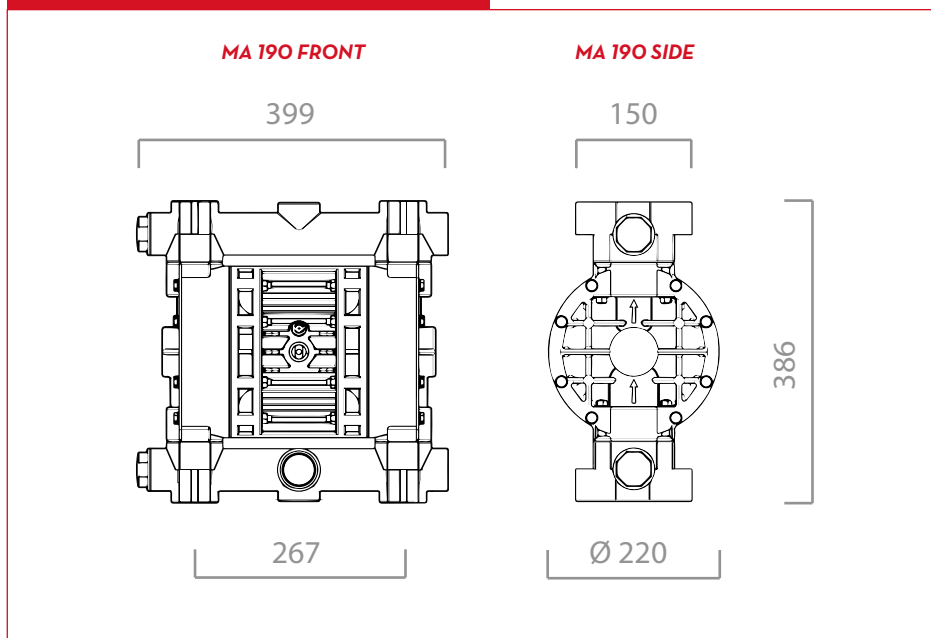

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	PUMP BODY	IN / OUT	FLOW RATE	MEMBRANE TYPE	DIAPHRAGM	BALLS	BALL SEATS*	O-RING*	INTAKE / DELIVERY CONNECTION	AIR CONNECTION	MAX SELF-PRIMING CAPACITY	MAX HEAD**	MAX AIR SUPPLY PRESSURE	MAX Ø OF PASSING SOLID
					L/MIN								M	M	BAR	MM
FO0208A20	PIUSI MA 190		ALUMINIUM	1" 1/4" G	220	SINGLE	NBR	NBR	PPS-V	NBR	G 1" 1/4" F	G 1/2" F	6	70	7	4

(*) ON REQUEST WE CAN PROVIDE MEMBRANES, BALLS, BALL SEATS AND O-RING IN DIFFERENT MATERIALS. (**) THE VALUE DEPENDS ON THE CONFIGURATION OF THE PUMP

MA 190

PUMPS

59



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

HAND PUMP

FEATURES

- OPTIMIZED SUCTION CAPACITY
- STURDY CONNECTOR
- HEAVY DUTY LEVER
- FLUENT REVOLUTION
- HIGH EFFICIENCY
- ADJUSTABLE SUCTION PIPE
- DURABILITY
- SELECTED MATERIALS
- 100% TESTED

PERFORMANCE

up to
38 L
per 100 revolutions
CAPACITY

available with
HOSE LENGHT
3 meters
DELIVERY HOSE

EN.

The Piusi HAND PUMP is a rotary vane pump suitable for transferring low viscosity oils and diesel. Entirely designed, manufactured and certified in Italy this sturdy pump guarantees a professional performance.



HAND PUMP FOR OIL-DIESEL



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX	✈	🚚
FO0332500	2,1	4,6	350X170X140		1	50	100



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

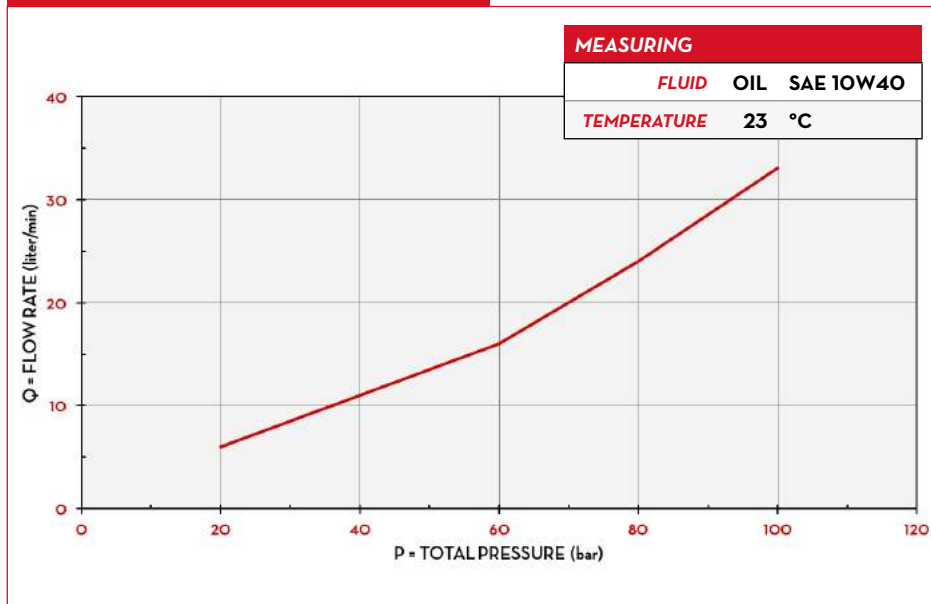

IN THE BOX

- PIUSI HAND PUMP
- SPOUT
- INSTRUCTION MANUAL

DETAILS



HIGH QUALITY MATERIALS




NON-SLIP HANDLE



SUCTION PIPE

DIMENSIONS

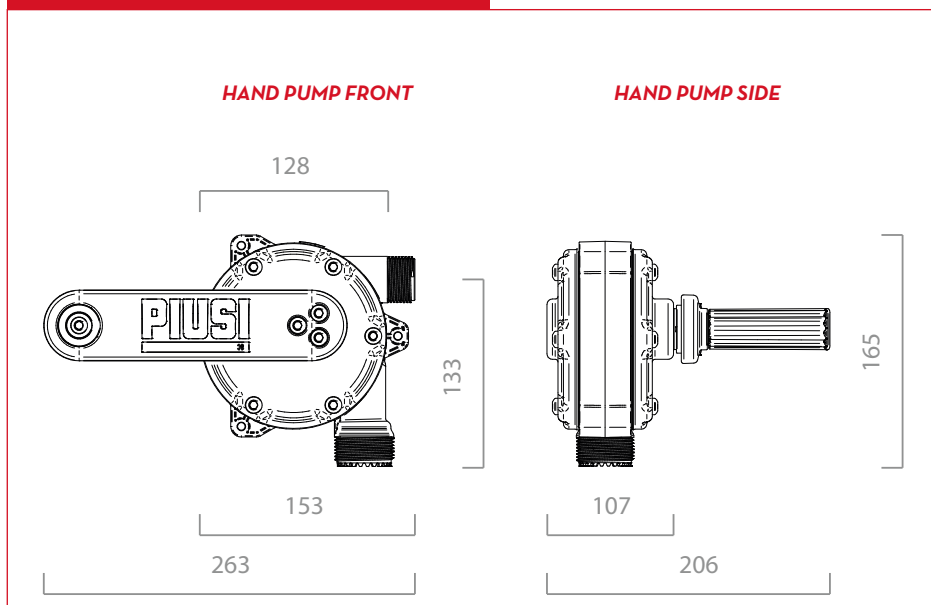

MATERIALS

- BODY: STAINLESS STEEL, TECHNOPOLYMER
- ROTOR: TECHNOPOLYMER
- VANES: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	CAPACITY PER 100 REVOLUTIONS		DRUM CONNECTOR	SUCTION TUBE	"S" SPOUT AND HOSE TAIL	DELIVERY HOSE LENGHT
			L	USG				M
FO0332500	PIUSI HAND PUMP 2" BSP		38	10	2" BSP	YES	YES	-

HAND PUMP

PUMPS

61



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

BARREL PUMP

FEATURES

- **READY / EASY TO USE**
- **MOBILE**
- **HEAVY DUTY**
- **SUITABLE FOR ANY OPERATING CONDITIONS**

PERFORMANCE

up to

16

kg

TANK CAPACITY

adaptable for

OIL-GREASE

FLUIDS

EN.

The Piusi Bucket Pump is a handy manual pump suitable for dispensing grease and oil in limited usages.



BUCKET PUMP



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
PIUSI BARREL PUMPS						
FOO33215A	14		240X570X560			1
FOO33216A	14		240X570X560			1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

DIMENSIONS

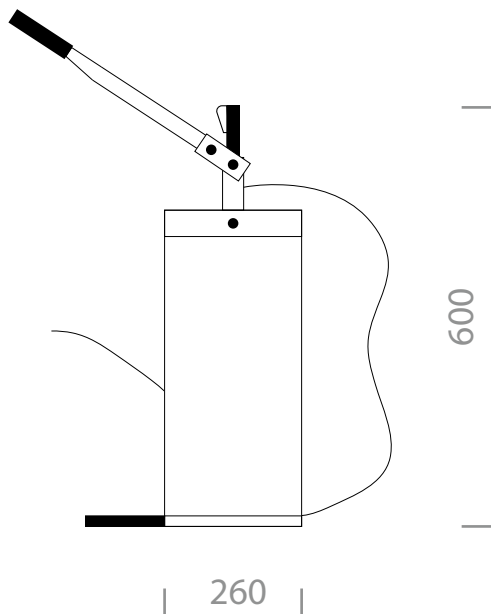

IN THE BOX

- BUCKET PUMP
- DELIVERY HOSE


DETAILS



NON-SLIP HANDLE



SPOUT FOR GREASE



SPOUT FOR OIL

MATERIALS

- BODY: SINTERED STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	CAPACITY KG
PIUSI BARREL PUMPS			
FO033215A	GREASE PUMP		16
FO033216A	OIL PUMP		16

BARREL PUMP



HAND PUMPS

ACCESSORIES

HAND PUMP

DRUM CONNECTOR

CODE	DESCRIPTION	BSP
------	-------------	-----

F19157000	DRUM CONNECTOR	2"
-----------	----------------	----



DRUM ADAPTER


CODE	DESCRIPTION	BSP
------	-------------	-----

DRUM ADAPTER	R1512800A	F: 2" M: 70X6
--------------	-----------	---------------

DRUM ADAPTER	F15236000	F: 2" M: 56X4
--------------	-----------	---------------





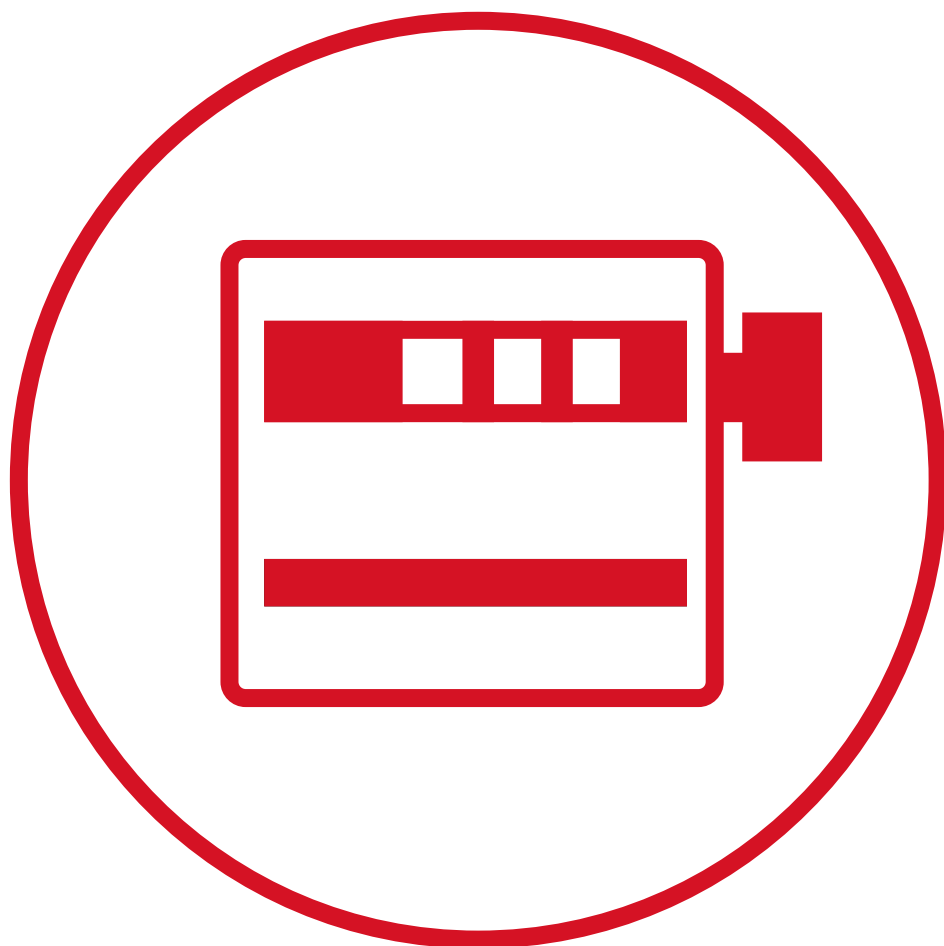

METERS

PIUSI
PRODUCT
PLUS

ELECTRONIC METER



**REED SWITCH
TECHNOLOGY**

**LONG LIFE
BATTERY**

WEATHER PROOF

COMPACT DESIGN

**SUITABLE FOR
INDUSTRIAL
APPLICATION**

MECHANICAL METER



**NO BATTERY
NEEDED**

**MAINTENANCE
FREE**

**IDEAL FOR
STURDY
APPLICATION**

LONG LASTING





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K400 METER-PULSER

FEATURES

- READY TO USE
- EASY TO CALIBRATE
- DOUBLE TOTALIZER
- ELECTRONIC RESET FUNCTION
- HIGH ACCURACY
- LOW BATTERY CONSUMPTION
- RUBBER PROTECTION
- ADJUSTABLE UMA

PERFORMANCE

up to
30 L/MIN
(up to 7,8 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

70 BAR

PRESSURE

2 - 2000

cSt

VISCOSITY

EN.

The Piusi K400 is an electric oval gear meter suitable for monitoring the delivery of a wide range of viscosity oils. The meter is equipped with a digital display and it is also available in pulser version.



K400



K400 pulser



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0484000	0,5	1,1	298X198X113	11,7X7,8X4,4		12
FO0440200	0,5	1,1	300X160X110	11,8X6,3X4,3		8



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

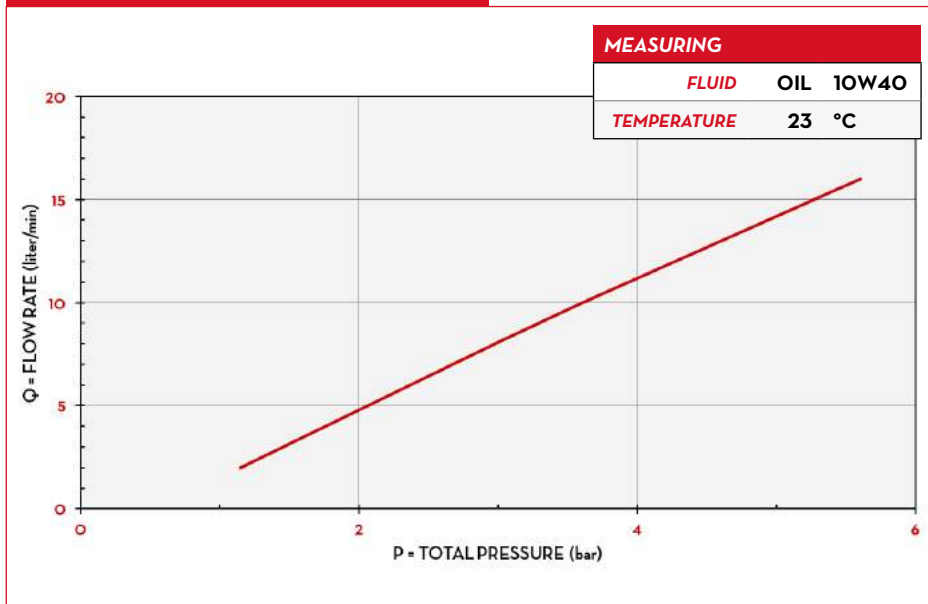

IN THE BOX

- K400 METER
- INSTRUCTION MANUAL

DETAILS



RESET BUTTON



ALUMINIUM BODY




OVAL GEAR



2 AAA BATTERIES INCLUDED

DIMENSIONS

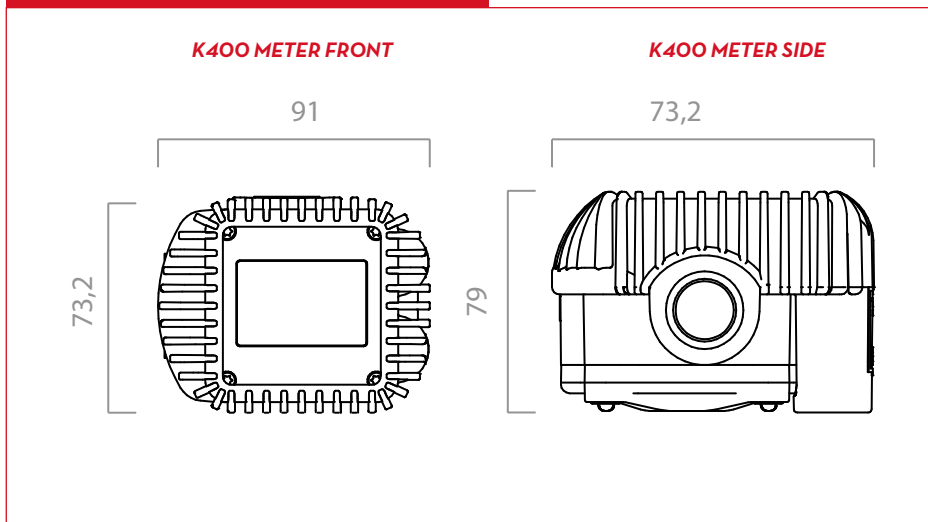

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		PRESSURE		BATTERIES INCLUDED	INTLET	OUTLET
			L/MIN	GPM	BAR	PSI			
FOO484000	K400 BSP	A D O	1 - 30	0,26 - 7,8	70	994	YES	1/2" BSP	1/2" BSP
FOO440200	K400 PULSER	A D O	1 - 30	0,26 - 7,8	70	994	NO	1/2" BSP	1/2" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PRINT

K400

METERS

71



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

NEXT/2

FEATURES

- SELECTABLE UMA
- EASY BATTERIES MAINTENANCE
- STANDARD BATTERY
- SHOCK ABSORBER PROTECTION
- ON-SITE CALIBRATION

PERFORMANCE

up to
60 L/MIN
(up to 15,8 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

70 BAR

PRESSURE

0,2 %

REPEATABILITY

EN.

The Piusi NEXT/2 meter is an oval gear suitable for the delivery of low, medium and high viscosity oils. Its particular size allows the meter to count at high flow rates.



NEXT/2



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO486150	0,6	1,3	115X160X135	4,5X6,3X5,3		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

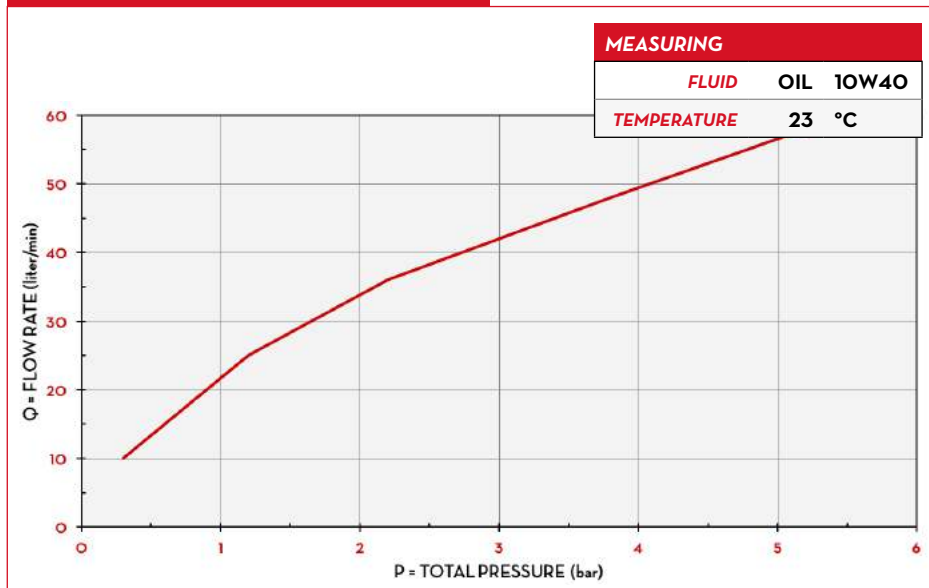

IN THE BOX

- NEXT/2 METER
- INSTRUCTION MANUAL

DETAILS



RESET BUTTON




2 AAA BATTERIES INCLUDED



OVAL GEAR

DIMENSIONS

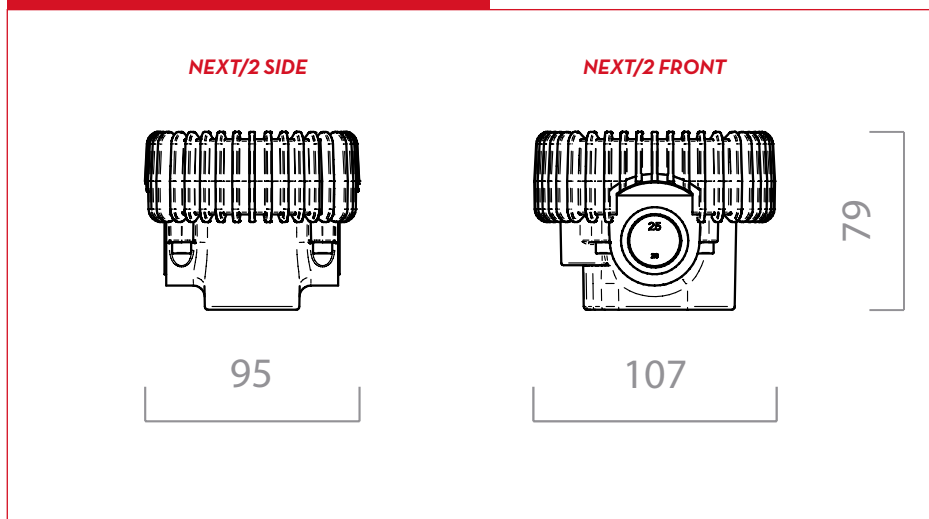

MATERIALS

- BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		PRESSURE		BATTERY INCLUDED	INTLET	OUTLET
			L/MIN	GPM	BAR	PSI			
FOO486150	NEXT/2		6 - 60	1,58 - 158	70	994	AAA n°2 2X1,5 V	3/4" BSP	3/4" BSP

NEXT/2

METERS

73



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K600/3 METER-PULSER

FEATURES

- ADJUSTABLE FLANGES
- INSTANTANEOUS
- STANDARD BATTERY
- EXTREMELY ACCURATE
- INDUSTRIAL APPLICATION
- SUITABLE FOR MOBILE INSTALLATIONS
- LOW ENERGY CONSUMPTIONS

PERFORMANCE

up to
100 L/MIN
(up to 26,4 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

30 / 70 BAR

PRESSURE

0,2 %

REPEATABILITY

EN.

The Piusi K600/3 is an oval gear meter suitable for monitoring the delivery of low, medium and high viscosity oils. The meter is equipped with an integrated filter and it is available also in pulser version.



K600/3



K600/3 pulser



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
METERS						
FOO496A20	1,6	3,5	200X120X140	7,9X4,7X5,5		1
FOO496A00	1,6	3,5	200X120X140	7,9X4,7X5,5		1
PULSER						
FOO472A20	2	4,4	200X120X140	7,9X4,7X5,5		1
FOO472A00	2,6	5,7	200X120X140	7,9X4,7X5,5		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

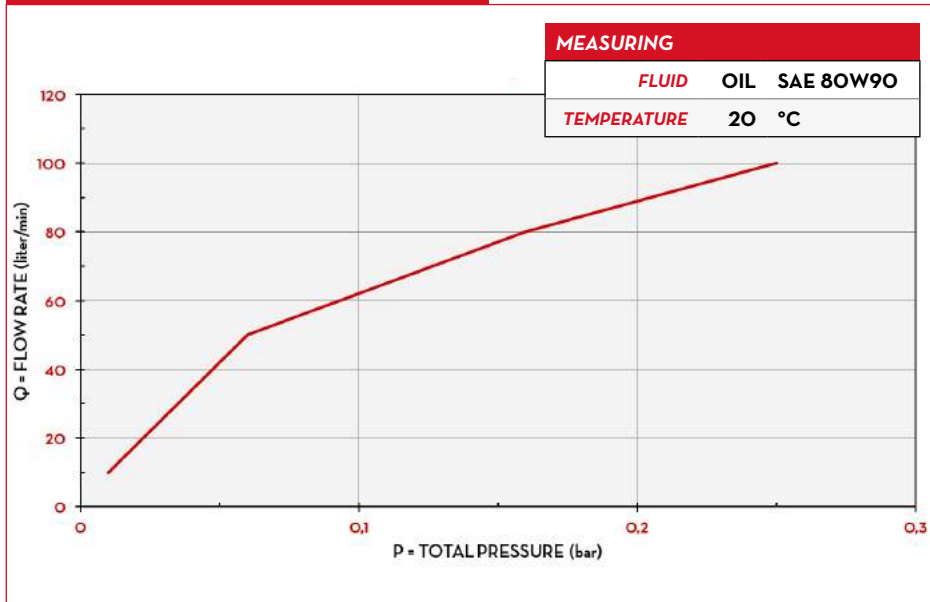

IN THE BOX

- K600/3 METER
- INSTRUCTION MANUAL

DETAILS



RESET/CALIBRATE BUTTON



ALUMINIUM BODY




OVAL GEAR

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

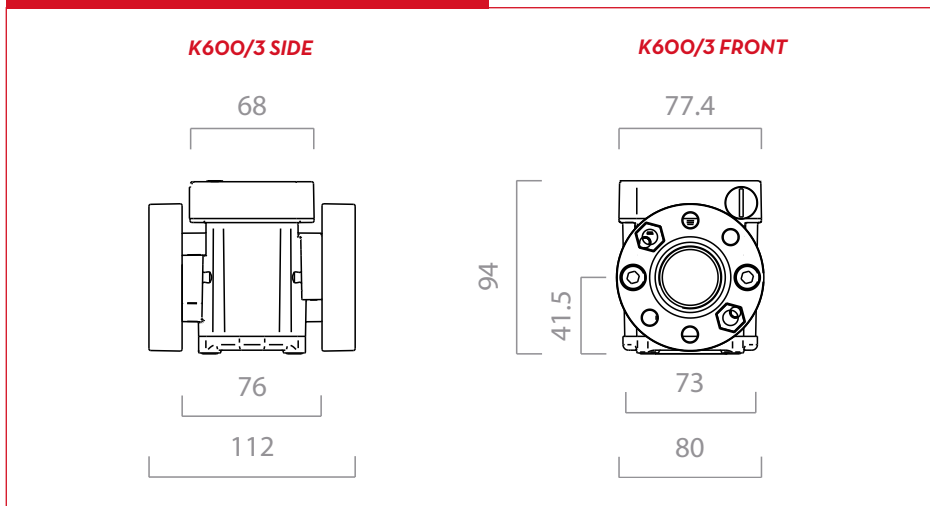

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		PRESSURE		BATTERY INCLUDED NO. 2 2X1,5V	FLANGE	INLET OUTLET	INLET FILTER	
			L/MIN	GPM	BAR	PSI					
METERS											
FOO496A20	K600/3 OIL	A O	6 - 60	1,58 - 1,58	70	994	YES	YES	3/4" BSP	YES	
FOO496A00	K600/3 DIESEL	A D O	10 - 100	2,64 - 26,4	30	426	YES	YES	1" BSP	YES	
PULSER											
FOO472A20	K600/2-3 3/4" OIL	A O	6 - 60	1,58 - 1,58	70	994	NO	YES	3/4" BSP	YES	
FOO472A00	K600/3 1" DIESEL	A D O	10 - 100	2,64 - 26,4	30	426	NO	YES	1" BSP	YES	

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PRINT

K600/3

METERS

75



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K600 B/3 METER-PULSER

FEATURES

- EASY-TO-READ BIG DISPLAY
- SWIVEL DISPLAY
- STANDARD BATTERY
- PULSE-OUT VERSION AVAILABLE
- ADJUSTABLE FLANGES

PERFORMANCE

up to
100 L/MIN
(up to 26,4 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

less than
0,5 BAR

LOSS OF PRESSURE

0,2 %

REPEATABILITY

EN.

The Piusi K600 B/3 is an oval gear meter suitable for monitoring the delivery of low, medium and high viscosity oils. This special version includes a large built-in digital display.



K600 B/3



K600 B/3 PULSE-OUT



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
METERS						
FOO491000	2	4,4	200X120X140	7,9X4,7X5,5		1
FOO491010	2	4,4	200X120X140	7,9X4,7X5,5		1
PULSE OUT METER						
FOO492000	2	4,4	200X120X140	7,9X4,7X5,5		1
FOO492010	2	4,4	200X120X140	7,9X4,7X5,5		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

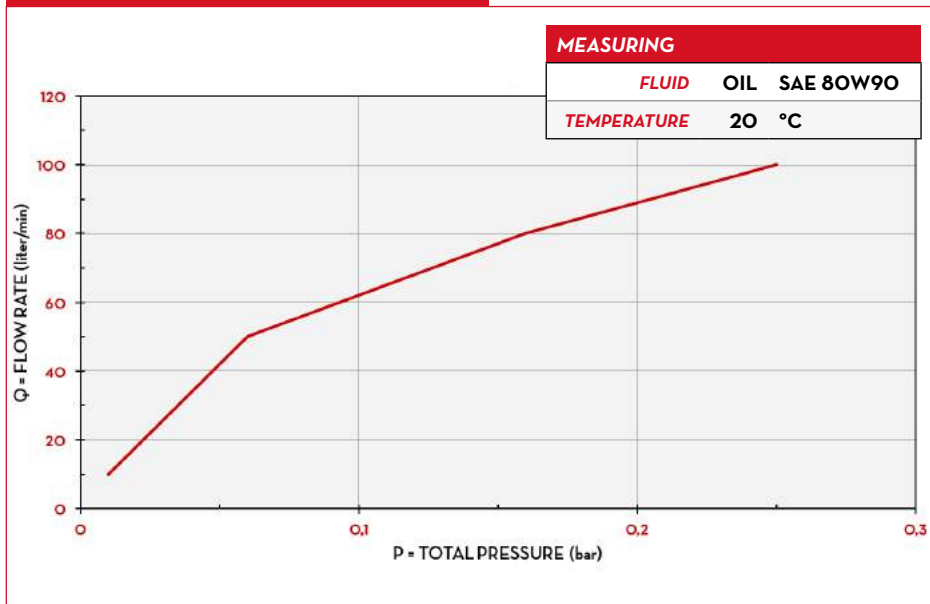

IN THE BOX

- K600 B/3 METER
- INSTRUCTION MANUAL

DETAILS



RESET BUTTON



OVAL GEAR




BIG DISPLAY

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

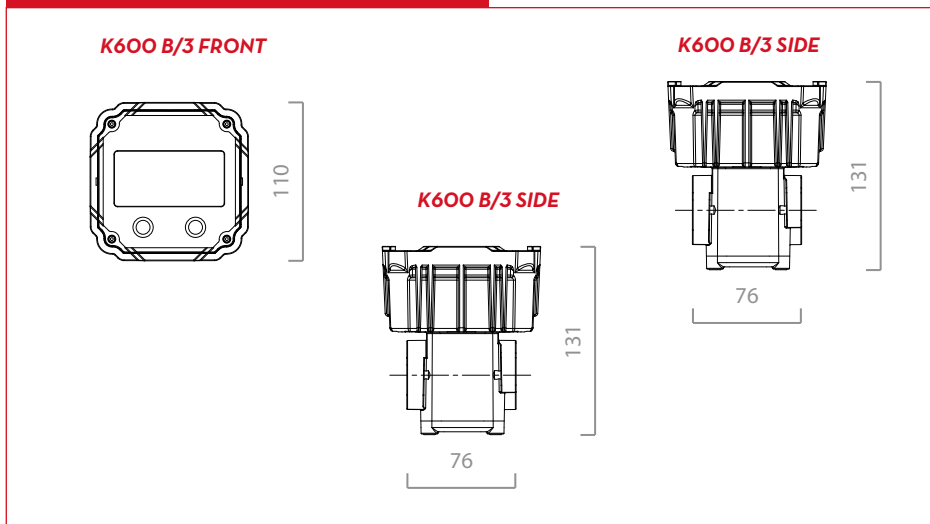

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		PRESSURE		BATTERY INCLUDED NO. 2 2X1,5V	FLANGE	INLET OUTLET	INLET FILTER
			L/MIN	GPM	BAR	PSI				
METERS										
FOO491000	K600 B/3		10 - 100	2,64 - 26,4	30	426	YES	YES	1" BSP	YES
FOO491010	K600 B/3		6 - 60	1,58 - 1,58	70	994	YES	YES	3/4" BSP	YES
PULSE OUT METER										
FOO492000	K600 B/3 WITH PULSE-OUT		10 - 100	2,64 - 26,4	30	426	YES	YES	1" BSP	YES
FOO492010	K600 B/3 WITH PULSE-OUT		6 - 60	1,58 - 1,58	70	994	YES	YES	3/4" BSP	YES

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K600 B/3

METERS

77



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K600/4 METER-PULSER

FEATURES

- ADJUSTABLE FLANGES
- INSTANTANEOUS FLOW
- STANDARD BATTERY
- EXTREMELY ACCURATE
- INDUSTRIAL APPLICATION
- SUITABLE FOR MOBILE INSTALLATIONS
- LOW ENERGY CONSUMPTION

PERFORMANCE

up to
150 L/MIN
(up to 39 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

20 BAR

PRESSURE

0,2 %

REPEATABILITY

EN.


The Piusi K600/4 is an oval gear meter suitable for monitoring the delivery of low and medium viscosity oils. Its 4 couples of gears allows to reach high flow rates.



K600/4



K600/4 pulser

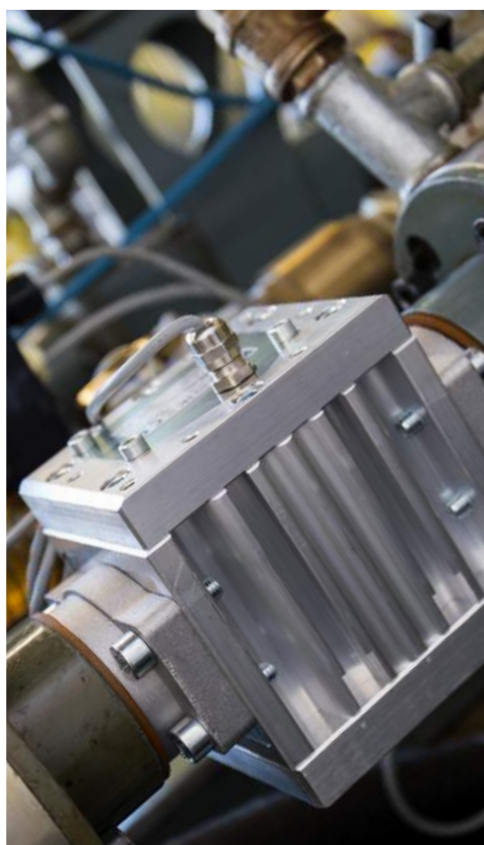

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
00049700A	3,2	7	200X120X140	7,9X4,7X5,5		1
000473000	3,2	7	200X120X140	7,9X4,7X5,5		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

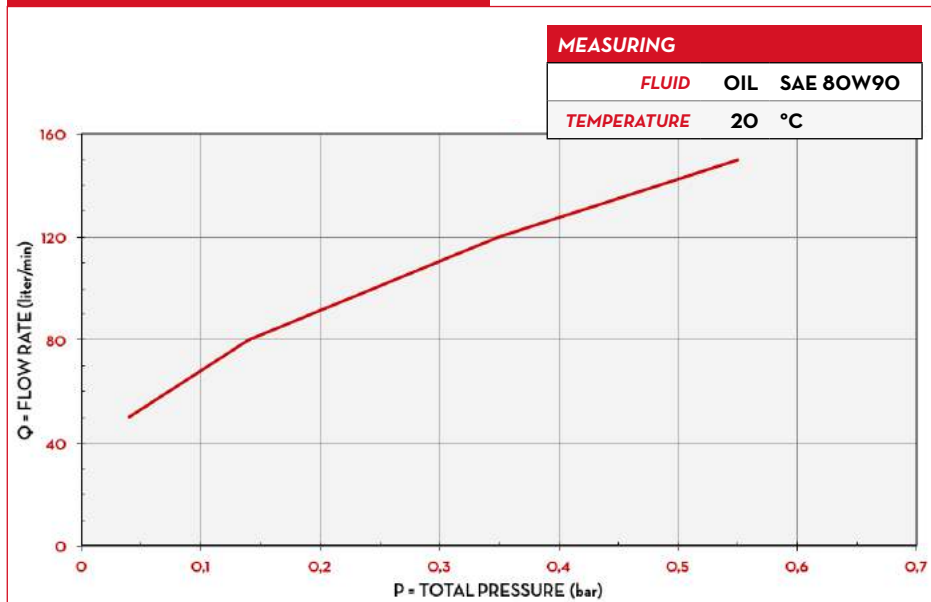

IN THE BOX

- K600/4 METER
- INSTRUCTION MANUAL

DETAILS



RESET/CALIBRATE BUTTON



ALUMINIUM BODY




OVAL GEAR

MATERIALS

- BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

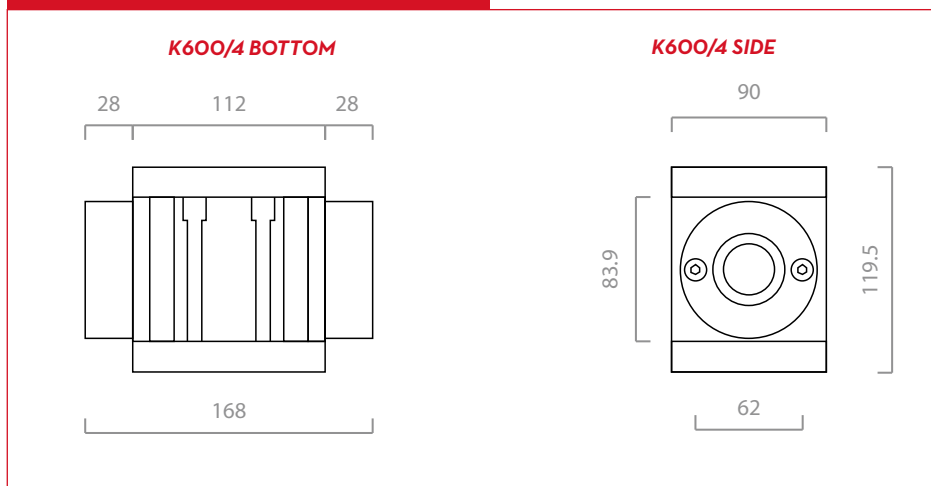

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		PRESSURE		BATTERY INCLUDED NO. 2 2X1,5V	FLANGE	INLET OUTLET	INLET FILTER
			L/MIN	GPM	BAR	PSI				
00049700A	K600/4		15 - 150	3,9 - 39	20	284	YES	YES	1 1/2" BSP	YES
000473000	K600/4 PULSER		15 - 150	3,9 - 39	20	300	NO	YES	1 1/2" NPT	YES

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K600/4

METERS

79



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K200 METER-PULSER

FEATURES

- LOW FLOW RATE OPERATION
- CONSUMPTION MONITORING
- SMALL SIZE
- INLET FILTER
- DOSAGE SYSTEM
- HIGH PRESSURE RESISTANCE
- CALIBRATE

PERFORMANCE

up to

2,8 L/MIN

(up to 0,66 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

less than

0,5 BAR

LOSS OF PRESSURE

0,2 %

REPEATABILITY

EN.

The Piusi K200 meter is an oval gear meter suitable for measuring diesel, oil and grease. Its low flow rate count makes it also applicable to measure the fuel consumption in a system.

**K200 METER****K200 PULSER****K200 HP PULSER**

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
METERS						
FOO43012A	0,6	1,3	130X65X108	5,1X2,6X4,3		1
FOO43011A	0,5	1,1	130X65X108	5,1X2,6X4,3		1
PULSER						
OOO452030	0,6	1,3	130X65X108	5,1X2,6X4,3		1
OOO452000	0,5	1,1	130X65X108	5,1X2,6X4,3		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN


CHARTS

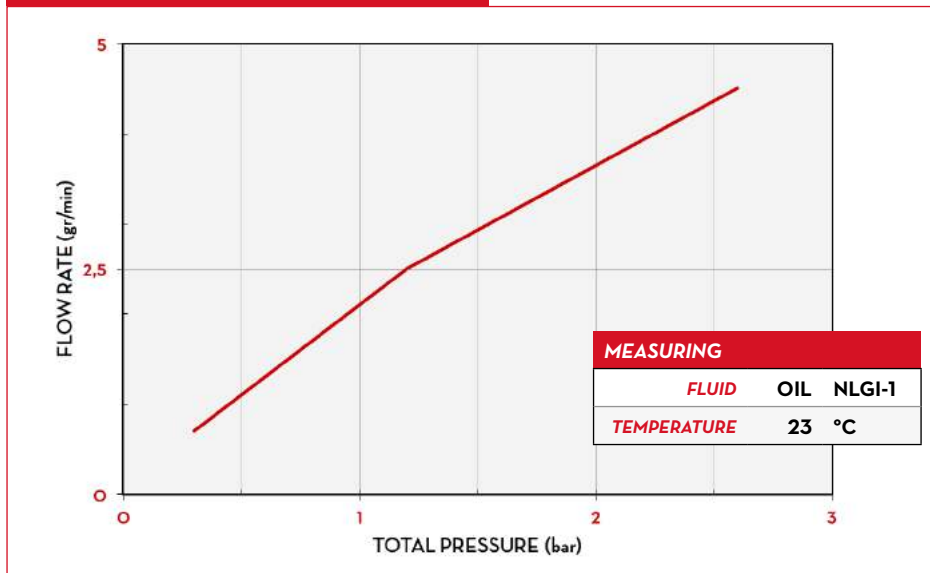

IN THE BOX

- K200 METER
- INSTRUCTION MANUAL

DIMENSIONS

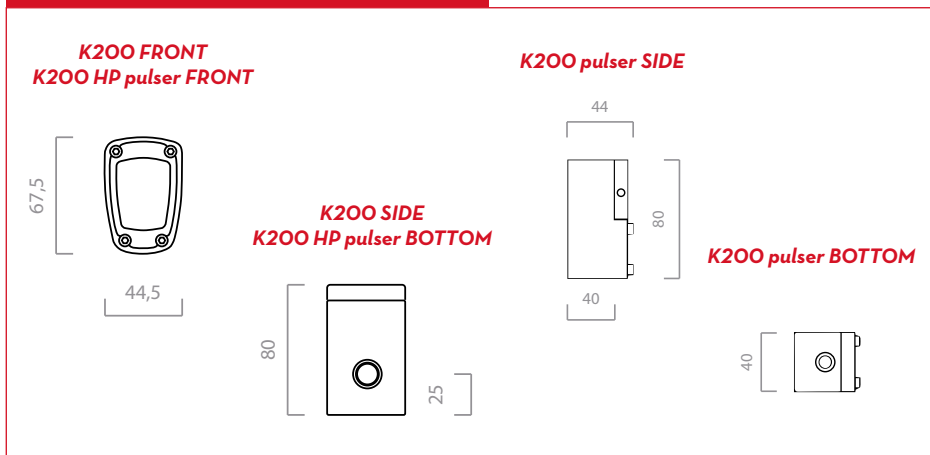

DETAILS



MATERIALS

- BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW-RATE		PRESSURE		BATTERIES INCLUDED	INTLET OUTLET
			KG/MIN	LB/MIN	BAR	PSI	AAA NO.2 2 X 1,5 V	
METERS								
FOO43012A	K200 ML/L	D O	0,1 - 2,5	0,2 - 5,5	500	7200	YES	1/8" BSP
FOO43011A	K200 GR/KG	D O G	0,1 - 2,5	0,2 - 5,5	550	7200	YES	1/8" BSP
FOO430230	K200/2	G	0,2 - 5	0,4 - 11	700	10000	YES	1/4" BSP
PULSER								
OOO452030	K200 HP PULSER	D O G	0,1 - 2,5	0,2 - 5,5	1000	14500	NO	1/8" BSP
OOO452000	K200 PULSER	D O	0,1 - 2,5	0,2 - 5,5	30	426	NO	1/4" BSP
FOO452060	K200/2 PULSER	G	0,2 - 5	0,4 - 1,1	700	10000	NO	1/4" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K200

METERS

81



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K40 METER

FEATURES

- **SMALL SIZE**
- **NO BATTERY NEEDED**
- **EASY TO RESET**
- **SHOCK ABSORBER PROTECTION**
- **IDEAL FOR MOBILE USE**
- **READY TO USE**
- **PARTIAL AND FULL TOTALIZER**
- **VERSATILE**

PERFORMANCE

up to
30 L/MIN
(up to 7,8 gpm)

FLOW-RATE

± 1 %

ACCURACY

up to
2000
cSt

VISCOSITY

0,2 %

REPEATABILITY

EN.

The Piusi K40 is a mechanical oval gear meter suitable for medium/high viscosity oils, without any need of calibration it's the simplest way to measure a wide range of lubricants.



K40



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX	✈	🚚
FOO490020	0,78	1,7	16OX115X135		1	126	144
FOO490010	0,78	1,7	16OX115X135		1	126	144



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

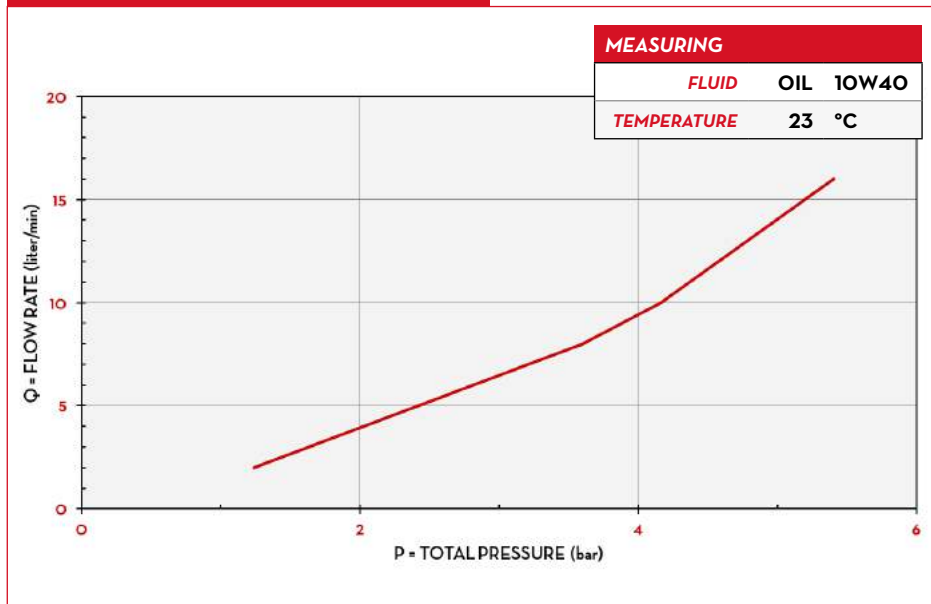

IN THE BOX

- K40 METER
- INSTRUCTION MANUAL

DETAILS



MECHANICAL COUNTER



OVAL GEAR




TOTAL PARTIAL RESETTING

MATERIALS

- BODY: ALLUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

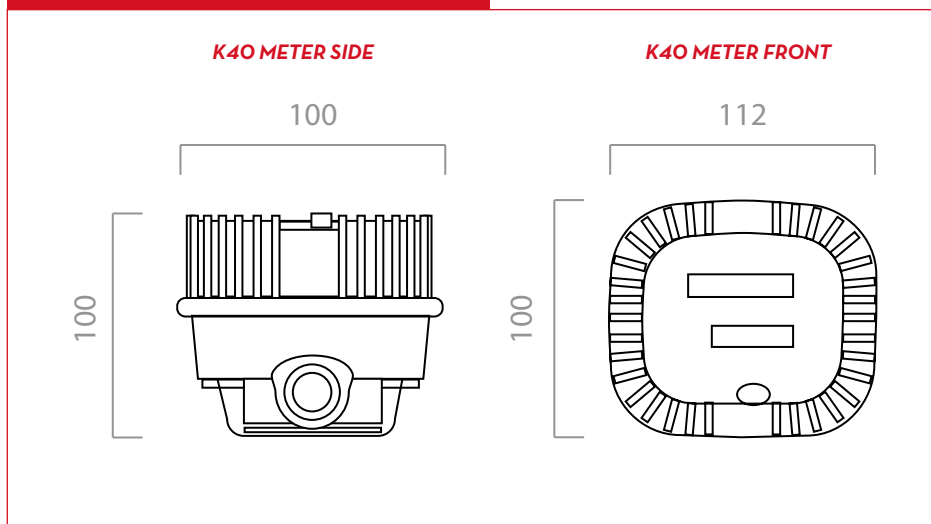

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT TYPE	 AUTOMATIC NO DRIP VALUE	FLOW-RATE		PRESSURE		INTLET	OUTLET
					L/MIN	GPM	BAR	PSI		
FO0490020	K40 MECHANICAL OIL METER LT/BSP		-	-	1 - 30	0,26 - 7,8	70	994	1/2" BSP	1/2" BSP
FO0490010	K40 MECHANICAL OIL METER QT/NPT		-	-	1 - 30	0,26 - 7,8	70	994	1/2" BSP	1/2" NPT

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K40

METERS

83



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K33 - K44

FEATURES

- READY TO USE
- INDUSTRIAL DESIGN
- NO BATTERY NEEDED
- EASY TO RESET
- VERSATILE

PERFORMANCE

up to
120 L/MIN
(up to 32 gpm)

FLOW-RATE

± 1 %

ACCURACY

30 BAR

BURSTING PRESSURE

0,2 %

REPEATABILITY

EN.

The PIUSI K33-K44 are the best seller mechanical meters in this market. Available in both three or four digits, these nutating disk meters, can be install in all the four flow direction.



K33



K44



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
K33 METER						
000550160	0,6	1,3	180X180X170		-	1
000551160	0,6	1,3	180X180X170		-	1
000557000	0,6	1,3	180X180X170		-	1
000558000	0,6	1,3	180X180X170		-	1
K44 METER						
000560160	0,6	1,3	180X180X170		-	1
000561020	0,6	1,3	180X180X170		-	1
000562020	0,6	1,3	180X180X170		-	1
000563020	0,6	1,3	180X180X170		-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER




WINDSCREEN

CHARTS

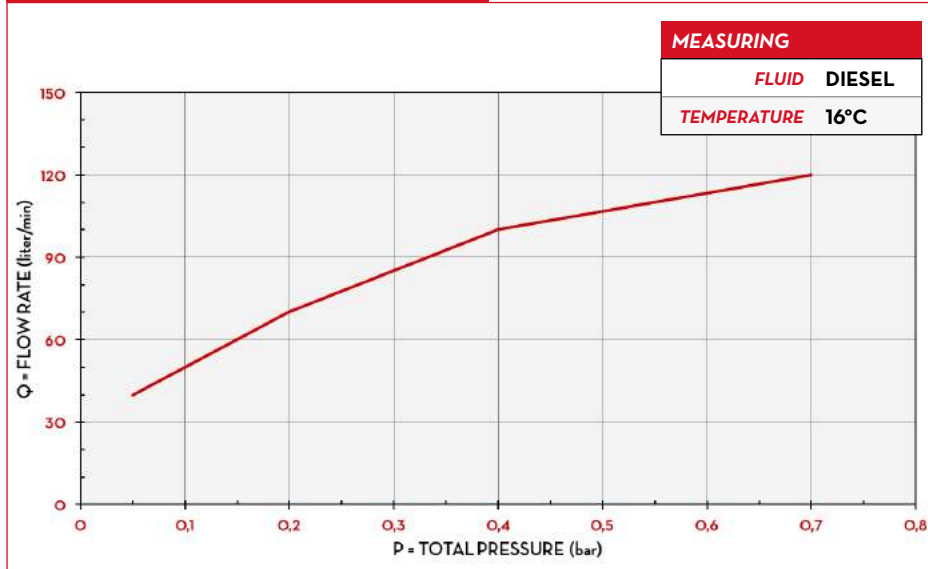

DIMENSIONS

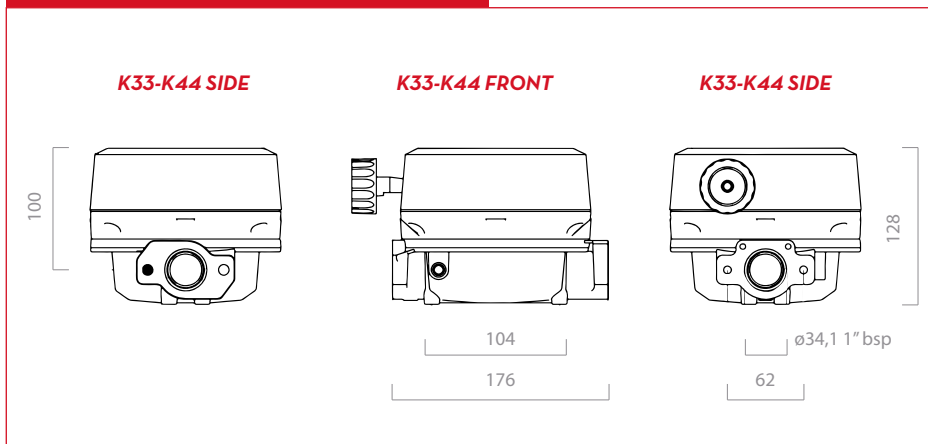

IN THE BOX

- K33 - K44 METER
- INSTRUCTION MANUAL


DETAILS



NUTATING DISK SYSTEM



MECHANICAL COUNTER



FLOW-DIRECTIONS

MATERIALS

- NUTATING DISK CHAMBER: TECHNOPOLYMER
- BODY: ALUMINIUM

TECHNICAL DATA


CODE	DESCRIPTION	FLUIDS TYPE	FLOW DIRECTION	FLOW-RATE		PRESSURE		PULSER	INTLET OUTLET
				L/MIN	GPM	BAR	PSI	P/L (P/GAL)	
K33 METER									
000550160	K33 VER. A		←	20-120	5-32	10	142	YES	1" BSP
000551160	K33 VER. B		↑	20-120	5-32	10	142	YES	1" BSP
000557000	K33 VER. C		↓	20-120	5-32	10	142	YES	1" BSP
000558000	K33 VER. D		→	20-120	5-32	10	142	YES	1" BSP
K44 METER									
000560160	K44 VER. A		←	20-120	5-32	10	142	YES	1" BSP
000561020	K44 VER. B		↑	20-120	5-32	10	142	YES	1" BSP
000562020	K44 VER. C		↓	20-120	5-32	10	142	YES	1" BSP
000563020	K44 VER. D		→	20-120	5-32	10	142	YES	1" BSP

UPON REQUEST AVAILABLE IN NPTF VERSION AND DISPLAY IN GALLON/QUARTER OR PINT

K33 - K44

METERS

85



METERS ACCESSORIES

K400

REMOTE DISPLAY

CODE

DESCRIPTION

BSP

FOO49501A

REMOTE DISPLAY UNIVERSALE

-



K600/3

REMOTE DISPLAY



CODE	DESCRIPTION	BSP
F0049501A	REMOTE DISPLAY UNIVERSALE	-
F1175200B	REMOTE DISPLAY K600/3	-



NOZZLE METERS

PIUSI
PRODUCT
PLUS

NOZZLE METERS



NO DRIP VALVE

**PRESET
(ONLY WITH K500)**

**BUILT-IN
SWIVEL**

**ALL-IN-ONE
INTEGRATED
PRODUCT**

**LONG-LIFE
BATTERY**

**BUILT-IN
LEVER LOCK**

WEAHTER PROOF





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY K400

FEATURES

- READY TO USE
- EASY TO CALIBRATE
- DOUBLE TOTALIZER
- ELECTRONIC RESET FUNCTION
- HIGH ACCURACY
- ERGONOMIC GRAB
- LOW BATTERY CONSUMPTION
- IP65 PROTECTION
- RUBBER PROTECTION
- ADJUSTABLE UMA
- SWIVEL

PERFORMANCE

up to

30 L/MIN

(up to 7,8 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

70 BAR

PRESSURE

up to

2000

cSt

VISCOSITY

EN.

The Piusi Easy K400 is the perfect synthesis for all the needs of transferring and measuring oils. It is composed by the ergonomic Easy Oil nozzle and the K400 meter.

**EASY K400**

with rigid spout



with flexible spout



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX		
FOO484000	0,5	1,1	80X80X75		1	180	180
FOO984040	1,2	2,6	300X160X110		1	180	180
FOO984010	1,5	3,3	300X160X110		1	180	180
FOO984000	1,5	3,3	300X160X110		1	180	180
FOO984070	1,5	3,3	300X160X110		1	180	180
FOO984060	1,5	3,3	300X160X110		1	180	180



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

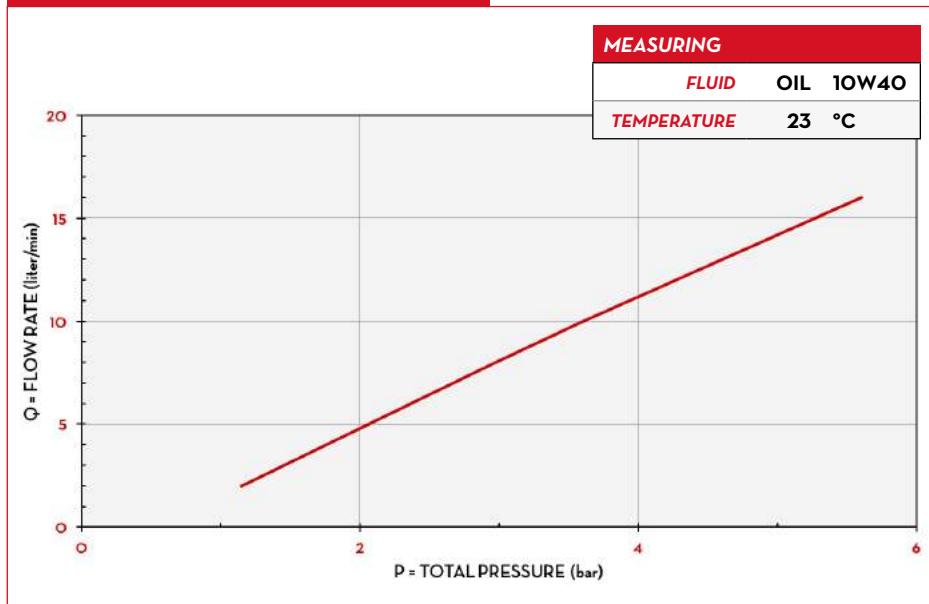

IN THE BOX

- EASYOIL NOZZLE
- K400 METER
- INSTRUCTION MANUAL

DETAILS



RESET/CALIBRATE BUTTON



MULTIFUNCTION DISPLAY




2 BATTERY AAA INCLUDED



METER WITH OVAL GEARS

DIMENSIONS

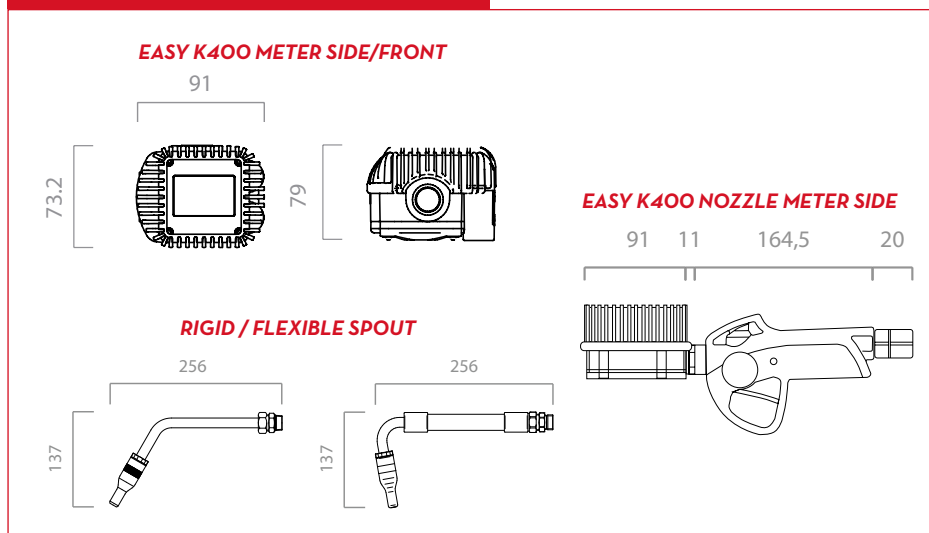

MATERIALS

- NOZZLE BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS
- METER BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT TYPE	 AUTOMATIC NO DRIP VALUE	FLOW-RATE		WORKING PRESSURE		BATTERIES 1,5 V SIZE AAA NO.	INTLET	OUTLET
					L/MIN	GPM	BAR	PSI			
FOO484000	K400 ELECTRONIC OIL METER LT/BSP	O	-	-	1-30	0,26 - 7,8	70	994	2	1/2" BSP	1/2" BSP
FOO984040	K400 NOZZLE LT/BSP	O	-	-	1-30	0,26 - 7,8	70	994	2	1/2" BSP	1/2" BSP
FOO984010	K400 NOZZLE LT/BSP WITH FLEX EXT. AP	O	FLEXIBLE AP	YES	1-30	0,26 - 7,8	70	994	2	1/2" BSP	FLEX EXT.
FOO984000	K400 NOZZLE LT/BSP WITH RIGID EXT. BP	O	RIGID AP	YES	1-30	0,26 - 7,8	70	994	2	1/2" BSP	RIGID EXT.
FOO984070	K400 NOZZLE LT/BSP WITH FLEX EXT. BP	O	FLEXIBLE BP	YES	1-30	0,26 - 7,8	70	994	2	1/2" BSP	FLEX EXT.
FOO984060	K400 NOZZLE LT/BSP WITH RIGID EXT. BP	O	RIGID BP	YES	1-30	0,26 - 7,8	70	994	2	1/2" BSP	RIGID EXT.

NPT VERSION AVAILABLE - QUART, PINT, GALLON VERSION AVAILABLE. APPROVABLE VERSION ON REQUEST

EASY K400

NOZZLE METERS

93



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY NEXT/2

FEATURES

- HIGH RATIO PRESSURE
- LOW PRESSURE DROP
- STURDY AND DURABLE
- BUILT-IN LEVER LOCK
- READY TO USE
- EASY TO CALIBRATE
- ELECTRONIC RESET FUNCTION
- LOW BATTERY CONSUMPTION
- IP65 PROTECTION
- RUBBER PROTECTION
- ADJUSTABLE UMA
- SWIVEL

PERFORMANCE

up to
60 L/MIN
(up to 15 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

70 BAR

PRESSURE

0,2 %

REPEATABILITY



EN.

The Piusi Easy NEXT/2 is the answer to all the needs of a high flow rate oil dispense and measure. It is composed by the Pistol-one nozzle and the oval gear meter NEXT/2.



with rigid spout

with flexible spout

EASY NEXT/2

PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX		
FO0974000	2,3	5,1	115X135X160		1	100	120
FO0974010	2,9	6,4	115X135X160		1	100	120
FO0974020	3	6,6	115X135X160		1	100	120



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

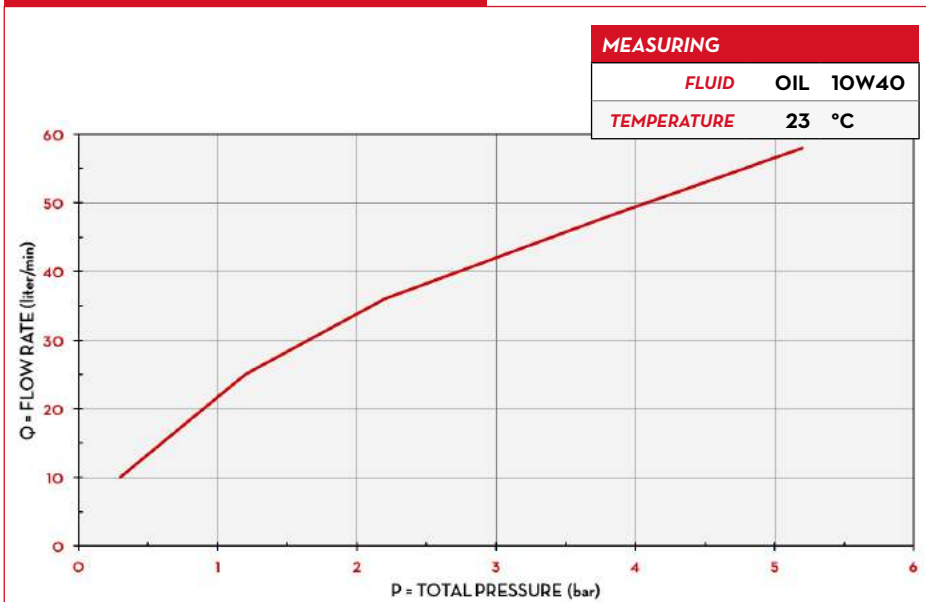


IN THE BOX

- PISTOL-ONE NOZZLE
- NEXT/2 METER
- INSTRUCTION MANUAL

NEXT/2 SIDE

NEXT/2 FRONT


DETAILS



RESET/CALIBRATE BUTTON



MULTIFUNCTION DISPLAY



SELECTED MATERIALS




METER WITH OVAL GEARS

MATERIALS


- NOZZLE BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS
- METER BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

EASY NEXT/2 METER SIDE/FRONT

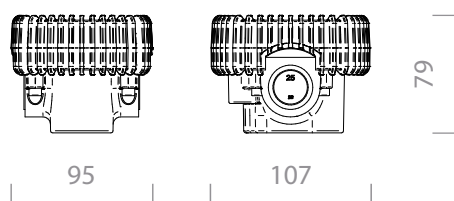

EASY NEXT/2 NOZZLE METER SIDE

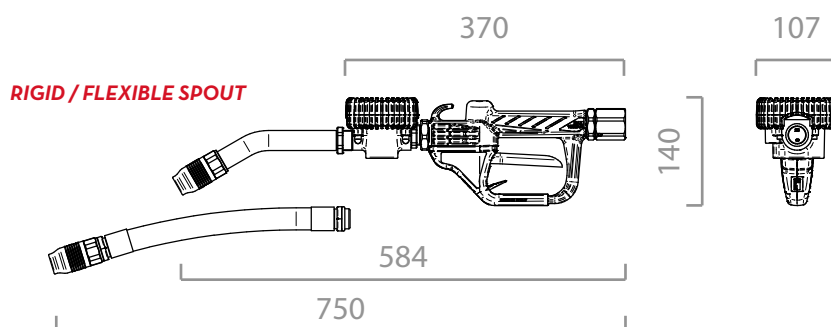

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT TYPE	SEMI AUTO-MATIC NO DRIP VALUE	FLOW-RATE		WORKING PRESSURE		BATTERY INCLUDED AAA NO. 22 X 1,5 V	INTLET	OUTLET
					L/MIN	GPM	BAR	PSI			
FO0974000	NEXT/2 NOZZLE W/O SPOUT BSP	O	-	-	6 - 60	1,5 - 15	70	994	2	3/4" BSP	-
FO0974010	NEXT/2 NOZZLE W/RIGID SPOUT BSP	O	RIGID	YES	6 - 60	1,5 - 15	70	994	2	3/4" BSP	RIGID EXT.
FO0974020	NEXT/2 NOZZLE W/FLEX SPOUT BSP	O	FLEXIBLE	YES	6 - 60	1,5 - 15	70	994	2	3/4" BSP	FLEX EXT.

EASY NEXT/2

NOZZLE METERS

95



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

K500

FEATURES

- PRESET MEMORY (UP TO 5 RECORDS)
- HIGH ACCURACY
- STANDARD BATTERY AA
- ERGONOMIC GRAB
- ROTATING SPOUT
- SHOCK ABSORBER PROTECTION
- IP55 PROTECTION
- ADJUSTABLE UMA

PERFORMANCE

up to
30 L/MIN
(up to 7,8 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

70 BAR

PRESSURE

up to
2000
cSt

VISCOSITY

EN.

The Piusi K500 is the most widespread preset nozzle for oil. It has an ergonomic handle, an oval gear meter and a preset function to always choose the right quantity before to dispense.



K500



A

ROTATING SPOUT
R12519000
pag. 105



B

FLEXIBLE SPOUT
FO0676070
pag. 105



C

RIGID SPOUT
FO0676080
pag. 105



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX		
FO068700D	1,8	4	28OX16OX140		1	128	160
FO068720A	1,8	4	28OX16OX140		1	128	160
FO0687221A	1,8	4	28OX16OX140		1	128	160
FO068600D	1,8	4	28OX16OX140		1	128	160



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

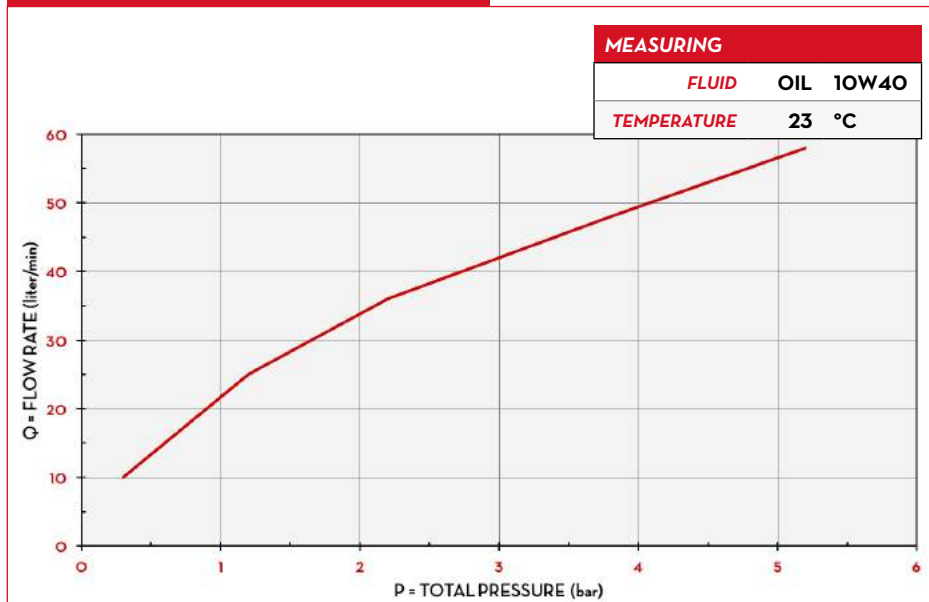

IN THE BOX

- K500 NOZZLE
- INSTRUCTION MANUAL

DETAILS



EASY PRESET QUANTITY



HIGH PROTECTION



BATTERY COMPARTMENT




METER WITH OVAL GEARS

MATERIALS

- NOZZLE BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS
- METER BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

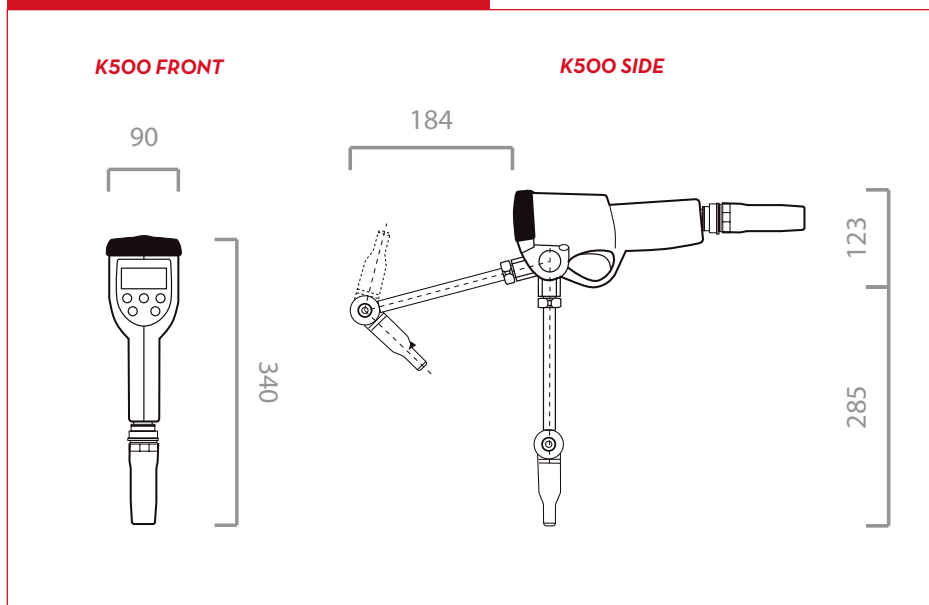

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT TYPE	AUTOMATIC NO DRIP VALVE	FLOW-RATE		AIR PRESSURE		BATTERIES SIZE 1,5 V AA NO.	INTLET
					L/MIN	GPM	BAR	PSI		
FO068700D	K500 W/ARTICULABLE SPOUT	O	A	YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" BSP
FO068720A	K500 W/RIGID SPOUT	O	C	YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" BSP
FO0687221A	K500 W/FLEXIBLE SPOUT	O	B	YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" BSP
FO068600D	K500 W/ARTICULABLE SPOUT	O	A	YES	1 ÷ 30	0,26 ÷ 7,8	70	994	4	1/2" NPT

K500

NOZZLE METERS

97



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY K40

FEATURES

- NO CALIBRATION REQUIRED
- NON RESETTABLE TOTALIZER
- NO BATTERY NEEDED
- MECHANICAL RESET BUTTON
- SWIVEL

PERFORMANCE

up to
30 L/MIN
(up to 7,8 gpm)

FLOW-RATE

± 1 %

ACCURACY

70 BAR

PRESSURE

up to
2000
cSt

VISCOSITY

EN.

The Piusi Easy K40 is the simplest solution for the delivery and measuring of oil. It is composed by the ergonomic Easy Oil nozzle and the K40 meter.



EASY K40



with rigid spout

with flexible spout



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX		
F00490020	0,78	1,7	160X115X135		1	126	144
F00490010	0,78	1,7	160X115X135		1	126	144
F00973000	1,23	2,7	345X165X120		1	126	144
F00973010	1,23	2,7	345X165X120		1	126	144
F00973020	1,53	3,4	345X165X120		1	126	144
F00973030	1,53	3,4	345X165X120		1	126	144



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

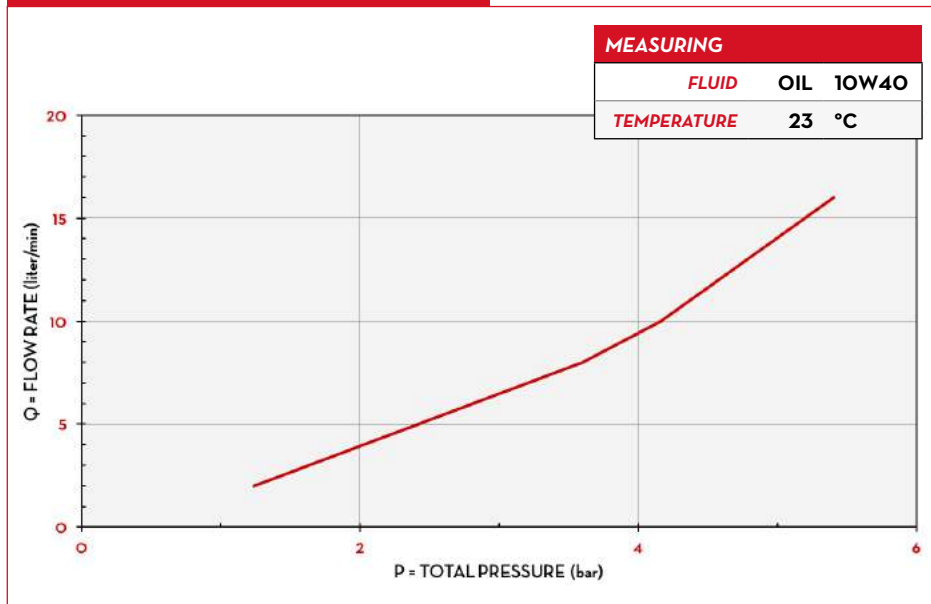

IN THE BOX

- EASYOIL NOZZLE
- K40 METER
- INSTRUCTION MANUAL


DETAILS



MECHANICAL COUNTER



RESET BUTTON



SELECTED MATERIALS




METER WITH OVAL GEARS

MATERIALS

- NOZZLE BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS
- METER BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

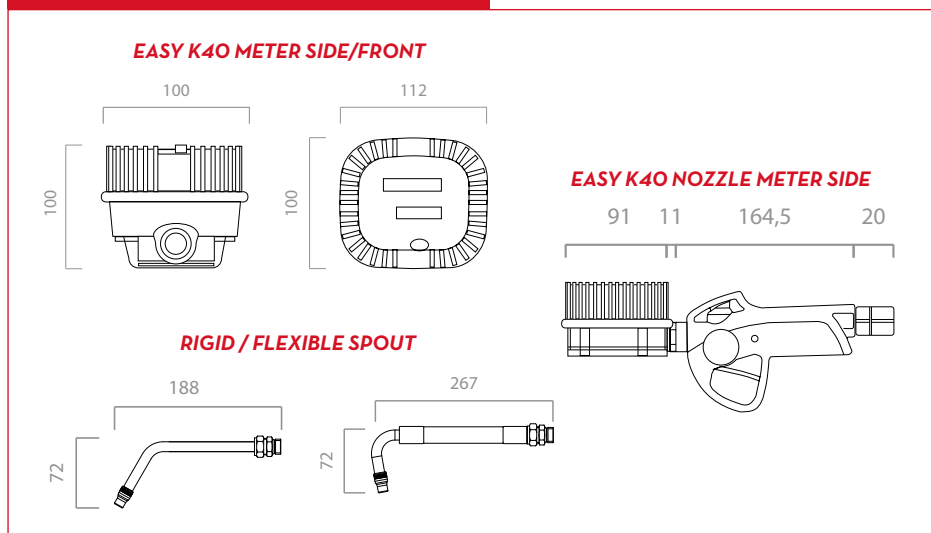

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT TYPE	AUTOMATIC NO DRIP VALUE	FLOW-RATE		PRESSURE		INTLET	OUTLET
					L/MIN	GPM	BAR	PSI		
FOO490020	K40 MECHANICAL OIL METER LT/BSP	O	-	-	1-30	0,26 - 7,8	70	994	1/2" BSP	1/2" BSP
FOO490010	K40 MECHANICAL OIL METER QT/NPT	O	-	-	1-30	0,26 - 7,8	70	994	1/2" BSP	1/2" NPT
FOO973000	K40 NOZZLE LT/BSP	O	-	-	1-30	0,26 - 7,8	70	994	1/2" BSP	1/2" BSP
FOO973010	K40 NOZZLE QT/NPT	O	-	-	1-30	0,26 - 7,8	70	994	1/2" BSP	1/2" NPT
FOO973020	K40 NOZZLE LT/BSP WITH FLEX EXT.	O	FLEXIBLE	YES	1-30	0,26 - 7,8	70	994	1/2" BSP	EXT. FLEX
FOO973030	K40 NOZZLE LT/BSP WITH RIGID EXT.	O	RIGID	YES	1-30	0,26 - 7,8	70	994	1/2" BSP	EXT. RIGID

EASY K40

NOZZLE METERS



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

GREASTER

FEATURES

- HIGH PRESSURE
- SMALL SIZE
- EASY TO CALIBRATE
- STANDARD BATTERY AAA
- DOUBLE TOTALIZER
- BUILT-IN LEVER LOCK
- ADJUSTABLE UMA
- SWIVEL

PERFORMANCE

up to
2,5 KG/MIN

FLOW-RATE

± 3 %

ACCURACY

550 BAR

PRESSURE

EN.

The Greaster is the well known Piusi answer to all the needs of measuring grease with a nozzle. Besides a handy grab this nozzle comes with a built in version the the Piusi K200 meter.



GREASTER



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO43000A	2,3	5,1	310X170X55	12,2X6,7X2,2		1
FOO43002A	2,6	5,7	310X170X55	12,2X6,7X2,2		1
FOO43100A	2,3	5,1	310X170X55	12,2X6,7X2,2		1
FOO43011A	0,5	1,1	310X170X55	12,2X6,7X2,2		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

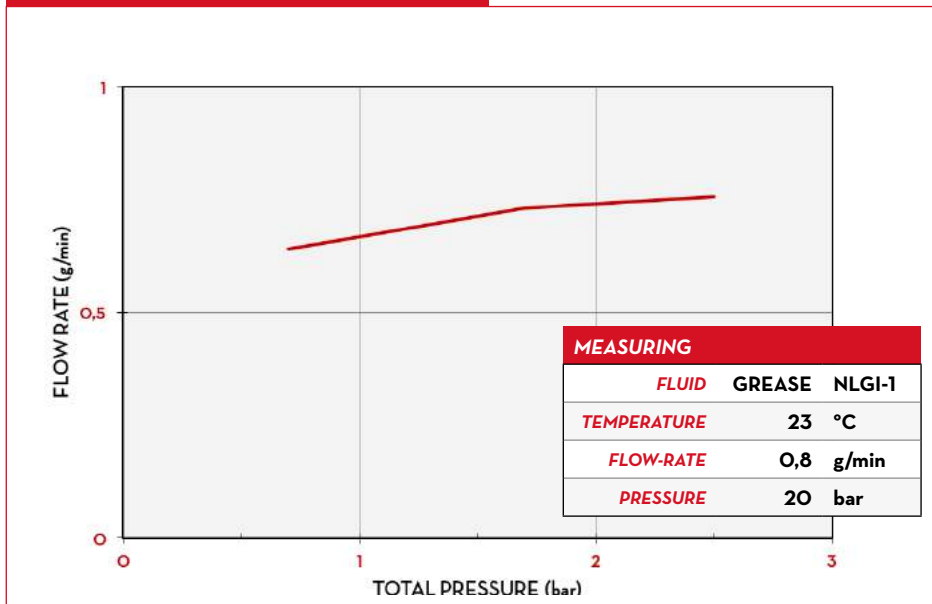

IN THE BOX

- GREASTER NOZZLE
- INSTRUCTION MANUAL

DETAILS



RESET/CALIBRATE BUTTON



MULTIFUNCTION DISPLAY




METER WITH OVAL GEARS

MATERIALS

- NOZZLE BODY: ALUMINIUM
- VALVE: STEEL
- METER BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

DIMENSIONS

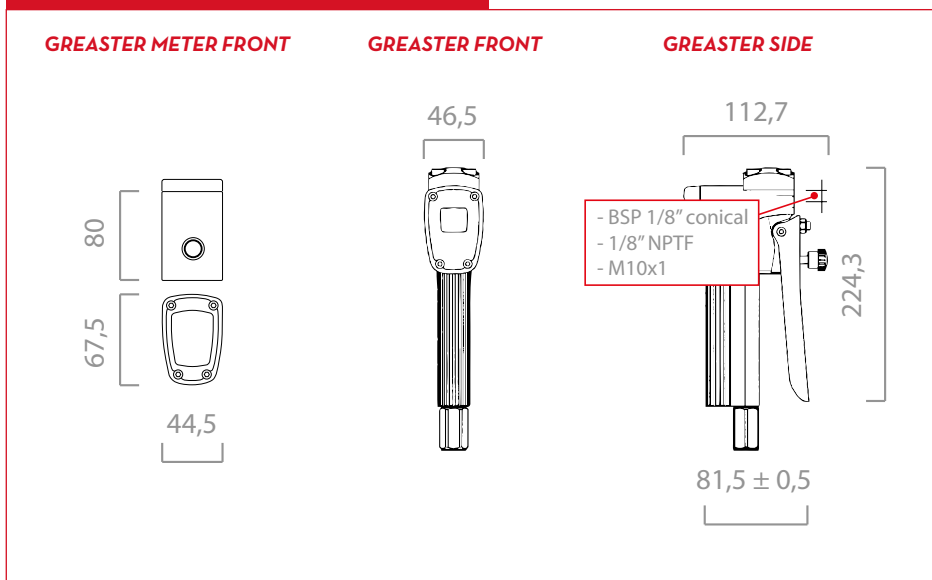

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE			BATCH TOTAL	CUMULATIVE TOTAL	FLOW-RATE		AIR PRESSURE		INTLET	OUTLET
							KG/MIN	LB/MIN	BAR	PSI		
FOO43000A	GREASTER GR/KG	G	-	-	GR	KG	0,1 - 2,5	0,2 - 5,5	550	-	1/4" BSP	1/8" BSP
FOO43002A	GREASTER GR/KG M10X1	G	-	-	GR	KG	0,1 - 2,5	0,2 - 5,5	550	-	1/4" BSP	M 10X1
FOO43100A	GREASTER GR/KG WITH RIGID SPOUT AND Z-SWIVEL	G	YES	YES	GR	KG	0,1 - 2,5	0,2 - 5,5	550	-	1/4" BSP	M 10X1
FOO43011A	IN LINE GREASE METER	G	-	-	GR	KG	0,1 - 2,5	0,2 - 5,5	550	-	1/8" BSP	1/8" BSP

UPON REQUEST AVAILABLE IN OZ/LB VERSION

GREASTER

NOZZLE METERS

101



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY K24 WINDSCREEN

FEATURES

- READY TO USE
- ERGONOMIC GRAB
- LOW WEIGHT

EN.

The Piusi Easy Windscreen is a manual nozzle suitable for the delivery of windscreen and antifreeze. It comes with the windscreen version of the K400 meter.

PERFORMANCE

up to
120 L/MIN
(up to 30 gpm)

FLOW-RATE

± 0,5 %

ACCURACY

25 BAR

PRESSURE

less than

1 KG

weight

NOZZLE



Manual nozzle with K24



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
NOZZLE METERS						
FO0870020	1	2,2	300X390X260	11,8X15,4X10,2	-	1
FO0976W0A	0,95	2,1	300X390X260	11,8X15,4X10,2	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN

CHARTS

MEASURING

FLUID	WATER
TEMPERATURE	23 °C

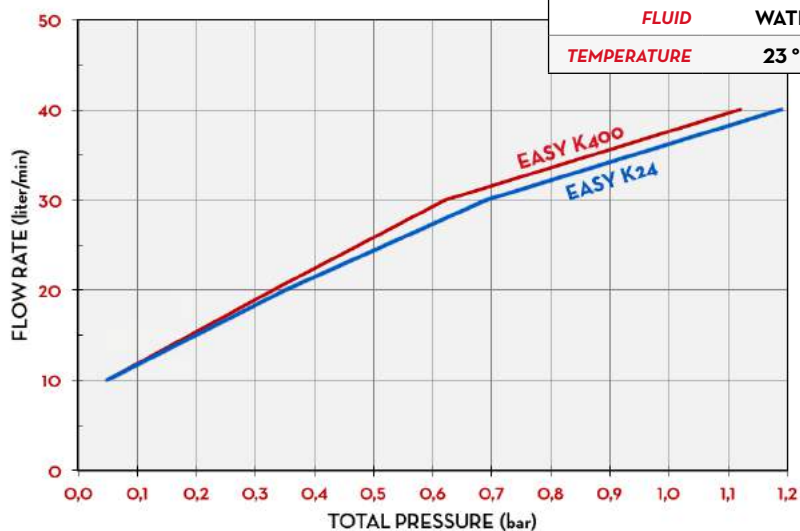

IN THE BOX

- EASY WINDSCREEN NOZZLE
- K24 METER
- INSTRUCTION MANUAL

DETAILS




AVAILABLE WITH K24




METER WITH OVAL GEARS

DIMENSIONS

EASY K24 WINDSCREEN

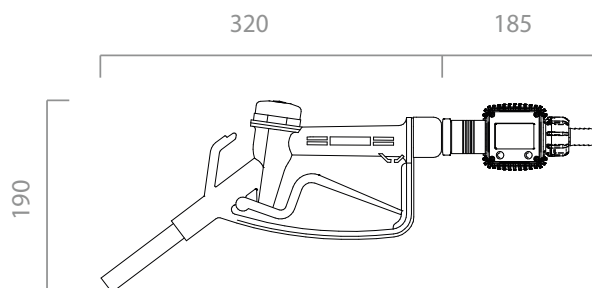

EASY K400 WINDSCREEN

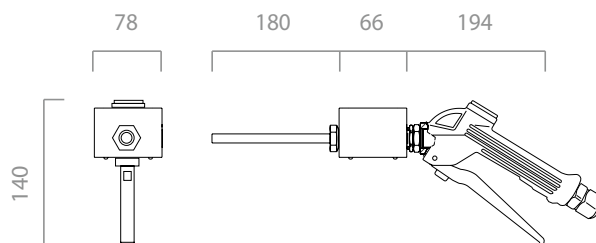

MATERIALS

- NOZZLE BODY: TECHNOPOLYMER
- VALVE: VITON
- METER BODY: ALUMINIUM
- GEARS: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOR RATE		PRESSURE		BATTERIES	INLET	OUTLET
			L/MIN	GPM	BAR	PSI	SIZE N NO.		
NOZZLE METERS									
FO0870020	EASY K24 WINDSCREEN	 	5 - 80	1,3 - 21	3,4	49	2	-	-
FO0976WOA	EASY K400 WINDSCREEN	 	1 - 30	0,3 - 8	25	362	2	1/2 BSP	-

EASY K24 WINDSCREEN

NOZZLE METERS

103



NOZZLE METERS ACCESSORIES

EASY K40 - K400

RIGID SPOUTS	CODE	DESCRIPTION	PIECE
	FOO665000	RIGID SPOUT W\AUTO ANTI-DRIP VALVE HP	A
	FOO67000A	RIGID SPOUT W\AUTO ANTI-DRIP VALVE LP	B
	FOO67002A	RIGID SPOUT 90MM B/P	B
	OOO934000	RIGID SPOUT W\MAN ANTI-DRIP VALVE HF	C
	OOO938000	RIGID SPOUT W\MAN ANTI-DRIP VALVE LF	D

FLEXIBLE SPOUTS	CODE	DESCRIPTION	PIECE
	FOO666000	FLEX SPOUT W\AUTO ANTI-DRIP VALVE HP	A
	FOO67100A	FLEX SPOUT W\AUTO ANTI-DRIP VALVE LP	B
	OOO935000	FLEX SPOUT W\MAN ANTI-DRIP VALVE HF	C
	FOO939000	FLEX SPOUT W\MAN ANTI-DRIP VALVE LF	D



MANUAL ANTI-DRIP VALVE	CODE	DESCRIPTION
	FOO690000	MAN ANTI-DRIP VALVE GAS 1/4IN LF
	FOO691000	MAN ANTI-DRIP VALVE BSP 1/2IN HF
	FOO695000	MAN ANTI-DRIP VALVE GAS 3/8IN HF
	FOO694000	MAN ANTI-DRIP VALVE NPTF 1/2IN HF

AUTO ANTI-DRIP VALVE	CODE	DESCRIPTION
	FOO660000	AUTO ANTI-DRIP VALVE HP
	FOO663000	AUTO ANTI-DRIP VALVE HP 1/4IN NPT
	FOO664000	AUTO ANTI-DRIP VALVE HP 1/2IN NPT

SWIVEL	CODE	DESCRIPTION
	FO845600A	SWIVEL 12.12

FILTER	CODE	DESCRIPTION
	FO9949000	EASYOIL FILTER 11.8X80

SWIVEL RUBBER PROTECTORS	CODE	COLORS
	FO965900	BLACK
	FO965900	YELLOW
	FO965900	GREEN
	FO965900	RED
	FO965900	BLUE

K500

RIGID SPOUTS

CODE	DESCRIPTION
FOO676080	B/P



FLEXIBLE SPOUTS

CODE	DESCRIPTION
FOO676070	B/P



ROTATING SPOUTS

CODE	DESCRIPTION
R12519000	ROTATING SPOUT A/P WITH AUTOMATIC ANTI DRIP VALVE



MANUAL NOZZLE

CODE	DESCRIPTION
FOO676040	L/F



FLEXIBLE SPOUT

CODE	DESCRIPTION
FOO676050	H/F



FLEXIBLE SPOUTS

CODE	DESCRIPTION
FOO676060	A/P



EASY NEXT/2

RIGID SPOUTS

CODE	DESCRIPTION
F16005010	BSP B/P WITH SEMI-AUTOMATIC NO-DRIP VALVE



FLEXIBLE SPOUTS

CODE	DESCRIPTION
F16004010	BSP B/P WITH SEMI-AUTOMATIC NO-DRIP VALVE





NOZZLE

PIUSI
PRODUCT
PLUS

NOZZLE



**BUILT-IN
SWIVEL**

**BUILT-IN
LEVER LOCK**

LEVER GUARD

**ERGONOMIC
HANDLE**

NO DRIP VALVE





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASYOIL

FEATURES

- **BALANCED VALVE**
- **LIGHT PRESSION LEVER**
- **ERGONOMIC GRAB**
- **BUILT-IN FILTER**
- **BUILT-IN LEVER LOCK**
- **COLOUR CODE SWIVEL**

PERFORMANCE

up to
30 L/MIN
(up to 7,8 gpm)

FLOW-RATE

70 BAR

PRESSURE

EN.

The Piusi Easy oil is a manual nozzle suitable for the delivery of a wide range of oils. Its ergonomic design and low weight make this nozzle unique in the market.



EASYOIL



with flexible spout



with rigid spout



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO96600A	0,45	1	203X320X88	8X12,6X3,5		1
FOO966130	1,2	2,6	203X320X88	8X12,6X3,5		1
FOO966140	1,2	2,6	203X320X88	8X12,6X3,5		1
FOO966150	1,2	2,6	203X320X88	8X12,6X3,5		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

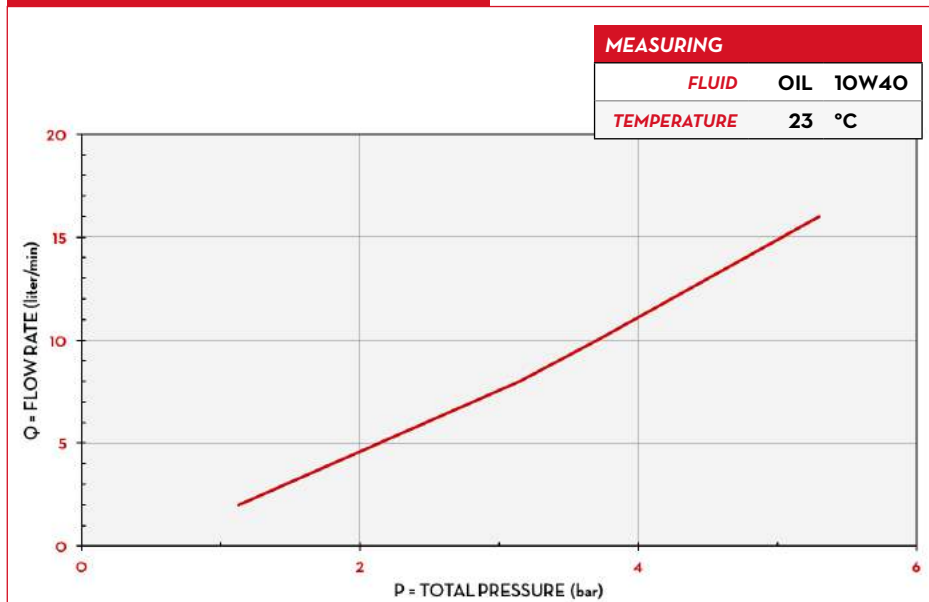

IN THE BOX

- EASYOIL NOZZLE
- INSTRUCTION MANUAL


DETAILS



1/2" INLET



ALUMINIUM BODY




ANTI-SHOCK HANDGRIP

MATERIALS

- BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS

DIMENSIONS

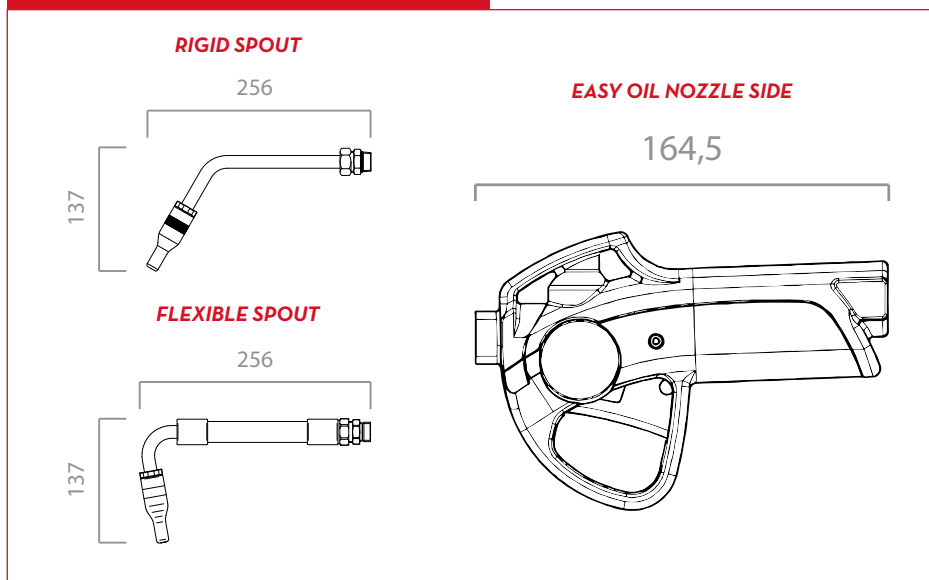

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	SPOUT			INTLET
			ROTATING	RIGID	FLEXIBLE	
FOO96600A	EASYOIL FF 1/2" X 1/2" BSP	O	-	-	-	1/2" BSP
FOO966130	EASYOIL + SWIVEL 1/2" + RIGID SPOUT	O	-	YES	-	1/2" BSP
FOO966140	EASYOIL + SWIVEL 1/2" + FLEXIBLE SPOUT	O	-	-	YES	1/2" BSP
FOO966150	EASYOIL + SWIVEL 1/2" + ROTATING SPOUT	O	YES	-	-	1/2" BSP

NPT VERSION AVAILABLE

EASYOIL

NOZZLE

111



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

PISTOL-ONE

FEATURES

- HIGH RATIO PRESSURE
- LOW PRESSURE DROP
- STURDY AND DURABLE
- SURFACE POLISHING PROTECTION
- HIGH PERFORMANCE SWIVEL
- BUILT-IN LEVER LOCK

PERFORMANCE

up to
90 L/MIN
(up to 23,8 gpm)

FLOW-RATE

100 BAR

PRESSURE

EN.

The Piusi Pistol-one is a manual nozzle suitable for the delivery of a wide range of oils at high flow rates. Its sturdy design makes this nozzle suitable for heavy duty operations.



PISTOL-ONE



with flexible spout

with rigid spout



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
F00640000	1,3	2,9	300X180X80	11,8X7,1X3,1		1
F00640010	1,9	4,2	300X180X80	11,8X7,1X3,1		1
F00640020	2,0	4,2	300X180X80	11,8X7,1X3,1		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN


CHARTS

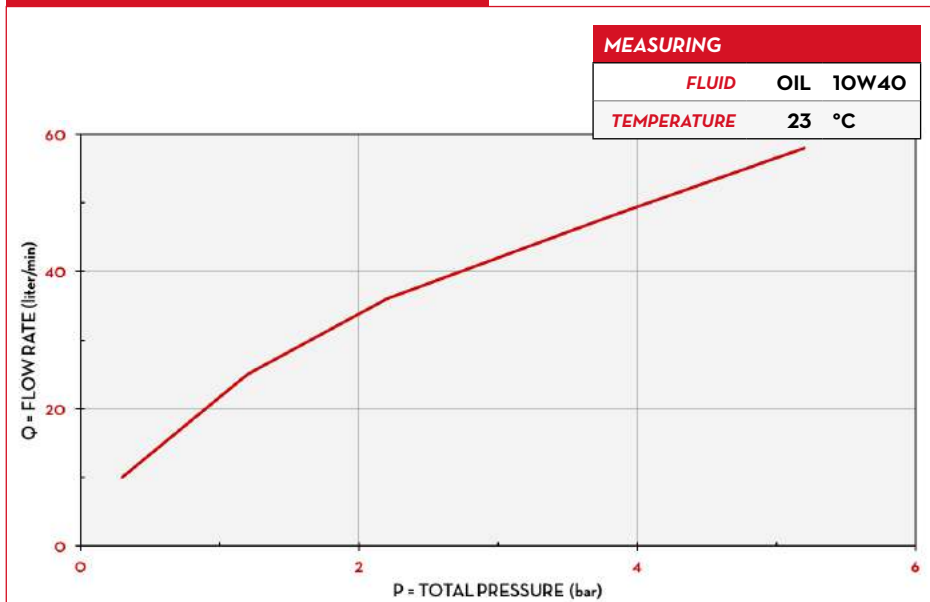

IN THE BOX

- PISTOL-ONE NOZZLE
- INSTRUCTION MANUAL


DETAILS



LEVER PROTECTION




ERGONOMIC AND COMPACT



HEAVY DUTY DESIGN

DIMENSIONS

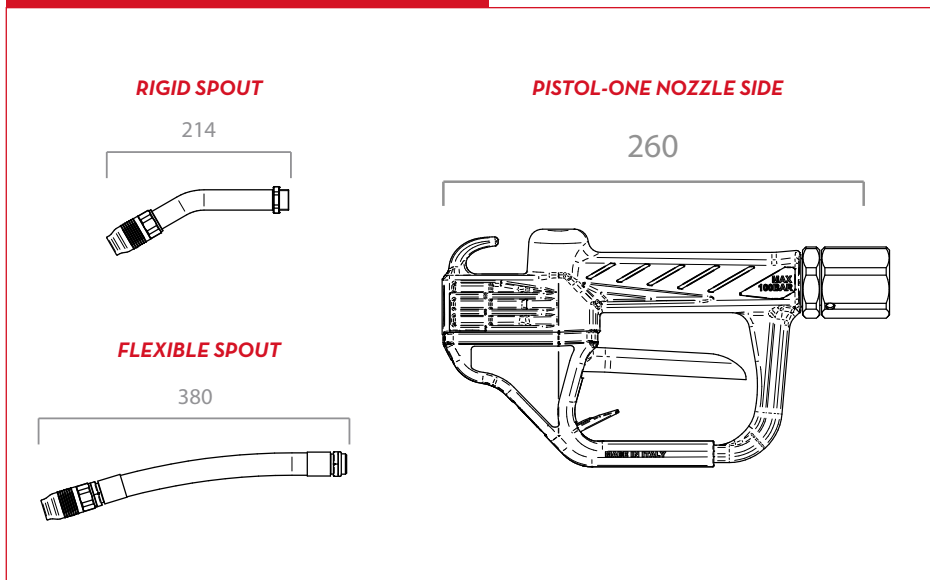

MATERIALS

- BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE			INTLET
			RIGID	FLEXIBLE	
FO0640000	PISTOL-ONE + SWIVEL 3/4"		-	-	3/4" BSP
FO0640010	PISTOL-ONE + SWIVEL 3/4" + RIGID SPOUT		YES	-	3/4" BSP
FO0640020	PISTOL-ONE + SWIVEL 3/4" + FLEXIBLE SPOUT		-	YES	3/4" BSP

NPT VERSION AVAILABLE

PISTOL-ONE

NOZZLE

113



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY WINDSCREEN

FEATURES

- LOW WEIGHT
- ERGONOMIC GRABS
- READY TO USE

PERFORMANCE

up to
150 L/MIN
(up to 40 gpm)

FLOW-RATE

less than
1 KG
weight

NOZZLE

EN.

The Piusi Easy Windscreen is a manual nozzle suitable for the delivery of windscreen and antifreeze. It stands out for its minimal design.



MANUAL NOZZLE

EASY WINDSCREEN



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
NOZZLES						
FO0976W10	0,45	1	203X320X88	8,12,6X31,5		1
FO063001A	0,2	0,4	-	-		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

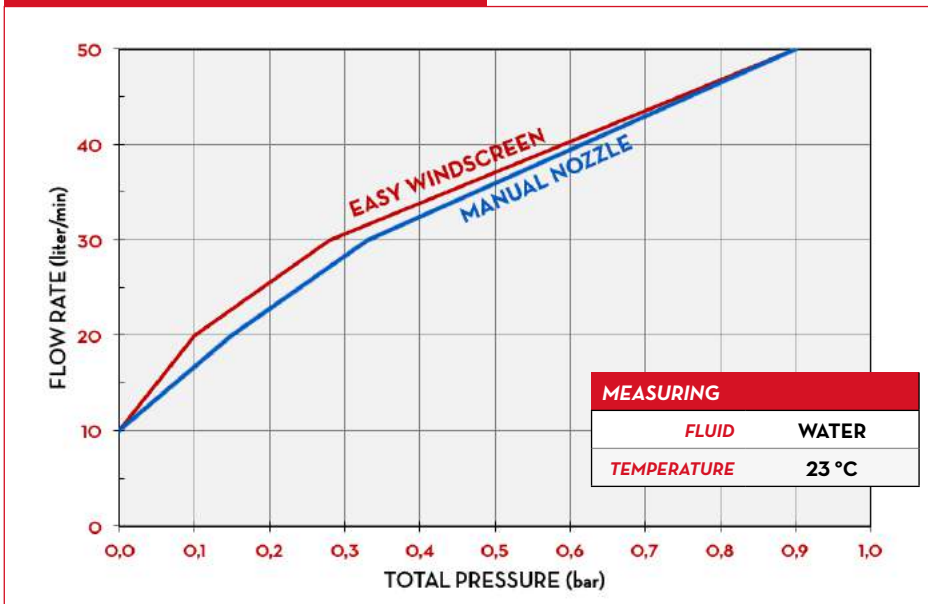

IN THE BOX

- EASY WINDSCREEN NOZZLE

DETAILS




LEVER LOCK



LEVER LOCK

DIMENSIONS

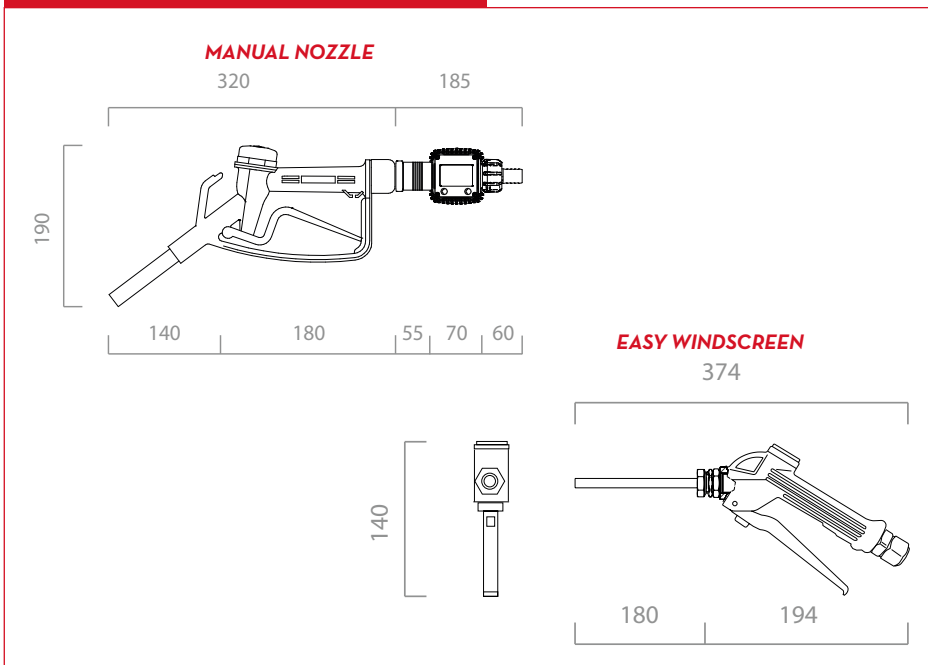

MATERIALS

- BODY: TECHNOPOLYMER
- VALVE: VITON

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOR RATE		PRESSURE		BATTERIES	INLET	OUTLET
			L/MIN	GPM	BAR	PSI	SIZE N NO.		
NOZZLES									
FO0976W10	EASY WINDSCREEN	 	-	-	25	362	-	1/2" BSP	-
FO063001A	MANUAL NOZZLE	 	1 - 80	0,3 - 21	3,4	49	-	3/4" HOSE TAIL	-

EASY WINDSCREEN

NOZZLE

115




NOZZLE ACCESSORIES

EASY OIL

RIGID SPOUTS	CODE	DESCRIPTION	PIECE
	FOO665000	RIGID SPOUT W\AUTO ANTI-DRIP VALVE HP	A
	FOO67000A	RIGID SPOUT W\AUTO ANTI-DRIP VALVE LP	B
	FOO67002A	RIGID SPOUT 90MM B/P	B
	OOO934000	RIGID SPOUT W\MAN ANTI-DRIP VALVE HF	C
	OOO938000	RIGID SPOUT W\MAN ANTI-DRIP VALVE LF	D

FLEXIBLE SPOUTS	CODE	DESCRIPTION	PIECE
	FOO666000	FLEX SPOUT W\AUTO ANTI-DRIP VALVE HP	A
	FOO67100A	FLEX SPOUT W\AUTO ANTI-DRIP VALVE LP	B
	OOO935000	FLEX SPOUT W\MAN ANTI-DRIP VALVE HF	C
	FOO939000	FLEX SPOUT W\MAN ANTI-DRIP VALVE LF	D

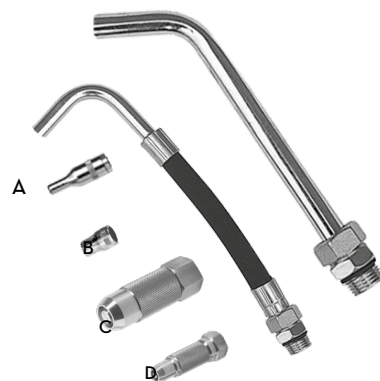

MANUAL ANTI-DRIP VALVE	CODE	DESCRIPTION
	FOO690000	MAN ANTI-DRIP VALVE GAS 1/4IN LF
	FOO691000	MAN ANTI-DRIP VALVE BSP 1/2IN HF
	FOO695000	MAN ANTI-DRIP VALVE GAS 3/8IN HF
	FOO694000	MAN ANTI-DRIP VALVE NPTF 1/2IN HF

AUTO ANTI-DRIP VALVE	CODE	DESCRIPTION
	FOO660000	AUTO ANTI-DRIP VALVE HP
	FOO663000	AUTO ANTI-DRIP VALVE HP 1/4IN NPT
	FOO664000	AUTO ANTI-DRIP VALVE HP 1/2IN NPT

SWIVEL	CODE	DESCRIPTION
	FO845600A	SWIVEL 12.12

FILTER	CODE	DESCRIPTION
	FO9949000	EASYOIL FILTER 11.8X80

SWIVEL RUBBER PROTECTORS	CODE	COLORS
	FO965900	BLACK
	FO965900	YELLOW
	FO965900	GREEN
	FO965900	RED
	FO965900	BLUE

PISTOL - ONE

RIGID SPOUTS

CODE

DESCRIPTION

F16005010

BSP B/P WITH SEMI-AUTOMATIC NO-D RIP VALVE



FLEXIBLE SPOUTS

CODE

DESCRIPTION

F16004010

BSP B/P WITH SEMI-AUTOMATIC NO-D RIP VALVE





WASTE OIL EQUIPMENT

PIUSI PRODUCT PLUS

OIL DRAINER



MAINTENANCE
FREE

EASY TO MOVE

LONG LASTING

STURDY
APPLICATION

OIL ELECTRIC DRAINER



**AUTOMATIZED
WORKING**

**NO OPERATOR
NEEDED**

**SUITABLE FOR
IN-LINE INTEGRATED
APPLICATION**

**NO AIR
COMPRESSED
NEEDED**

**OIL DISCHARGING
DIRECTLY IN
WASTE OIL TANK**

**EASY
MAINTENANCE**





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY DRAINER 80

FEATURES

- COMPRESSED AIR NOT REQUIRED
- READY / EASY TO USE
- EASY TO MOVE
- COMPACTNESS
- LEVEL INDICATOR
- GRATE DRIPPING SYSTEM
- COLLECTION TANK
- TELESCOPIC

PERFORMANCE

up to
80 L

(up to 21,1 gal)

TANK CAPACITY

up to
12 L

BOWL CAPACITY

2

meters

DISCHARGING PIPE

EN.

The Piusi Easy Drainer 80 is the simplest equipment to answer any need of draining oil out from a vehicle. Its mobile cart allows the system to be used on any surface.



EASY DRAINER 80



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0215A20	27,5	60,6	480X520X1210	18,1X18,1X39,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

DIMENSIONS

EASY-DRAINER 80

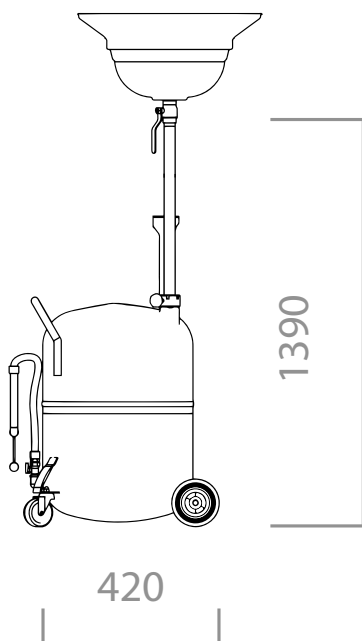

IN THE BOX

- EASY DRAINER
- INSTRUCTION MANUAL

DETAILS



INFLATING VALVE + GAUGE



RECOVERY VIEWER



VACUUM GAUGE



SUCTION PROBES

MATERIALS

- BODY: CAST IRON

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	TANK CAPACITY		TANK LEVEL GAUGE	BOWL Ø 520 MM CAPACITY	DISCHARGE SAFETY VALVE	FLEXIBLE PROBES KIT	DISCHARGING PIPE	SUCTION PIPE	TRANSPARENT VIEWER
			LIT	GAL							
FOO215A20	EASY-DRAINER 80		80	21,1	YES	12	YES	NO	2	NO	NO

EASY DRAINER 80



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VACU DRAINER 80 / VACU 80

FEATURES

- GRADUATED VIEWER
- TRANSPARENT SUCTION CHAMBER
- DEPRESSION/LEVEL INDICATOR
- COMPRESSED AIR NOT REQUIRED
- READY / EASY TO USE
- COMPACTNESS / MOBILE
- GRATE DRIPPING SYSTEM
- COLLECTION TANK
- TELESCOPIC

PERFORMANCE

up to
80 L
(up to 21,1 gal)

TANK CAPACITY

up to
12 L

BOWL CAPACITY

2
meters

DISCHARGING PIPE

EN.

The Piusi VACU DRAINER 80o/VACU 80 is the evolution of the well known EASY DRAINER 80o, the built-in measuring gauge allows to continuously control the amount of waste oil coming from the vehicle.



VACU DRAINER 80

VACU 80



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO215A40	28,2	62,2	480X480X1030	18,8X18,9X40,5		1
FOO215A30	32,5	71,6	480X520X1210	18,8X20,8X47,6		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN

CHARTS

VACU-DRAINER 80

VACU 80

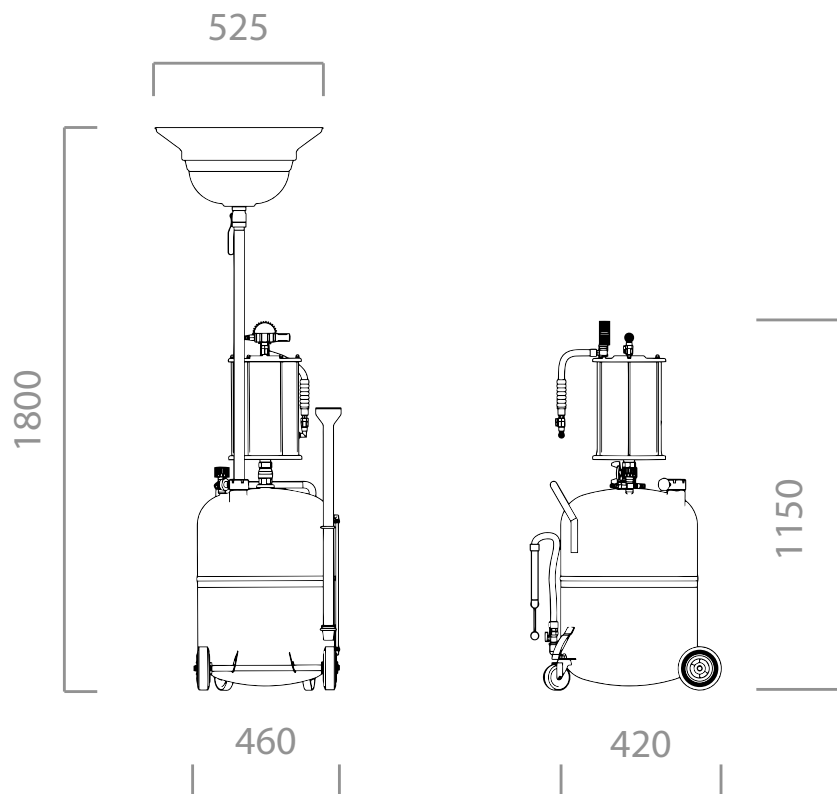

IN THE BOX

- VACU DRAINER
- INSTRUCTION MANUAL

DETAILS



INFLATING VALVE + GAUGE



GRADUATED VIEWER



VACUUM GAUGE



SUCTION PROBES

MATERIALS

- BODY: CAST IRON

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	TANK CAPACITY		TANK LEVEL GAUGE	BOWL Ø 520 MM CAPACITY	DISCHARGE SAFETY VALVE	FLEXIBLE PROBES KIT	DISCHARGING PIPE	SUCTION PIPE	TRANSPARENT VIEWER
			LIT	GAL							
FOO215A40	VACU 80		80	21,1	YES	NO	YES	YES	2	2	9
FOO215A30	VACU-DRAINER 80		80	21,1	YES	12	YES	YES	2	2	9

VACU DRAINER 80 / VACU 80



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

VACUBOX

FEATURES

- AUTOMATIC OPERATION
- COMPRESSED AIR NOT REQUIRED
- NO EMPTYING NEEDED
- IDEAL FOR CENTRALIZED SYSTEM
- COMPATIBLE WITH ANY ROLLER
- ACUSTIC SIGNAL
- DEPRESSION INDICATOR
- OPERATOR NOT REQUIRED
- ASPIRATION FROM DEEPSTICK BONNET
- HIGH SUCTION CAPACITY

PERFORMANCE

up to
10 L
(up to 3 gpm)

TANK CAPACITY

continuous
230 V
AC operation

VOLTAGE

below
65 dB

NOISE LEVEL

EN.

The Piusi VACUBOX is the perfect solution to automatically drain oil from a tank without the need of compressed air. Inside this all inclusive item there is an electric gear pump, a pressure switch and an electronic board that automatic switches off the pump once the tank is empty.



VACUBOX



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0500B00	10	22	295X295X325	11,6X11,6X12,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

DIMENSIONS

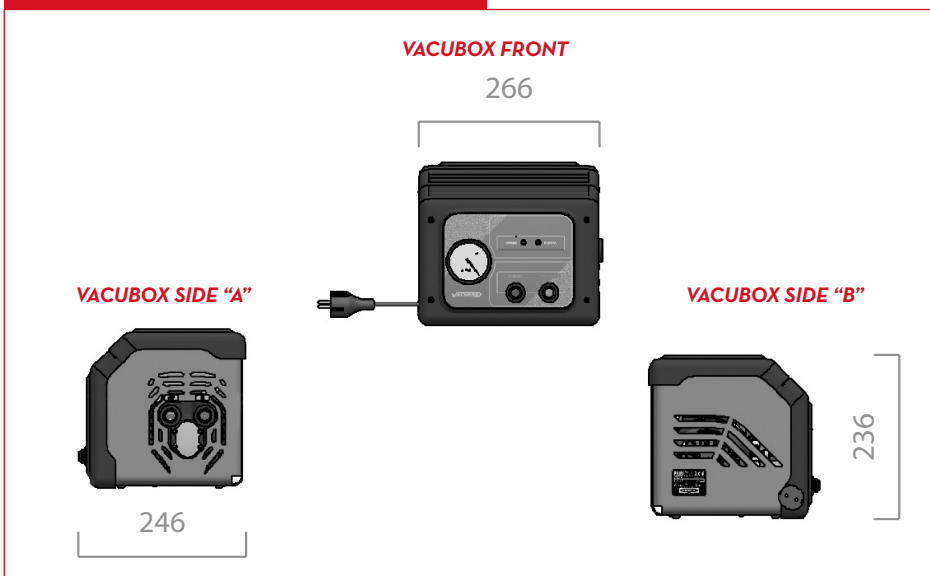

IN THE BOX

- VACUBOX
- INSTRUCTION MANUAL

DETAILS



MATERIALS

- PUMP BODY: CAST IRON
- PUMP GEARS: BRONZE
- SHAFT: STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			INTLET
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.	BSP
FO0500B00	VACUBOX		1 - 10	0,25 - 2,5	230/50	350	2	1/2"

AVAILABLE AT 110-120 V / 60 HZ

VACUBOX

WASTE OIL EQUIPMENT

127



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

CAMBIAOLIO

FEATURES

- IDEAL FOR SMALL WORKSHOPS
- MANAGEABLE
- COMPRESSED AIR NOT REQUIRED
- 6 SUCTION PROBES INCLUDED
- VERSATILE
- DEPRESSION INDICATOR
- 5 METERS OF CABLE
- GRADUATED COLLECTION TANK
- EASY TO EMPTY

PERFORMANCE

up to
10 L
(up to 3 gpm)

TANK CAPACITY

continuous in
AC/DC
operation

VOLTAGE

below
70 dB

NOISE LEVEL

EN.

The CAMBIAOLIO is the traditional offer that Piusi provides for a perfect oil change without the need of compressed air. This small device comes on a trolley that make it transportable everywhere.



CAMBIA OLIO



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
F0050000B	19,5	43	600X290X300	23,6X11,4X11,8		1
O0050006A	19,5	43	600X290X300	23,6X11,4X11,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER




WINDSCREEN

DIMENSIONS

CAMBIA OLIO SIDE

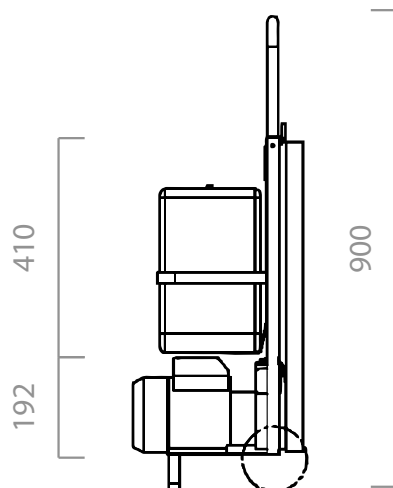

CAMBIA OLIO FRONT

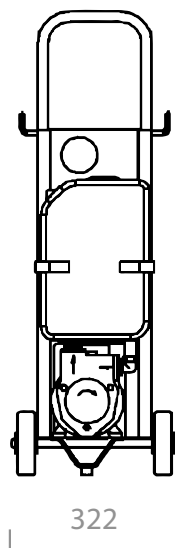

IN THE BOX

- CAMBIAOLIO
- INSTRUCTION MANUAL

DETAILS



PRESSURE GAUGE



TANK 10 LITER



ON/OFF SWITCH

MATERIALS

- PUMP BODY: CAST IRON
- PUMP GEARS: BRONZE
- SHAFT: STEEL

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			TANK	
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.	LITER	GAL
FO050000B	CAMBIAOLIO M		2 - 10	0,5 - 2,5	230/50-60	350	2	10	3
00050006A	CAMBIAOLIO 120V / 60 HZ		2 - 10	0,5 - 2,5	120/60	1200	12,7	10	3

CAMBIAOLIO

WASTE OIL EQUIPMENT

129




ELECTRIC OIL DRAINER

ACCESSORIES

VACUBOX

KIT PROBES	CODE	DESCRIPTION	LENGHT (M)	Ø (MM)
	R08309000	1 SEMI-RIGID PROBE	800	6
		1 SEMI-RIGID PROBE	800	8
		1 RIGID PROBE	800	5
		1 RIGID PROBE	800	8

KIT PROBES	CODE	DESCRIPTION	LENGHT (M)	Ø (MM)
	F11774010	1 SEMI-RIGID	1000	8X6
		1 SEMI-RIGID	1000	6X4

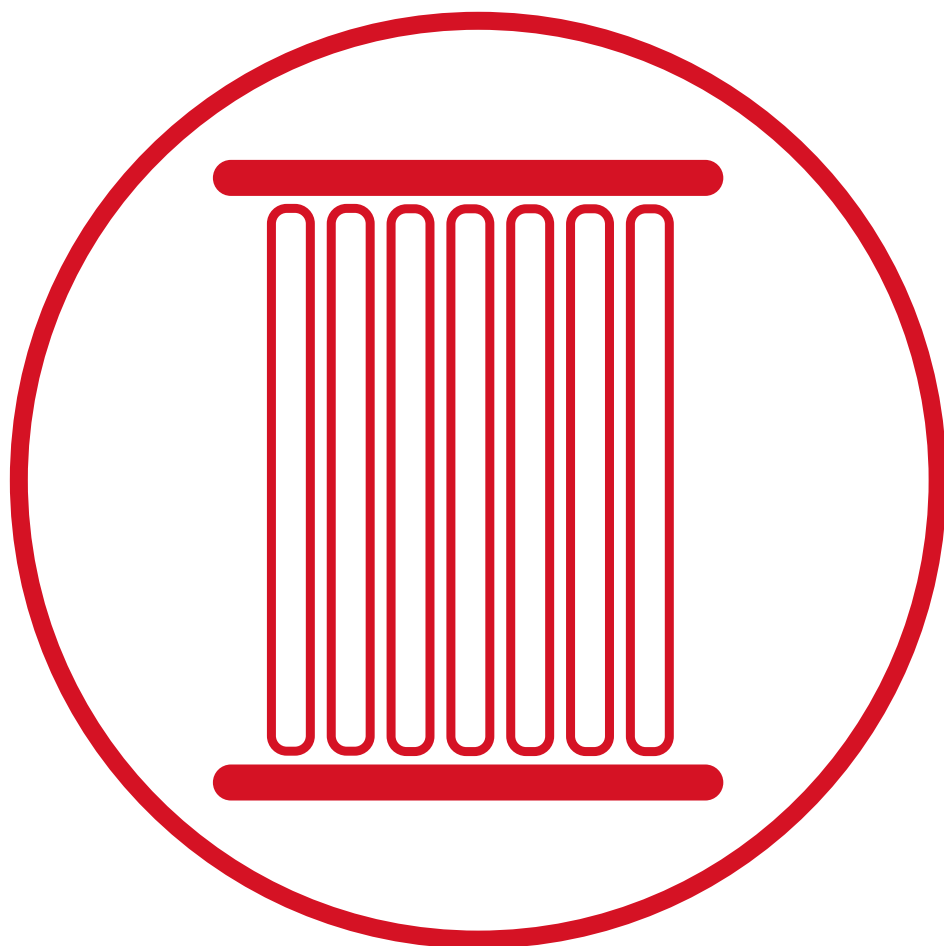

FILTERING



PIUSI
PRODUCT
PLUS

MOBILE FILTERING UNITS



PORTABLE

**WIDE RANGE
OF APPLICATION**

**IDEAL FOR
OIL DIALYSIS**

**ALL-IN-ONE
PRODUCTS**

**CLOGGING FILTER
INDICATOR**

CARTRIDGE FILTERS



**FLANGED
FILTERHEAD**

**WATER
ABSORBER**

**SPIN ON
FILTER**

**PARTICLE
ABSORBER (5-130μ)**



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

DEPUROIL

FEATURES

- IDEAL FOR DIALYSIS OF OIL
- COMPACTNESS
- SILENT
- CLOGGING INDICATOR
- 5 METERS OF CABLE
- SPIRAL TUBES

PERFORMANCE

up to
50 L
(up to 13 gpm)
TANK CAPACITY

continuous in
AC 230 V
operation
VOLTAGE

EN.

The Piusi DEPUROIL is an immediate mobile filtering unit, the easiest solution to a single step filtration suitable for any kind of tank. It includes the Piusi Viscomat Vane pump, suitable for low/medium viscosity lubricants.



DEPUROIL



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
00050300A	28	61,7	600X290X300	23,6X11,4X11,8		1
FO050302C	28	61,7	600X290X300	23,6X11,4X11,8		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

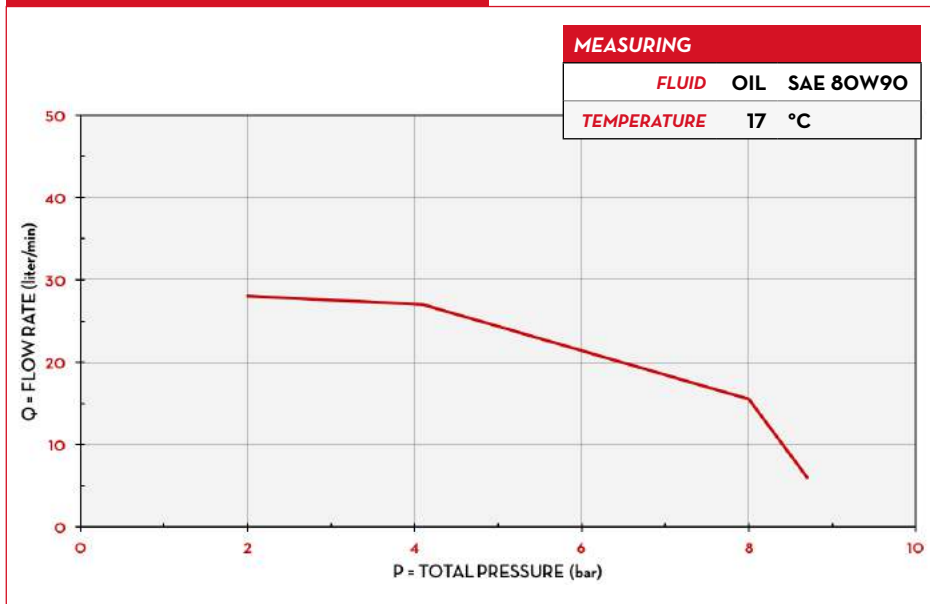

IN THE BOX

- DEPUROIL
- FILTER CARTRIDGE
- SUCTION HOSE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS



TWO STEP FILTRATION




STURDY STRUCTURE



LARGE DIAMETER WHEELS

DIMENSIONS

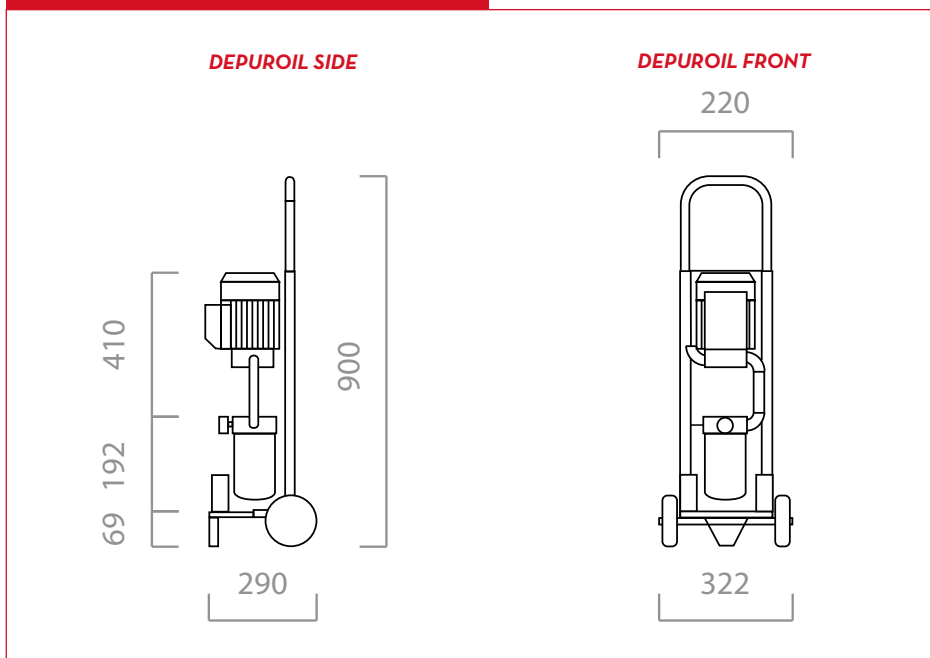

MATERIALS

- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VAINS: TECHNOPOLYMER
- SHAFT: STEEL
- FILTER: ABSORBENT FILTERING PAPER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	HOSE LENGHT		FILTERING CAPACITY
			L/MIN	GPM	AC V/HZ DC VOLT	POWER WATT	AMP. MAX.		DELIVERY M/FT	SUCTION M/FT	
00050300A	DEPUROIL M 230/50		20-25	5,28-6,6	230/50	1350	6,2	VISCOMAT 70	2 / 6,5	2 / 6,5	10
FO050302C	DEPUROIL 110/50-120/660		25	6,6	110/50-120/60	820/850	10-9	VISCOMAT 70	2 / 6,5	2 / 6,5	10
FO0503100	DEPUROIL 60		50	13	230/50	1350	6,2	VISCOMAT 90	2	2	10

DEPUROIL

FILTERING

137



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

FILTROLL

FEATURES

- **DOUBLE-STAGE FILTRATION**
- **CLOGGING INDICATOR**
- **TRANSPORTABLE**
- **MANAGEABLE**
- **SPIRAL TUBES**

PERFORMANCE

up to

56 L

(up to 15 gpm)

TANK CAPACITY

continuous in

AC 230 V

operation

VOLTAGE

DC version

30 MIN

only for Diesel

DUTY CYCLE

EN.

The Piusi FILTROLL is an innovative solution that allows the user to perform a circular filtering of any kind of tanks. The built in trolley lets the operator to easy handle this device in any condition.



FILTROLL OIL/DIESEL



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0506010	42	92,6	790X590X590	31,1X23,2X23,2		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

CHARTS

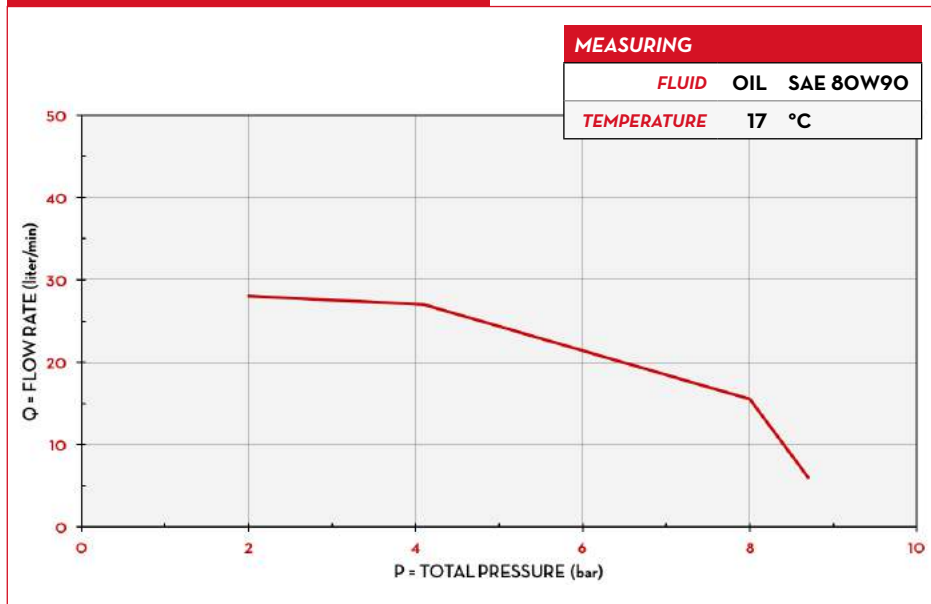

IN THE BOX

- FILTROLL UNIT
- SUCTION HOSE
- DELIVERY HOSE
- INSTRUCTION MANUAL

DETAILS



TWO STEP FILTRATION



STURDY STRUCTURE




LARGE DIAMETER WHEELS

MATERIALS


- BODY: CAST IRON
- ROTOR: SINTERED STEEL
- VAINS: TECHNOPOLYMER
- SHAFT: STEEL
- FILTER: ABSORBENT FILTERING PAPER

DIMENSIONS


FILTROLL FRONT

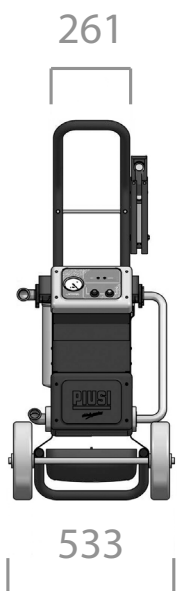

FILTROLL BACK

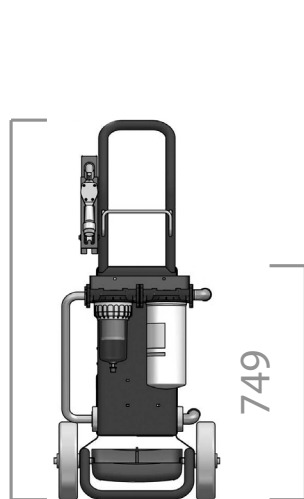

FILTROLL SIDE

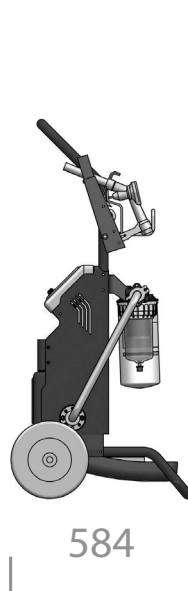

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE			PUMP	HOSE LENGHT	
			L/MIN	GPM	AC V./HZ DC VOLT	POWER WATT	AMP. MAX.		DELIVERY M/FT	SUCTION M/FT
FO0506010	FILTROLL OIL/DIESEL	D O	25	7	230/50	750	4,6	VISCOMAT 70	3 / 9,8	3 / 9,8

FILTROLL

FILTERING

139



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

FUEL & OIL FILTERS

FEATURES

- READY TO USE
- REPLACEABLE CARTRIDGE
- HIGH EFFICIENCY
- SMALL SIZE

PERFORMANCE

2 β

EFFICIENCY

12 BAR

PRESSION

5-10

MICRON

EFFICIENCY

EN.

The line filters with spin on cartridges are suitable to be used on both the suction and delivery side of lubricating systems. They are available in 3/4" and 1" inch fittings.



100 L/MIN FILTER WITH HEAD



PACKAGING

CODE	PRODUCT DIMENSIONS					PACKAGING			
	A MM	B MM	C MM	D MM	F	WEIGHT KG	DIMENSIONS MM	CATRIDGE PCS/BOX	FILTER HEAD PCS/BOX
FILTER FOR FUEL AND OIL									
F0777200A	-	100	160	98	-	1	200X120X140	1	1
F0914900A	-	171	236	132	-	2,6	390X285X140	1	1
F09149020	-	171	236	132	-	2,6	390X285X140	1	1
F00611000	145	-	-	98	3/4" BSP	-	-	1	-
F09359000	180	-	-	132	1"1/4 BSP	-	-	1	-
F09359010	180	-	-	132	1"1/4 BSP	-	-	1	-
F16483010	139	-	-	93	-	9,2	500X300X200	15	-
F14528000	-	100	-	-	3/4" BSP	-	-	-	1
F15743000	-	171	-	-	1"1/2-16 UNF 1"1/4 BSP	-	-	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

FILTERS



100 L/MIN FILTER



60 L/MIN FILTER


IN THE BOX

- FILTER CARTRIDGE
- INSTRUCTION MANUAL

MATERIALS

- FILTER: ABSORBENT FILTERING PAPER

DIMENSIONS

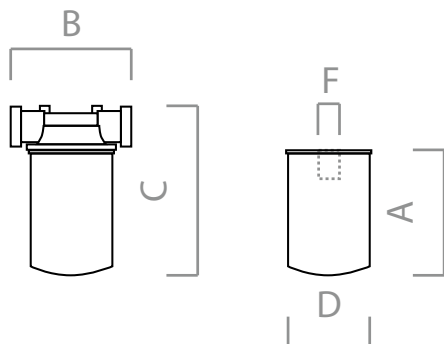

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET/OUTLET	WATER ABSORBING	EFFICIENCY	MICRO	PRESSION
			L/MIN	GPM					
					BSP		B		BAR
FILTER FOR FUEL AND OIL									
FO777200A	60 L/MIN FILTER WITH HEAD	B D G O	60	15,9	1"	NO	2	10	12
FO914900A	100 L/MIN FILTER WITH HEAD	B D G O	100	26,4	1"	NO	2	10	12
FO9149020	100 L/MIN FILTER WITH HEAD	B D G O	100	26,4	1"	NO	2	5	12
FO0611000	CARTRIDGE 60 L/MIN	B D G O	60	15,9	-	NO	2	10	12
FO9359000	CARTRIDGE 100 L/MIN	B D G O	100	26,4	-	NO	2	10	12
FO9359010	CARTRIDGE 100 L/MIN	B D G O	100	26,4	-	NO	2	5	12
F16483010	KIT CARTRIDGE 60 L/MIN 15 (PCS)	B D G O	60	15,9	-	NO	2	10	12
F14528000	FILTER HEAD 3/4 BSP 60 L/MIN		-	-	1"	NO	-	-	-
F15743000	FILTER HEAD 100 L/MIN		-	-	1"	NO	-	30	-

FUEL&OIL FILTERS

FILTERING

141



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

WATER CAPTOR

FEATURES

- READY TO USE
- REPLACEABLE CARTRIDGE
- HIGH EFFICIENCY
- SMALL SIZE

PERFORMANCE

200 β

EFFICIENCY

3,5 BAR

PRESSION

30
MICRON

EFFICIENCY

AVAILABLE for
OIL
for low pressure

FLUIDS TYPE

EN.

The Water Captor is a water absorbing filter, it absorbs all the eventual water particles present in the fluid. They are available in 1" inch fitting.



150 L/MIN WATER CAPTOR
with water absorbing



PACKAGING

CODE	PRODUCT DIMENSIONS					PACKAGING			
	A MM	B MM	C MM	D MM	F	WEIGHT KG	DIMENSIONS MM	CATRIDGE PCS/BOX	FILTER HEAD PCS/BOX
WATER CAPTOR									
FOO611A00	-	100	280	95	-	2,4	390X285X140	2	1
FOO611A10	-	171	340	120	-	2,3	390X285X140	1	1
FOO611010	220	-	-	95	1"-12 UNF	9,8	420X320X250	12	-
FOO611020	275	-	-	120	1 1/2"-16 UNF	9,7	350X350X360	6	-
F14640000	-	100	-	-	1"-12 UNF	-	357X357X275	-	50
F15743000	-	171	-	-	1 1/2"-16 UNF 1 1/4 BSP	0,9	200X120X240	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

FILTERS



150 L/MIN WATER CAPTOR
with water absorbing



70 L/MIN WATER CAPTOR
with water absorbing


IN THE BOX

- FILTER CARTRIDGE
- INSTRUCTION MANUAL

MATERIALS

- FILTER: ABSORBENT FILTERING PAPER

DIMENSIONS

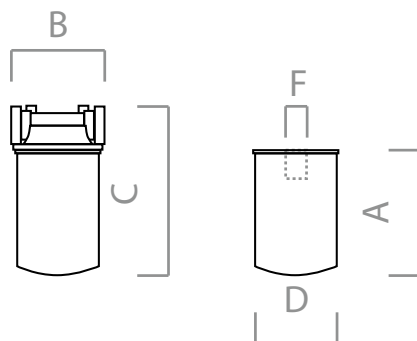

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET/OUTLET	WATER ABSORBING	EFFICIENCY	MICRO	PRESSION
			L/MIN	GPM					
					BSP		B		BAR
WATER CAPTOR									
FOO611A00	70 L/MIN GAS WITH HEAD	D G O	70	18,5	1"	YES	200	30	3,5
FOO611A10	150 L/MIN GAS WITH HEAD	D G O	150	39,6	1"	YES	200	30	3,5
FOO611O10	CARTRIDGE 70 L/MIN WATER SEPARATOR	D G O	70	18,5	-	YES	200	30	3,5
FOO611O20	CARTRIDGE 150 L/MIN WATER SEPARATOR	D G O	150	39,6	-	YES	200	30	3,5
F14640000	FILTER HEAD UNF 70 L/MIN		-	-	1"	NO	-	-	-
F15743000	FILTER HEAD 100 L/MIN		-	-	1"	NO	-	-	-

WATER CAPTOR

FILTERING

143



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

CLEAR CAPTOR

FEATURES

- **READY TO USE**
- **REPLACEABLE CARTRIDGE**
- **HIGH EFFICIENCY**
- **SMALL SIZE**

PERFORMANCE

up to
200 β

EFFICIENCY

5 BAR

PRESSION

5-125
MICRON

EFFICIENCY

AVAILABLE for
OIL
for low pressure

FLUIDS TYPE

EN.

The Clear Captor is a cartridge filter that includes a transparent container and a removable inner cartridge. It is available with paper filter that allows a water absorbing feature.



**CLEAR CAPTOR WATER FILTER
WITH WATER ABSORBING**



PACKAGING

CODE	PRODUCT DIMENSIONS					PACKAGING			
	A MM	B MM	C MM	D MM	F	WEIGHT KG	DIMENSIONS MM	CATRIDGE PCS/BOX	FILTER HEAD PCS/BOX
CLEAR CAPTOR									
FOO611B00	-	171	270	-	-	2,3	390X285X140	2	1
FOO611B10	-	171	270	-	-	2,0	390X285X140	2	1
FOO611B60	-	171	270	-	-	2,3	390X285X140	1	1
FOO611O30	110	-	-	75	1" BSP M	1,9	190X190X240	6	-
FOO611O40	155	-	-	75	1" BSP M	1,2	190X190X240	6	-
FOO611O60	110	-	-	75	1" BSP M	0,2	190X190X240	1	1
F15744000	-	171	-	-	1" BSP F	1,0	200X120X240	-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

FILTERS



clear captor water filter
with water absorbing



clear captor filter



clear captor strainer


IN THE BOX

- FILTER CARTRIDGE
- INSTRUCTION MANUAL

MATERIALS

- FILTER: ABSORBENT FILTERING PAPER

DIMENSIONS

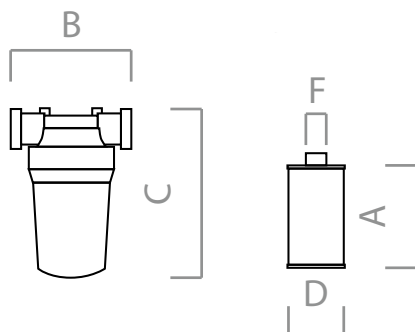

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		INLET/OUTLET	WATER ABSORBING	EFFICIENCY	MICRO	PRESSION
			L/MIN	GPM					
					BSP		β		BAR
CLEAR CAPTOR									
FOO611B00	CLEAR CAPTOR FILTER	B D G O	100	26,4	1"	NO	2	5	5
FOO611B10	CLEAR CAPTOR WATER FILTER	B D G	70	18,5	1"	YES	200	30	5
FOO611B60	CLEAR CAPTOR STRAINER	B D G O	100	26,4	1"	NO	2	125	5
FOO611O30	CLEAR CAPTOR CARTRIDGE	B D G O	100	26,4	-	NO	2	5	-
FOO611O40	CLEAR CAPTOR WATER FILTER CARTRIDGE	B D G	70	18,5	-	YES	200	30	-
FOO611O60	CLEAR CAPTOR STRAINER CARTRIDGE	B D G O	100	26,4	-	NO	2	125	-
F15744000	FILTER HEAD CLEAR CAPTOR		-	-	1"	NO	-	-	-

CLEAR CAPTOR

FILTERING

145



OIL MONITORING

MCO 2.0



OCIO





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

MCO 2.0 SYSTEM

EN.

Over the years we've changed the way we make phone calls, read the news or watch TV. Today, all you need is a smartphone to take photographs and check your bank balance in real time. It has changed the way people communicate, manage and organize information everywhere. And in your workshop? Are you ready to evolve?

The whole world is connected. Now your garage business is too! One of the key points of PIUSI's success is our ability to offer rugged, reliable and easy-to-use tools and equipment. In fact, it's a feature of our organization. With MCO 2.0 we went the extra mile to further improve our garage equipment range by combining all our products in a single system to allow them to intercommunicate freely. Each device, dispenser, or flow meter communicates its status to the entire network. This allows you to create a smoother and more efficient workflow, led by software and devices of a new generation. It's a real revolution capable of bringing a massive injection of innovation into in your garage.

The MCO 2.0 system network's fluid dispensing flows to allow optimal monitoring, while simultaneously offering a comprehensive set of tools and opportunities for the management and organization of each work process. A fully-fledged enterprise resource planning system. Flexible, simple and intuitive. Developed on the basis of your demands, by people involved daily in garage activities seeking practical solutions.

GPV 2.0

PAG. 160

EASYVIEW

PAG. 158

SOFTWARE MCO 2.0

PAG. 152



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN



SOFTWARE MCO 2.0

EASYVIEW

GPV 2.0
(LAN connection available)

CONTROL UNIT 2.0

CONTROL UNIT
MOBILE 2.0

PIUSI DONGLE 2.0

OCIO 2.0

DONGLE 2.0

PAG. 156

OCIO 2.0

PAG. 164

CONTROL UNIT 2.0

PAG. 154



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

SOFTWARE MCO 2.0

FEATURES

- AVAILABLE IN DIFFERENT VERSIONS
- CUSTOMIZED SOLUTIONS
- SUPPORT MULTIPLE BAYS

EN.

PIUSI MCO 2.0 arises from the need to organize your work within your workshop. Starting right from your desk. From your office work station MCO 2.0 Software allows you to enter, display and manage work orders for the entire garage, checking states of completion and deadlines. Thanks to the weekly agenda function, all it takes is a glance.

PERFORMANCE

WI-FI

CONNECTION SYSTEM


USB /WEB

SOFTWARE VERSION

INSTALLATION

DATA MANAGEMENT

Manage customers & vehicles master data

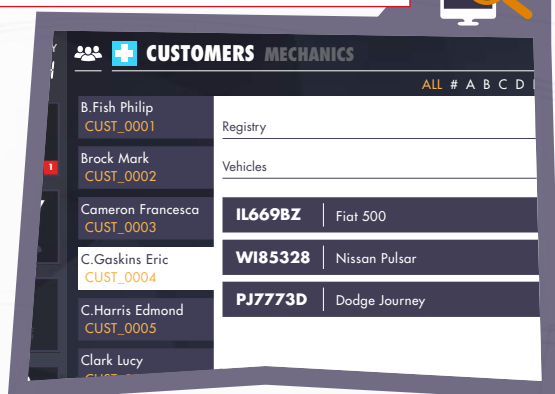

AGENDA

Define a weekly agenda




ALL UNDER CONTROL

Create a new work order



CONTROL WHAT YOU WANT

Select the tasks to include in the work order

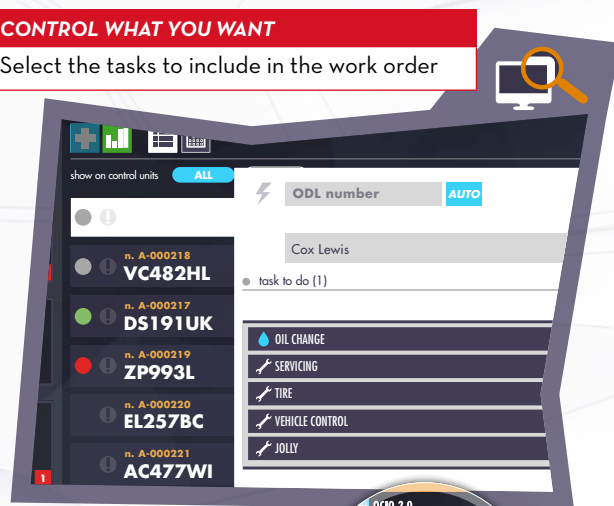



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

access point

PIUSI DONGLE 2.0



SOFTWARE MCO 2.0



CONTROL UNIT
MOBILE 2.0



CONTROL
UNIT 2.0



OCIO 2.0



TICKET PRINTER
WI-FI MCO 2.0



GPV 2.0



EASYVIEW



MCO 2.0 is a server based system. This means that different people and **multiple terminals can manage the organization**, while remaining constantly synchronized. **Already got a DMS to manage your work orders?** No problem: MCO 2.0 will interface easily with your legacy application and remain synchronized with the data so you can continue to exploit the functions of both applications.

TECHNICAL DATA

CODE	DESCRIPTION	CONNECTION
FO0774000	MCO 2.0 CLIENT SOFTWARE (USB VERSION)	/
FO0774010	MCO 2.0 BUSINESS ENTRY SOFTWARE (USB VERSION)	/
FO0774020	MCO 2.0 BUSINESS SUITE SOFTWARE (USB VERSION)	/
FO0774200	MCO 2.0 CLIENT SOFTWARE (WEB EDITION)*	/
FO0774210	MCO 2.0 BUSINESS ENTRY SOFTWARE (WEB EDITION)	/
FO0774220	MCO 2.0 BUSINESS SUITE SOFTWARE (WEB EDITION)*	/

(*) THE PURCHASE OF ADDITIONAL CLIENT LICENSES ENABLES YOU TO USE THE VARIOUS VERSIONS OF MCO 2.0 ON MULTIPLE WORKSTATIONS

SOFTWARE MCO 2.0

OIL MONITORING

153



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

CONTROL UNIT

FEATURES

- **RUGGED CASE** (mobile version)
- **TOUCHSCREEN DISPLAY**
- **READY TO USE**
- **WALL-KIT AVAILABLE**

PERFORMANCE

LAN / WI-FI

CONNECTION SYSTEM

TOUCH SCREEN

DISPLAY

100-240

Volt

VOLTAGE

EN.

The Control Unit 2.0 is the MCO2.0 system Operator interface, it is available in 2 different version, Mobile and Fixed. It allows to scroll through the Word Orders list which is constantly updated by the system.



WORK PLAN

The touchscreen device allows the operator to **scroll through the tasks list**, which is constantly updated in real time. Particularly urgent **work orders** can be highlighted.

PIN NUMBER

To **identify the operator** who is performing a task at any time.

MANAGEMENT

| With just a click the operator can **accept the work task**, displaying all the details and specifying, if necessary, **which fluid** will be used and the **preset quantity**. On completion, each work task is closed and recorded.



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0776010	2,2		390X290X140		-	1
FO077600B	2,9		390X290X140		-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

CAMERA

Document the repairs with notes and photos.

TASK SELECTION

All data relating to the task are displayed on **one line**.

FLEXIBILITY

The operators can add work **orders and tasks directly** from the Control Units 2.0, making use of the flexible system and **keeping track** of every action taken.

IN THE BOX

- CONTROL UNIT
- INSTRUCTION MANUAL

DETAILS



RUBBER PROTECTION



TOUCHSCREEN DISPLAY



HEAVY DUTY DESIGN



Control Unit 2.0 is available in a **wall-mounting** version or in the **Mobile Control Unit 2.0** version. All work orders and task information are optional, in order **to enable an operation in a few seconds**.



SOFTWARE MCO 2.0



GPV 2.0
(LAN connection available)



EASYVIEW



CONTROL UNIT 2.0



CONTROL UNIT
MOBILE 2.0



PIUSI DONGLE 2.0



OCIO 2.0



TECHNICAL DATA

CODE	DESCRIPTION	VOLTAGE	CONNECTION
FO0776010	CONTROL UNIT MOBILE 2.0	100 - 240 V 50 - 60 HZ	WI-FI
FO077600B	CONTROL UNITE 2.0	100 - 240 V 50 - 60 HZ	WI-FI / LAN

CONTROL UNIT

OIL MONITORING

155



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

DONGLE

FEATURES

- NO POWER NEEDED
- 3 MODE OF OPERATIONS

PERFORMANCE

WI-FI

CONNECTION

HDMI

MONITOR CONNECTION

EN.

The Piusi Dongle 2.0 is a remote Wifi device that, once connected to a Monitor, becomes a remote display of the MCO2.0 system showing all the activities in real time.


SUPERVISION

PIUSI Dongle 2.0 is a remote Wi-Fi device that allows simple connection to a normal monitor or TV in order to show all current garage activities in real time.



WORK-ORDERS VIEW

The various possibilities of PIUSI Dongle 2.0 allow you to display either the dispensing operations, work orders and tasks for the day, or the ongoing operations.



FLOW-METER CONTROL

Display each dispensing operation in **real time**. You can select the GPV 2.0 you wish to monitor.

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0776020	0,2		280X130X60		-	1





FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

ALL IN REAL TIME

PIUSI Dongle 2.0 is fully automatic and **displays** the **data** you need in **real time**.

SUPERVISION

Monitor the proper functioning of your GPV 2.0 and tanks.

IN THE BOX

- DONGLE UNIT
- INSTRUCTION MANUAL

CONTROL

Check which **vehicles** are **undergoing** repairs during the day and which tasks are required.

MAXIMUM COMPATIBILITY

PIUSI Dongle 2.0 is **compatible with monitors of any format**, provided they feature an HDMI port.

PENDING-ACTIVE

The “airport” information board view shows **pending work orders** and those in **progress**.



The MCO 2.0 system **supports multiple PIUSI Dongle 2.0 devices**. You can use a large size monitor to **display work tasks** in a central area at your premises, with other smaller monitors installed in each work area to **keep track of dispensing operations**.



TECHNICAL DATA

CODE	DESCRIPTION	CONNECTION
FO0776020	PIUSI DONGLE	WI-FI

DONGLE

OIL MONITORING

157



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

EASY VIEW

FEATURES

- **BALANCED VALVE**
- **LIGHT PRESSION LEVER**
- **ERGONOMIC GRAB**
- **BUILT-IN FILTER**
- **BUILT-IN LEVER LOCK**

PERFORMANCE

ZIGBEE

CONNECTION

70 BAR

PRESSURE

up to
30 L/MIN
(up to 7,8 gpm)

FLOW-RATE

EN.

The Piusi Easyview 2.0 is the MCO2.0 version of the Easyoil nozzle. Attached to this manual nozzle, suitable for the delivery of a wide range of oils, there is a remote display that shows the count made by the GPV2.0.

TECHNOLOGY

The key to the dispensing system is the **clear dialogue between GPV 2.0 and the entire MCO 2.0 system**, plus the wireless communication between the GPV 2.0 solenoid valve and the Easyview nozzle. Optimized integration down to the tiniest detail.

ENHANCED ERGONOMICS

The nozzle **design** has been further improved



TECHNOLOGY

Easyview is a **more practical and intelligent nozzle**. The **large size display** shows the dispensing data transmitted on a wireless connection (zigbee) from the associated GPV 2.0. This means the nozzle no longer needs an internal flow meter, resulting in **significant weight reduction and less risk of damage**.

RUGED CONSTRUCTION

High strength and performance are the core **properties** of the Easyview nozzle.



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0779010	1,16		450X180X90		-	1
FO0779000	1,16		450X180X90		-	1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN

CHARTS

MEASURING

FLUID OIL 10W40

TEMPERATURE 23 °C

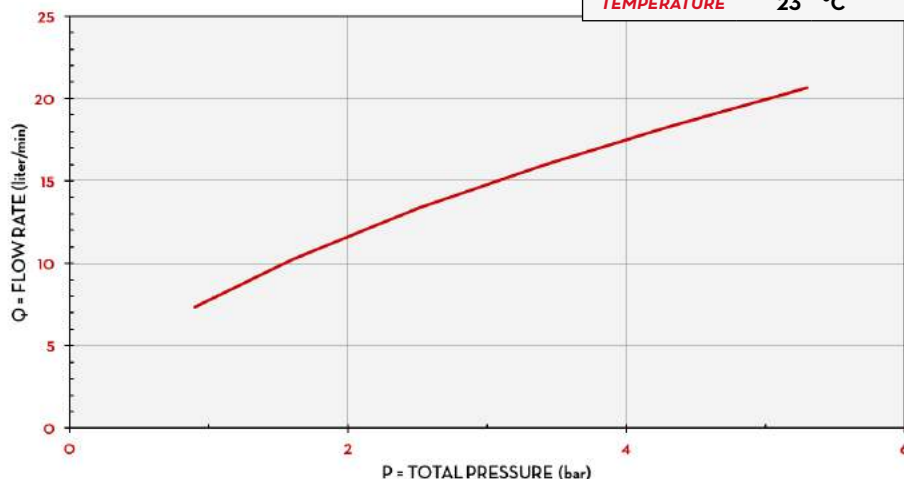

IN THE BOX

- EASY VIEW NOZZLE
- INSTRUCTION MANUAL

DETAILS



1/2" INLET



ALUMINIUM BODY



ANTI-SHOCK HANDGRIP

MATERIALS

- BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS



TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE	CONNECTION	INTLET
			L/MIN		
FOO779010	EASYVIEW RIGID		UP TO 30	ZIGBEE (TO GPV 2.0)	1/2" BSP
FOO779000	EASYVIEW FLEXIBLE		UP TO 30	ZIGBEE (TO GPV 2.0)	1/2" BSP

EASY VIEW

OIL MONITORING

159



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

GPV 2.0

FEATURES

- **READY TO USE**
- **COMPATIBLE WITH ALL FLUIDS (UNIVERSAL VERSION ONLY)**
- **QUICK RETROFIT INSTALLATION**

PERFORMANCE

up to
30 L/MIN

FLOW-RATE

± 0,5%

ACCURACY

LAN/WI-FI

CONNECTION

EN.

The GPV 2.0 is the MCO2.0 version of the well known Piusi GPV. It includes a built in solenoid valve and an oval gear meter, everything in a single device. It is available in several versions based on the fluid you need to control.



WI-FI CONNECTION

GPV 2.0 can be fully controlled remotely.

ENHANCED ERGONOMICS

Designed and built to operate constantly, with no surprises.

PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FOO446010	3		180X180X170		-	1
FOO446000	3		180X180X170		-	1
FOO446060	5,7		350X180X260		-	1
FOO446030	3		180X180X170		-	1
FOO446050	4,3		350X180X260		-	1
FOO44608	4,3		350X180X260		-	1
FOO446070	3		180X180X170		-	1





FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN

CHARTS

MEASURING

FLUID OIL 10W40
TEMPERATURE 23 °C

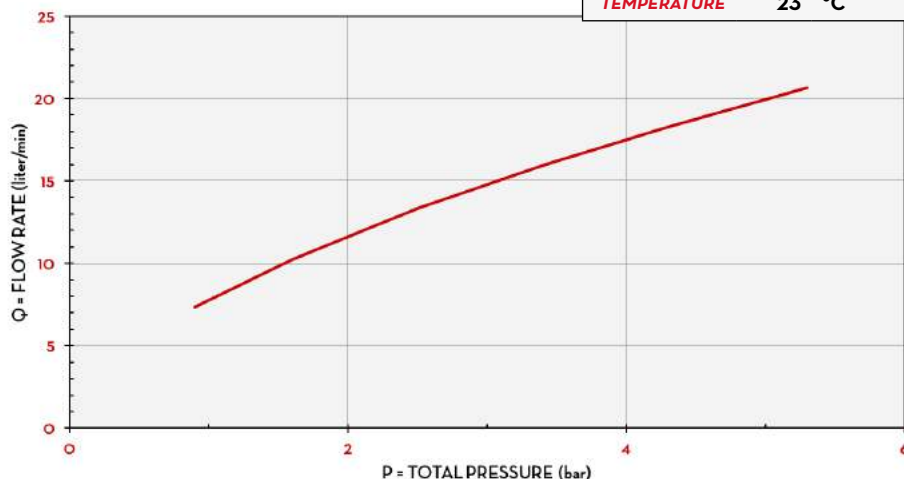

IN THE BOX

- GPV 2.0 UNIT
- INSTRUCTION MANUAL

MATERIALS

- BODY: METAL
- GEARS: TECHNOPOLYMER
- BODY: ALUMINIUM
- VALVE: NBR, NICKEL PLATED STEEL, BRASS



The use of Wi-Fi technology makes the system **far easier to install and expand**, with minimal disruption of your garage activities.



TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	FLOW RATE		VOLTAGE		CONNECTION
			L/MIN	GPM	AC V/HZ	POWER WATT	
FOO446010	GPV 2.0 BI VALVE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446000	GPV 2.0 SINGLE VALVE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446060	GPV 2.0 SINGLE VALVE REMOTE	O	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446030	GPV 2.0 SINGLE VALVE WINDSCREEN	W	30	7,9	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446070	GPV2.0 SINGLE VALVE ADBLUE	Ad	5 - 120	1,3 - 1,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO44608	GPV2.0 SINGLE VALVE DIESEL	D	10 - 100	1,3 - 31,6	100-240 V/ 50-60 HZ	25	WI-FI / LAN
FOO446050	UNIVERSAL VALVE AND PULSER CONTROL	ANY	-	-	100-240 V/ 50-60 HZ	25	WI-FI / LAN

GPV 2.0

OIL MONITORING

161



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

OCIO 2.0

FEATURES

- **READY TO USE**
- **BUILT-IN DISPLAY**
- **ADBLUE® VERSION AVAILABLE**

PERFORMANCE

up to

30

cSt

VISCOSITY

± 1 %

+end off scale

ACCURACY*

LAN / WI-FI

CONNECTION

For



Version

STAINLESS STEEL PROBE

EN.

The OCIO 2.0 is the Piusi's tank level indicator, 100% compatible with the MCO2.0 system. It is available in 2 different versions LAN or Wifi.



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO0755260	2,2	4,8	300X410X100	11,8X16,1X3,9		1
FO0755210	2,2	4,8	300X410X100	11,8X16,1X3,9		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

MCO 2.0 SOFTWARE COMPATIBILITY




IN THE BOX

- OCIO 2.0 UNIT
- LAN/WI-FI ADAPTER
- PROBE
- TUBE
- INSTRUCTION MANUAL

DETAILS



FUNCTIONING

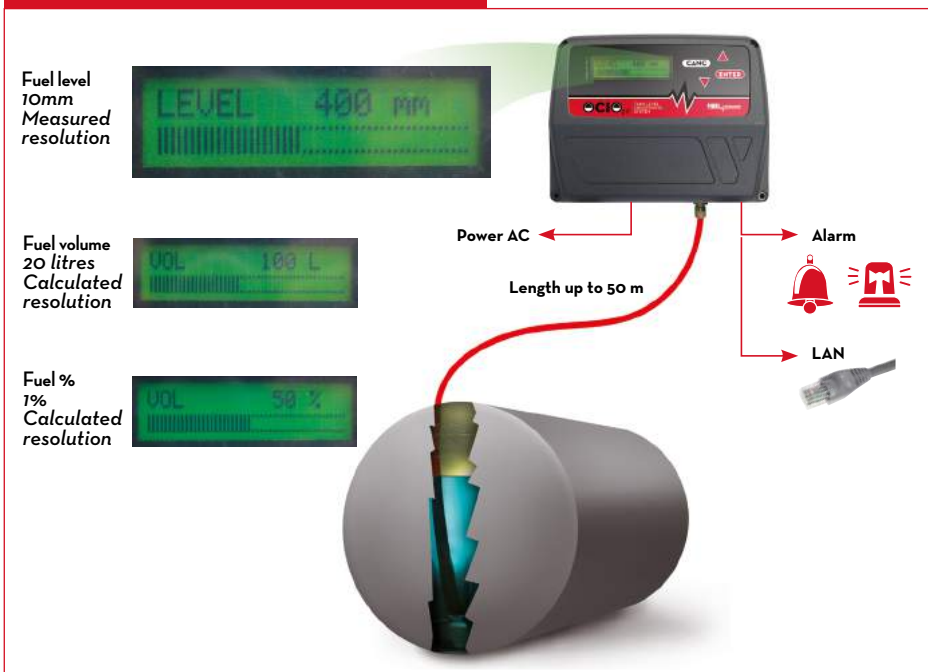

MATERIALS

- PROBE: BRASS
- TUBE: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	VISCOSITY	VOLTAGE	
			CST	AC V/Hz	POWER WATT
FO0755260	OCIO LAN 2.0	A B D O W W U	UP TO 30	230/50	20
FO0755210	OCIO WI-FI 2.0	A B D O W W U	UP TO 30	230/50	20

OCIO 2.0

OIL MONITORING

163



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

OCIO

FEATURES

- **READY TO USE**
- **BUILT-IN DISPLAY**
- **ADBLUE® VERSION AVAILABLE**

PERFORMANCE

up to

30

cSt

VISCOSITY

± 1 %

+end off scale

ACCURACY*

LAN / WI-FI

CONNECTION

For



Version

STAINLESS STEEL PROBE

EN.

The OCIO is the Piusi's tank level indicator.

It is available in 2 different versions LAN or Wifi.



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
FO075510D	2,2	4,8	300X410X100	11,8X16,1X3,9		1
FO075511D	2,2	4,8	300X410X100	11,8X16,1X3,9		1
FO075514O	2,2	4,8	300X410X100	11,8X16,1X3,9		1
FO075516O	2,2	4,8	300X410X100	11,8X16,1X3,9		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER



WINDSCREEN

FUNCTIONING


Fuel level
10mm
Measured
resolution



Fuel volume
20 litres
Calculated
resolution



Fuel %
1%
Calculated
resolution

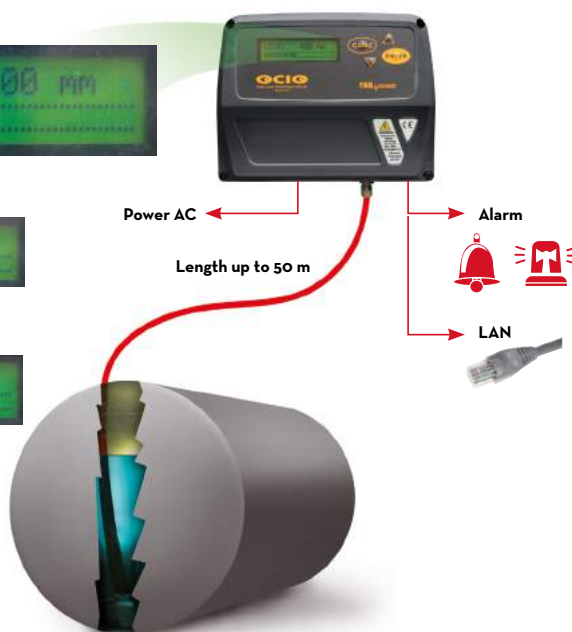

IN THE BOX

- OCIO 2.0 UNIT
- LAN/WI-FI ADAPTER
- PROBE
- TUBE
- INSTRUCTION MANUAL

DETAILS



ADBLUE® PROBE



DISPLAY

MATERIALS

- PROBE: BRASS
- TUBE: TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	RS EXIT	VISCOSITY	VOLTAGE	
				CST	AC V/HZ	POWER WATT
FO075510D	LEVEL INDICATOR OCIO LV/RS OUTPUT	A B D O W W U		UP TO 30	230/50	20
FO075511D	LEVEL INDICATOR OCIO LV/RS OUTPUT 120 V	A B D O W W U		UP TO 30	120/60	20
FO075514O	OCIO UREA	U		UREA	230/50	20
FO075516O	LEVEL INDICATOR OCIO LV/ 4/20 mA OUTPUT	A B D O W W U		UP TO 30	230/50	20

OCIO

OIL MONITORING

165



OIL MONITORING ACCESSORIES

GPV


WALL KIT

CODE

DESCRIPTION

F19914000

WALL KIT



OCIO SYSTEM

OIL KIT

CODE	DESCRIPTION	LENGHT (M)	Ø (MM)
------	-------------	------------	--------

F12939000	OIL KIT	3	12
-----------	---------	---	----



OCIO DESK SOFTWARE

CODE	DESCRIPTION
------	-------------

F15611000	STAINLESS STEEL PROBE
-----------	-----------------------





HOSE REELS

PIUSI PRODUCT PLUS

OPEN



SUITABLE FOR
ANY KIND OF
INSTALLATION

ANTI CORROSIVE
TREATMENT

ADJUSTABLE ARM

FOUR WHEELS
HOSE GUIDES

BALL BEARING
SUPPORT

CLOSED



SUITABLE FOR
ANY KIND OF
INSTALLATION

ANTI CORROSIVE
TREATMENT

ADJUSTABLE ARM

FOUR WHEELS
HOSE GUIDES

BALL BEARING
SUPPORT





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

OIL OPEN HOSE REEL

FEATURES

- **HEAVY DUTY SPRING**
- **HAND PROTECTION (ON REQ.)**
- **WIDE RANGE OF PRODUCTS**
- **LONG LASTING**
- **STEEL HUB**

PERFORMANCE

max
60 BAR

OPERATING PRESSURE

max
20 M
bound

HOSE LENGTH

EN.

The Piusi OPEN HOSE REEL for oil, entirely Made in Italy, includes a built-in heavy duty spring. It can be installed on a wall or inside a closed cabinet, suitable for any kind of oil.



HOSE REEL OPEN for OIL



PACKAGING

CODE	WEIGHT		PACKAGING			N. BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX		
WITHOUT HOSE							
HN60151200A	14	30,8	550X200X540		1	12	20
HN60153800A	14	30,8	550X200X540		1	12	20
HN60201200A	14	30,8	550X260X540		1	12	20
WITH HOSE							
HA6010120B	16	35,2	550X200X540		1	12	20
HA6015120B	19	41,9	550X200X540		1	12	20
HA60201200A	25	55	550X260X540		1	12	20
HA60153400A	27	60	550X260X540		1	12	20
HA60101000A	25	55	550X260X540		1	12	20



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN


INSTALLATIONS

Different ways to install PIUSI's hose reels: in every situation you can easily place wherever you need your product with any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any conditions.


ROOF INSTALLATION



WALL INSTALLATION



GROUND INSTALLATION




DIMENSIONS

MODEL OPEN HOSE REEL BIG OPEN HOSE REEL SMALL

A	495	475
B	460	460
C	152	102
D	200	150
E	246	196
F	150	150
G	200	150
H	12	12

HOSE REEL FRONT / SIDE

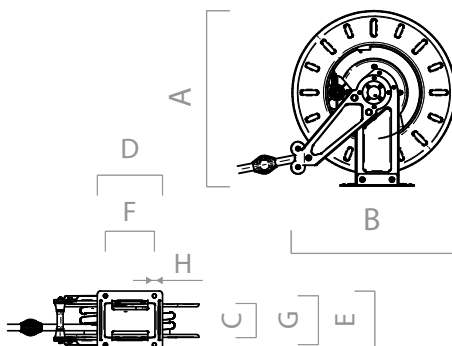

IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

DETAILS



4 ROLLS HOSE GUIDE



AUTOMATIC HOSE REELS



DIFFERENT INSTALLATIONS



STURDY DESIGN

MATERIALS

- BODY: CAST IRON
- HUB: SYNTHETIC STEEL
- TUBE: RUBBER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX OPERATING PRESSURE	PRESSURE DROP	INTLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	M	M
WITHOUT									
HN60151200A	OPEN HOSE REEL 1/2" 15MT SMALL		1/2"	60	-	1/2" MALE	1/2" MALE	15	-
HN60153800A	OPEN HOSE REEL 3/8" 15MT SMALL		3/8"	60	-	3/8" FEMALE	3/8" FEMALE	15	-
HN60201200A	OPEN HOSE REEL 1/2" 20MT BIG		1/2"	60	-	1/2" MALE	1/2" MALE	20	-
WITH HOSE									
HA6010120B	OPEN HOSE REEL 1/2" + 10MT HOSE SMALL		1/2"	60	10 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	10
HA6015120B	OPEN HOSE REEL 1/2" + 15MT HOSE SMALL		1/2"	60	16 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	15
HA60201200A	OPEN HOSE REEL 1/2" + 20MT HOSE BIG		1/2"	60	25 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	20
HA60153400A	OPEN HOSE REEL 3/4" + 15MT HOSE BIG		3/4"	60	4,5 @ 30 L/MIN*	1" MALE	3/4" MALE	-	15
HA60101000A	OPEN HOSE REEL 1" + 10MT HOSE BIG		1"	60	2 @ 30 L/MIN*	1" MALE	1" MALE	-	10

(*) PRESSURE DROP FOR OIL 200 CST

OIL HOSE REEL

HOSE REEL

173



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

GREASE OPEN HOSE REEL

FEATURES

- **HEAVY DUTY SPRING**
- **HAND PROTECTION (ON REQ.)**
- **WIDE RANGE OF PRODUCTS**
- **LONG LASTING**
- **STEEL HUB**
- **HIGH PRESSURE**

PERFORMANCE

max

400 BAR

OPERATING PRESSURE

max

15 M

bound

HOSE LENGTH

EN.

The Piusi OPEN HOSE REEL for grease, manufactured accordingly to the most demanding requirements is suitable for all grease heavy duty applications.



HOSE REEL OPEN for GREASE



PACKAGING

CODE	WEIGHT		PACKAGING		
	KG	LBS	MM	PCS/PALLET	PCS/BOX
WITHOUT HOSE					
HN40151400A	14	30,8	550X200X540		1
HN40153800A	14	30,8	550X200X540		1
WITH HOSE					
HA40151400	27	60	550X260X540		1
HA40153800A	25	55	550X260X540		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN


INSTALLATIONS

Different ways to install PIUSI's hose reels: in every situation you can easily place wherever you need your product with any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any conditions.


ROOF INSTALLATION



WALL INSTALLATION



GROUND INSTALLATION




DIMENSIONS

MODEL OPEN HOSE REEL SMALL

A	475
B	460
C	102
D	150
E	196
F	150
G	150
H	12

HOSE REEL FRONT/SIDE

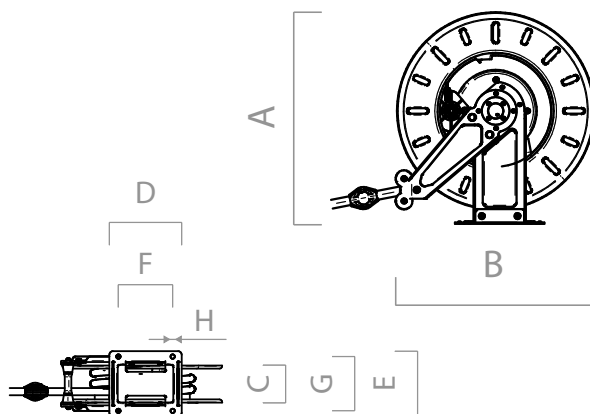

IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

DETAILS



4 ROLLS HOSE GUIDE



STURDY DESIGN



DIFFERENT INSTALLATIONS

MATERIALS

- BODY: CAST IRON
- HUB: SYNTHETIC STEEL
- TUBE: RUBBER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX OPERATING PRESSURE	PRESSURE DROP	INTLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	M	M
WITHOUT HOSE									
HN40151400A	OPEN HOSE REEL 1/4" 15MT SMALL	G	1/4"	400	-	1/4" FEMALE	1/4" FEMALE	15	-
HN40153800A	OPEN HOSE REEL 3/8" 15MT SMALL	G	3/8"	400	-	3/8" FEMALE	3/8" FEMALE	15	-
WITH HOSE									
HA40151400	OPEN HOSE REEL 1/4" + 15MT HOSE SMALL	G	1/4"	400	160 @ 600 GR/MIN*	1/4" FEMALE	1/4" FEMALE	-	15
HA40153800A	OPEN HOSE REEL 3/8" + 15MT HOSE SMALL	G	3/8"	400	140 @ 600 GR/MIN*	3/8" FEMALE	3/8" FEMALE	-	15

(*) PRESSURE DROP FOR GREASE NLGI 2.5 (**) PRESSURE DROP FOR GREASE NLGI 2

GREASE HOSE REEL

HOSE REEL

175



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

AIR/WATER OPEN HOSE REEL

FEATURES

- **STURDY METALLIC STRUCTURE**
- **ANTI-FREEZE VERSION**
- **BENDING PROTECTION**

PERFORMANCE

max
20 BAR

OPERATING PRESSURE

max
15 M
bound

HOSE LENGTH

EN.

The Piusi OPEN HOSE REEL for Air/Water is the perfect solution to manage the dispensing of these kind of liquids/gases. It comes with a sturdy hand protection cover to avoid any possible injury during the proper usage.



HOSE REEL OPEN for AIR/WATER



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
WITH HOSE						
HA20151200A	17	37,4	550X200X540	21,6X7,9X21,3		1
HA20153800A	17	37,4	550X200X540	21,6X7,9X21,3		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN


INSTALLATIONS

Different ways to install PIUSI's hose reels: in every situation you can easily place wherever you need your product with any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any conditions.


ROOF INSTALLATION



WALL INSTALLATION



GROUND INSTALLATION



IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL
- HAND PROTECTION

DETAILS



4 ROLLS HOSE GUIDE



HAND PROTECTION



DIFFERENT INSTALLATIONS



STURDY DESIGN

MATERIALS


- BODY: CAST IRON
- HUB: SYNTHETIC STEEL
- TUBE: RUBBER

DIMENSIONS


MODEL OPEN HOSE REEL SMALL

A	475
B	460
C	102
D	150
E	196
F	150
G	150
H	12

HOSE REEL SIDE



HOSE REEL FRONT

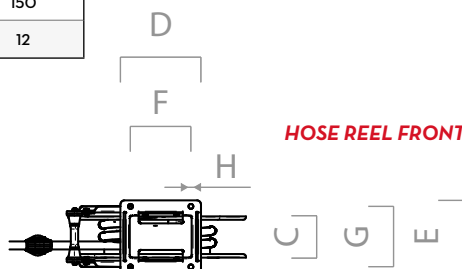

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE (*)	MAX OPERATING PRESSURE	PRESSURE DROP	INTLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	M	M
WITH HOSE									
HA20151200A	OPEN HOSE REEL 1/2" + 15MT HOSE SMALL	  	1/2"		-	1/2" MALE	1/2" MALE	15	15
HA20153800A	OPEN HOSE REEL 3/8" + 15MT HOSE SMALL	  	3/8"		-	3/8" FEMALE	3/8" FEMALE	15	15

AIR / WATER HOSE REEL



OPEN HOSE REELS ACCESSORIES

OIL / GREASE OPEN HOSE REEL

FIX SUPPORT PLATE




CODE	DESCRIPTION	WEIGHT (KG)	PACK
F1629800A	FIX SUPPORT BIG	1,5	300X410X100
F1731600A	FIX SUPPORT SMALL	1,5	300X410X100

ROTATING SUPPORT PLATE



CODE	DESCRIPTION	WEIGHT (KG)	PACK
F1627900A	FIX SUPPORT BIG	3,5	300X300X180
F1731700A	FIX SUPPORT SMALL	3,5	300X300X180

JUNCTION HOSE



CODE	DESCRIPTION
F19973000	JUNCTION HOSE

HAND PROTECTION



CODE	DESCRIPTION
R16745000	CARTER LATO MOLLA
R20982000	CARTER PLASTICA LATO GIUNTO

AIR / WATER OPEN HOSE REEL

FIX SUPPORT PLATE




CODE	DESCRIPTION	WEIGHT (KG)	PACK
F1629800A	FIX SUPPORT BIG	1,5	300X410X100
F1731600A	FIX SUPPORT SMALL	1,5	300X410X100

ROTATING SUPPORT PLATE



CODE	DESCRIPTION	WEIGHT (KG)	PACK
F1627900A	FIX SUPPORT BIG	3,5	300X300X180
F1731700A	FIX SUPPORT SMALL	3,5	300X300X180

JUNCTION HOSE



CODE	DESCRIPTION
F19973000	JUNCTION HOSE



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

OIL CLOSED HOSE REEL

FEATURES

- **STURDY METALLIC STRUCTURE**
- **COMPACT DESIGN**
- **HEAVY DUTY SPRING**
- **LONG LASTING STEEL HUB**

PERFORMANCE

max
60 BAR

OPERATING PRESSURE

max
12 M
bound

HOSE LENGTH

EN.

The Piusi CLOSED HOSE REEL for oil, entirely Made in Italy, is perfect solution for managing the dispense of any kind of lubricants. Its sturdy closed structure makes this equipment ready to be fitted on a wall or into an open cabinet.



HOSE REEL CLOSED for OIL



PACKAGING

CODE	WEIGHT		PACKAGING			N.BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX	✈	🚢
WITH HOSE							
HC6O121200A	19	41,9	55OX20OX540		1	12	20
WITHOUT HOSE							
HNC6O121200	14,5	32,9	55OX20OX540		1	12	20



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN


INSTALLATIONS

Different ways to install PIUSI's hose reels: in every situation you can easily place wherever you need your product with any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any conditions.


ROOF INSTALLATION



WALL INSTALLATION



GROUND INSTALLATION



IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

DETAILS



4 ROLLS HOSE GUIDE



FIX SUPPORT PLATE



SWIVEL

MATERIALS


- BODY: CAST IRON
- HUB: SYNTERED STEEL
- TUBE: RUBBER

DIMENSIONS

MODEL CLOSE HOSE REEL

MODEL	CLOSE HOSE REEL
A	516
B	259
C	491
D	295
E	123
F	90
G	270
H	10,5
I	160

HOSE REEL FRONT / SIDE

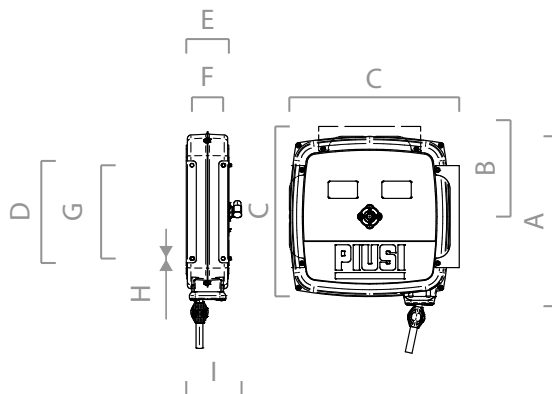

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX OPERATING PRESSURE	PRESSURE DROP	INTLET WITH S WIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	M	M
WITH HOSE									
HA20151200A	OPEN HOSE REEL 1/2" + 12MT HOSE		1/2"	60	10 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	12
WITHOUT HOSE									
HNC60121200	CLOSE HOSE REEL 1/2"			60	10 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	12

(*) PRESSURE DROP FOR OIL 200 CST

OIL CLOSED HOSE REEL

HOSE REEL

181



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

GREASE

CLOSED HOSE REEL

FEATURES

- HEAVY DUTY SPRING
- LONG LASTING STEEL HUB
- HIGH PRESSURE

PERFORMANCE

max

400 BAR

OPERATING PRESSURE

max

12/15 M

bound

HOSE LENGTH

EN.

The Piusi CLOSED HOSE REEL for grease, manufactured accordingly to the most demanding requirements is suitable for all grease heavy duty applications. Its heavy-duty cabinet prevents any possible damage to the inner components and make this reel long lasting.



HOSE REEL CLOSED for GREASE



PACKAGING

CODE	WEIGHT		PACKAGING			N.BOXES/ EUROPALLET	
	KG	LBS	MM	PCS/PALLET	PCS/BOX	✈	🚚
WITHOUT HOSE							
HC40123800A	20	44	550X200X540		1	12	20
HC60121200A	19	41,9	550X200X540		1	12	20
WITH HOSE							
HNC40151400	14,5	32	550X200X540		1	12	20



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN


INSTALLATIONS

Different ways to install PIUSI's hose reels: in every situation you can easily place wherever you need your product with any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any conditions.


ROOF INSTALLATION



WALL INSTALLATION



GROUND INSTALLATION



IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

DETAILS



4 ROLLS HOSE GUIDE



FIX SUPPORT PLATE



SWIVEL

MATERIALS


- BODY: CAST IRON
- HUB: SYNTERED STEEL
- TUBE: RUBBER

DIMENSIONS

MODEL CLOSE HOSE REEL

MODEL	CLOSE HOSE REEL
A	516
B	259
C	491
D	295
E	123
F	90
G	270
H	10,5
I	160

HOSE REEL FRONT / SIDE

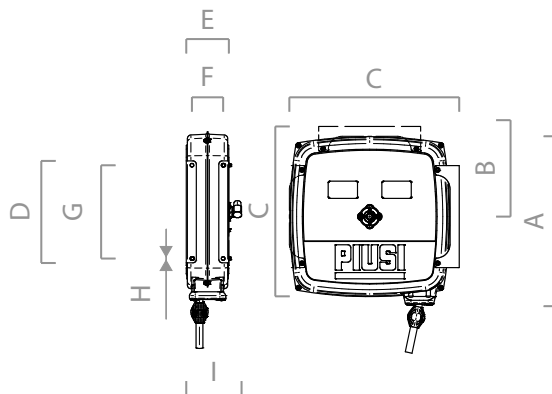

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX OPERATING PRESSURE	PRESSURE DROP	INTLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	M	M
WITHOUT HOSE									
HC40123800A	CLOSE HOSE REEL 3/8"	G	3/8"	400	50@600 GR/MIN**	3/8" MALE	3/8" MALE	-	12
HC60121200A	CLOSE HOSE REEL 1/2"	G	1/2"	60	10 @ 30 L/MIN*	1/2" MALE	1/2" MALE	-	12
WITH HOSE									
HNC40151400	CLOSE HOSE REEL 1/4"	G	1/4"	400	-	1/4" FEMALE	1/4" FEMALE	15	-

(*) PRESSURE DROP FOR GREASE NLGI 2.5 (**) PRESSURE DROP FOR GREASE NLGI 2

GREASE CLOSED HOSE REEL



KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

AIR/WATER CLOSED HOSE REEL

FEATURES

- **STURDY METALLIC STRUCTURE**
- **ANTI-FREEZE VERSION**
- **BENDING PROTECTION**

PERFORMANCE

max
20 BAR

OPERATING PRESSURE

max
12/15 M
bound

HOSE LENGTH

EN.

The Piusi CLOSED HOSE REEL for Air/Water comes with a sturdy metallic cabinet that ensures any possible corruption of the inner components. It is ready to be fitted on the wall or into an open cabinet.



HOSE REEL CLOSED for AIR/WATER



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
WITH HOSE						
HC20121400A	6	13,2	38OX18OX27O	15X7,1X10,6		1
HC201511200A	6	13,2	38OX18OX27O	15X7,1X10,6		1



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®



WATER




WINDSCREEN


INSTALLATIONS

Different ways to install PIUSI's hose reels: in every situation you can easily place wherever you need your product with any problem about functionality and safety. PIUSI's products are without a doubt designed to support your work in any conditions.

WALL INSTALLATION

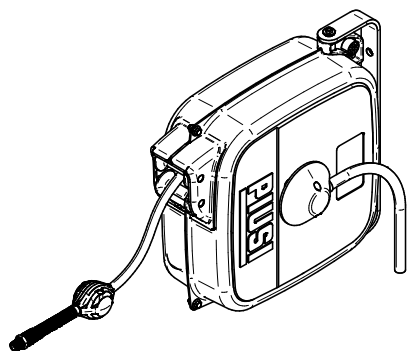

ROOF INSTALLATION

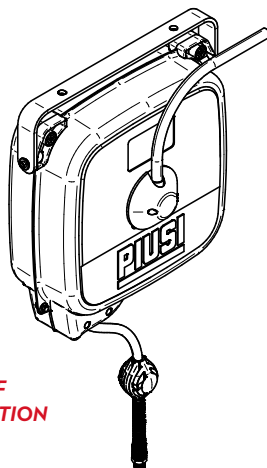

IN THE BOX

- REEL
- WALL MOUNT BRACKET
- INSTRUCTION MANUAL

DETAILS



REVOLVING BRACKET



CONNECTION HOSE



SPRING

MATERIALS


- BODY: CAST IRON
- HUB: SYNTHETIC STEEL
- TUBE: RUBBER

SIZE AND WEIGHT

MODEL CLOSE HOSE REEL

MODEL	CLOSE HOSE REEL	MODEL	CLOSE HOSE REEL
A	374	L	108
B	337	M	79
C	160	N	590
D	30	O	171
E	168.5	P	168
F	205	Q	295
G	312	-	-
H	10.5	-	-
I	187	-	-

HOSE REEL FRONT / SIDE

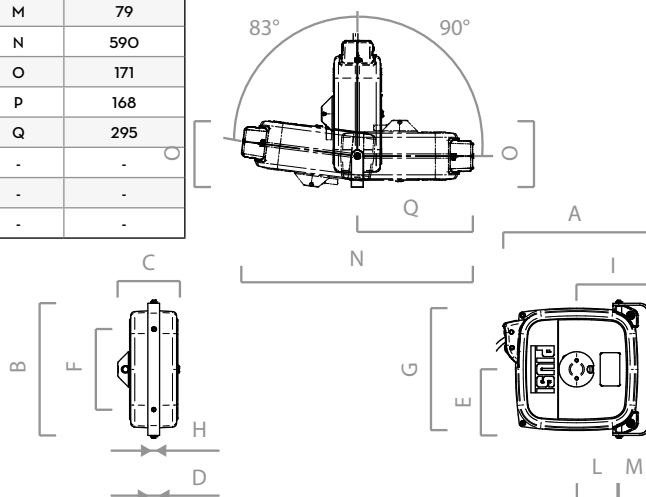

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	HOSE	MAX OPERATING PRESSURE	PRESSURE DROP	INTLET WITH SWIVEL	OUTLET HOSETAIL	HOSE MAX LENGHT BOUND	HOSE LENGHT
			BSP	BAR	BAR	BSP	BSP	M	M
WITH HOSE									
HC20121400A	CLOSE REEL 10X14 + 12MT HOSE	  	10X14	20	-	10 MM	3/4" MALE	-	12
HC201511200A	CLOSE REEL 8X12 + 15MT HOSE	  	8X12	20	-	8 MM	1/4" MALE	-	15

AIR / WATER CLOSED HOSE REEL

HOSE REEL

185



CLOSED
HOSE REELS
ACCESSORIES

OIL CLOSED
HOSE REEL


JUNCTION HOSE

CODE

DESCRIPTION

F19973000

JUNCTION HOSE



GREASE CLOSED HOSE REEL


JUNCTION HOSE


CODE

DESCRIPTION

F19973000

JUNCTION HOSE



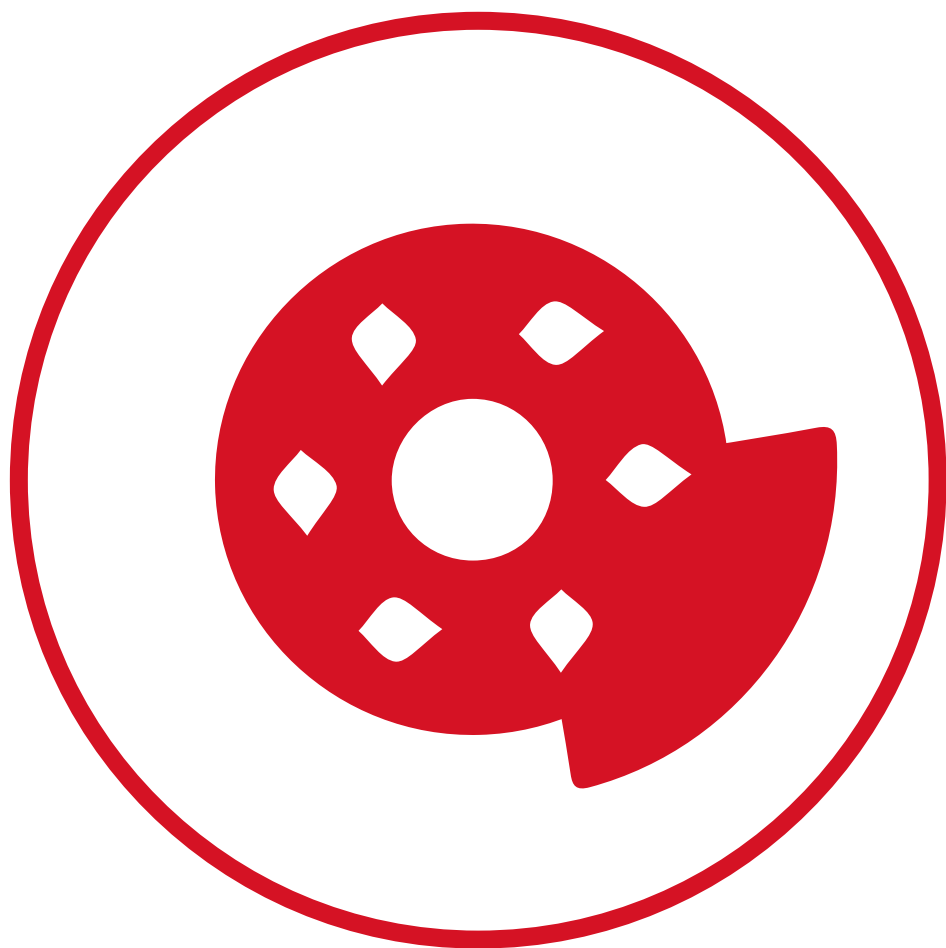

ACCESSORIES



PIUSI
PRODUCT
PLUS

DUMBOX







KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

DUMBOX

FEATURES

- **READY TO USE**
- **EXTREMELY PRECISE**
- **ADJUSTABLE SPOUT**
- **SUITABLE FOR ANY LIQUID**

PERFORMANCE

up to

5 L

CAPACITY

up to

220 MM

Ø

FUNNEL

EN.

The Dumbox is an immediate way to dispense lubricants. Its adjustable spout, which includes a built-in filter, allows a precise refill operation avoiding any spread of fluid.



PACKAGING

CODE	WEIGHT		PACKAGING			
	KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
CONTAINER						
FO0920000	0,8		590X700X575			24
FO09117000	6		510X410X540			24
FO091600A	8		510X410X540			50
FUNNEL						
FO093000A	5,8		405X520X540			24
FO093100A	7,8		405X520X535			50



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE



INDEX



AIR



ANTIFREEZE



BIODIESEL



DIESEL



FOOD



GASOLINE



GREASE



KEROSENE



OIL



AdBlue®




WATER



WINDSCREEN

DIMENSIONS

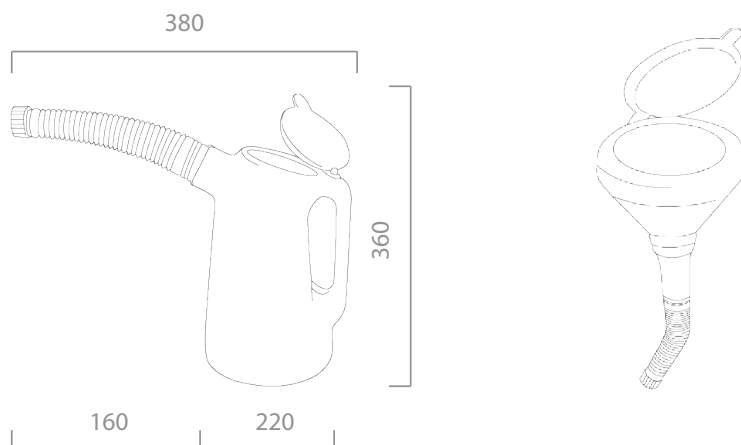

IN THE BOX

- DUMBOX

DETAILS



FLEXIBLE



COVER



CAP



BUILT-IN FILTER

MATERIALS

- TECHNOPOLYMER

TECHNICAL DATA

CODE	DESCRIPTION	FLUIDS TYPE	
WITHOUT HOSE			
FOO920000	CONTAINER 5 LITRES		
FOO917000	CONTAINER 2 LITRES		
FOO91600A	CONTAINER 1 LITRE		
WITH HOSE			
FOO93000A	FUNNEL Ø 180 MM		
FOO93100A	FUNNEL Ø 220 MM		

DUMBOX

ACCESSORIES

193



MERCHANDISE





KIT LUBE



PUMPS



METERS



NOZZLE METERS



NOZZLE



WASTE OIL EQ.

MERCHANDISE



PACKAGING

CODE	DESCRIPTION	WEIGHT		PACKAGING			
		KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
CROWNER							
PBA000013	PIUSI METALLIC FLOOR STAND	76	-	120X100 (PALLET)	-	1	-
T-SHIRT							
PBG000026	PIUSI T-SHIRT BOX 10 PCS - L	1	-	35X26X18	-	-	10
PBG000027	PIUSI T-SHIRT BOX 10 PCS - XL	1	-	35X26X18	-	-	10
PBG000029	PIUSI T-SHIRT BOX 10 PCS - M	1	-	35X26X18	-	-	10



FILTERING



OIL MONITORING



HOSE REEL



ACCESSORIES



MERCHANDISE

PIUSI

INDEX



PACKAGING

CODE	DESCRIPTION	WEIGHT		PACKAGING			
		KG	LBS	MM	INCH	PCS/PALLET	PCS/BOX
POSTER							
PBPOOOO03	KIT POSTERS PIUSI - BOX 10 PCS	0,2	-	70X12	-	-	10
UMBRELLA							
PBG000030	PIUSI UMBRELLA - BOX 10 PCS	5,5	-	35X26X18	-	-	10
BAG							
PBG000024	PIUSI BAG 2017 - BOX 150 PCS	18,5	-		-	-	150

USABLE VISCOSITY CHART (units: cSt = mm²/s)

TYPE OF OIL	-15°C	-10°C	-5°C	0°C	+5°C	+10°C	+15°C	+20°C	+25°C	+30°C	+35°C	+40°C
60 SPINDLE OIL	380	220	130	87	60	40	30	22	17	13		
90 REFRIGERATOR OIL	430	270	280	122	90	65	48	36	28	23		
150 REFRIGERATOR OIL	900	550	330	240	160	110	80	60	46	36		
90 TURBINE OIL	1.100	700	440	290	200	140	100	75	63	40		
150 SPINDLE OIL	2.000	1.000	600	360	230	150	100	75	55	46		
SAE - 10 W	1.150	700	460	300	220	150	110	85	65	36		
ISO 32 AUT. MACHINES OIL	1.800	1.000	600	400	260	180	125	90	70	53		
120 MACHINE OIL	3.000	1.600	1.000	620	400	265	180	130	95	75		
300 REFRIGERATOR OIL	3.300	1.800	1.000	700	420	280	190	130	95	75		
140 TURBINE OIL	3.500	2.000	1.200	750	500	320	240	170	120	95		
SAE - 20	3.500	2.000	1.200	800	530	370	260	190	140	105		
160 MACHINE OIL	4.300	2.500	1.400	900	600	400	285	190	140	105		
ISO 68 LUBRICANT	5.000	2.800	1.700	1.100	650	400	300	210	150	130		
180 TURBINE OIL	5.000	3.000	1.800	1.050	700	460	320	220	160	120		
200 TURBINE OIL	6.500	3.800	2.200	1.300	800	550	360	260	180	135		
SAE - 80 GEAR OIL	7.000	4.000	2.400	1.400	900	600	400	280	200	150		
SAE - 30	9.000	5.000	3.000	1.800	1.150	750	500	340	240	180		
ISO - 100	11.000	5.500	3.200	2.000	1.200	800	500	350	250	180		
SAE - 40		8.000	4.500	2.700	1.600	1.050	720	500	340	250		
ISO - 150	18.000	10.000	5.500	3.200	2.000	1.250	800	550	380	280		
SAE - 90 GEAR OIL			7.000	4.200	2.500	1.800	1.000	700	480	340		
SAE - 50			8.000	5.000	3.000	1.800	1.200	800	530	380		
ISO - 220			10.000	5.500	3.200	2.200	1.300	900	600	420		
SAE - 60				9.000	5.500	3.400	2.000	1.350	900	650		
ISO - 320			17.000	9.500	5.500	3.300	2.100	1.400	900	650		
SAE - 140 GEAR OIL				10.000	6.000	3.800	2.300	1.400	1.000	700		
ISO - 460				14.000	8.000	4.800	3.000	1.900	1.100	900	620	460
ISO - 680					14.000	8.000	5.000	3.000	2.100	1.400	950	680
ISO - 1000						14.000	8.000	5.000	3.100	2.100	1.500	1.000
ISO - 1500							14.000	8.000	5.000	3.100	2.200	1.500

 = VISCOMAT 70
 VISCOMAT 90
 VISCOMAT DC 60/2
 PIUSI P 3.5

 +  = PIUSI P 5.5

 +  +  = VISCOMAT 200/2
 VISCOMAT 230/3
 VISCOMAT 350/2
 VISCOMAT DC 60/1
 VISCOMAT DC 120/1

TYPE of FLUIDS

AIR
A
ANTIFREEZE
A
BIODIESEL
B
DIESEL
D
FOOD
F
GASOLINE
G
GREASE
^RG
KEROSENE
K
OIL
O
AdBlue® (UREA)
U
WATER
W
WINDSCREEN
W
S

The intellectual property of this catalogue is assigned to all countries. Translation, reproduction, electronic storage and full or partial adaption by any means (including microfilms and photocopies) of its contents, without prior written authorisation from Piusi S.p.a., entails a violation of PIUSI S.P.A.'s copyrights and constitutes an act of unfair competition. The products shown in the images of this catalogue are protected according to the regulation in force regarding industrial property. The information contained in this catalogue is as accurate as possible and complies, as far as possible, with existing regulations at the time of its publication. We therefore reserve the right to make subsequent modifications in line with modifications to regulations and/ or in relation to any production requirements that are deemed necessary for safety reasons. The technical specifications indicated in this catalogue cancel out and replace those already present in the previous general catalogue and in the product catalogues.

The updates and product data sheets are available in PDF format on our website:

www.piusi.com



CERTIFIED
ISO 9001 / ISO 14001

SINCE 1953, PIUSI HAS BEEN PUTTING ITALIAN ENGINEERING PROWESS TO THE SERVICE OF ITS CUSTOMERS, WITH THE NECESSARY PROFESSIONALISM AND INTEGRITY TO BUILD STABLE, LONG-LASTING RELATIONSHIPS.

OUR MISSION IS TO PROVIDE SIMPLE, INTELLIGENT, PROFESSIONAL-QUALITY SOLUTIONS FOR THE TRANSFER, DISPENSING AND MEASUREMENT OF LUBRICANTS, FUELS AND LIQUIDS, WITH FULL CONSIDERATION FOR HUMAN AND ENVIRONMENTAL HEALTH.



PIUSI S.p.A.
Headquarters
46029 Suzzara (Mantova) Italy
tel. +39 0376 534561
fax. +39 0376 536393
e-mail: piusi@piusi.com
www.piusi.com



PIUSI USA, Inc.
3901 Anglers Avenue
Fort Lauderdale, FL 33312
tel.: 954 584 1552
fax.: 954 584 1554
Email: piusiusa@piusiusa.com
www.piusiusa.com